


Grade 1 Vertical Rod

## EX9400 SERIES

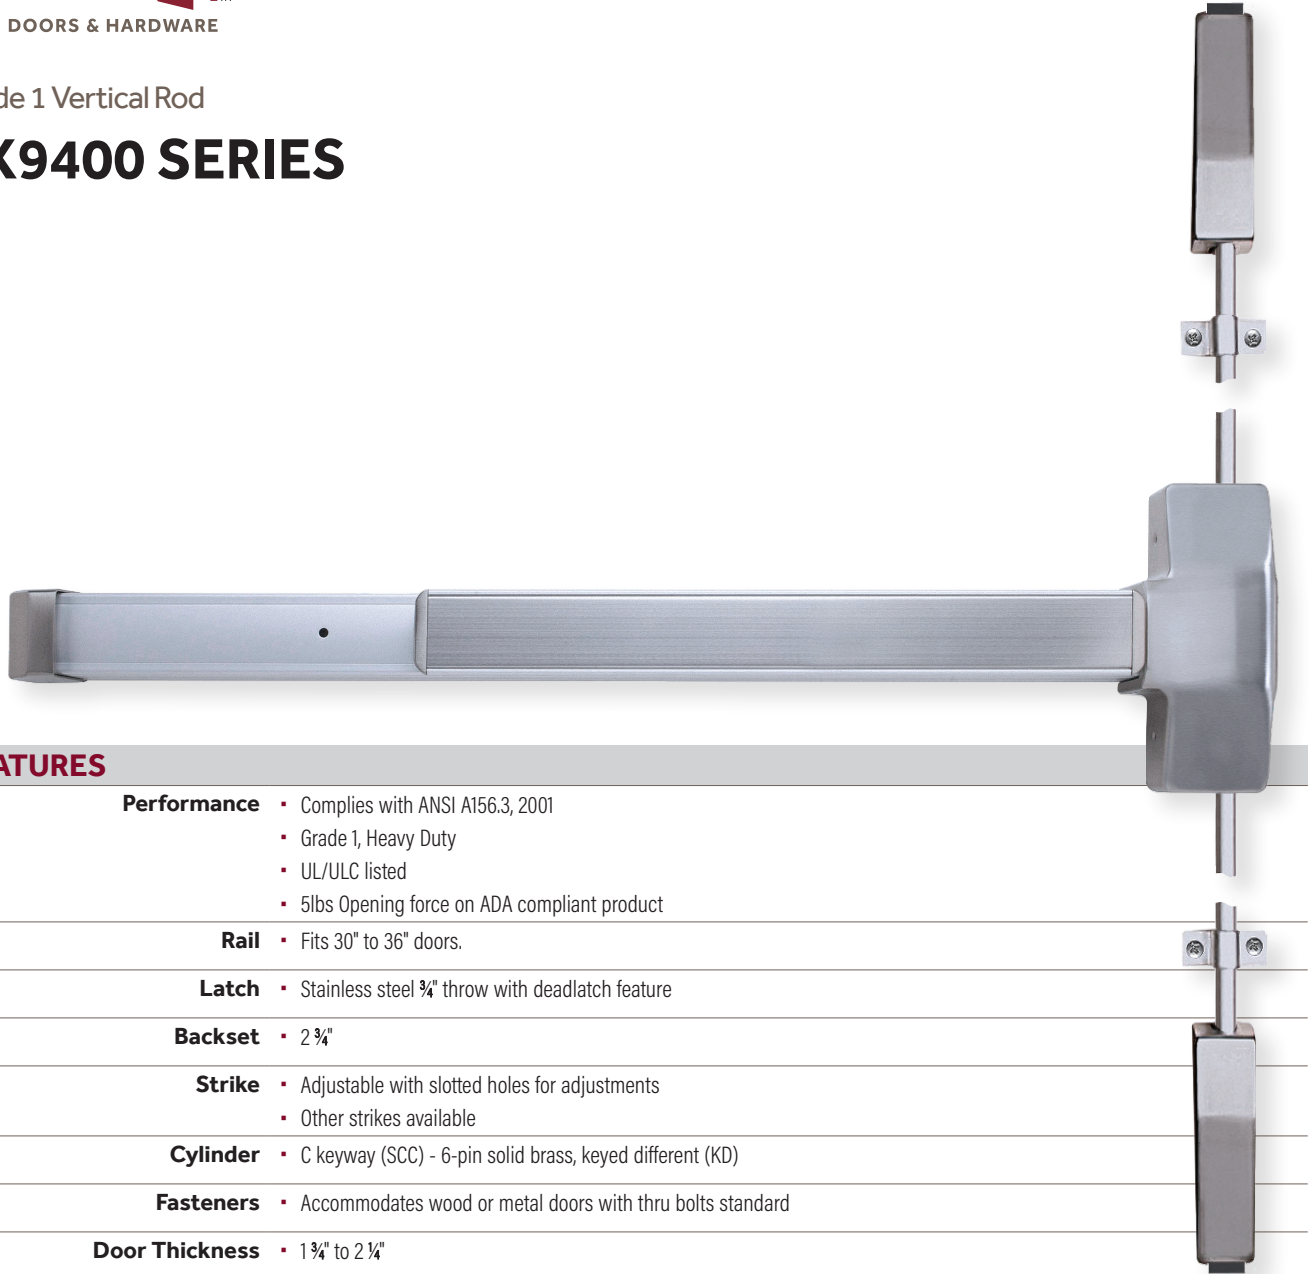

### FEATURES

- |                         |  |
|-------------------------|--|
| <b>Performance</b>      | <ul style="list-style-type: none"> <li>Complies with ANSI A156.3, 2001</li> <li>Grade 1, Heavy Duty</li> <li>UL/ULC listed</li> <li>5lbs Opening force on ADA compliant product</li> </ul> |
| <b>Rail</b>             | <ul style="list-style-type: none"> <li>Fits 30" to 36" doors.</li> </ul>   |
| <b>Latch</b>            | <ul style="list-style-type: none"> <li>Stainless steel <math>\frac{3}{4}</math>" throw with deadlatch feature</li> </ul>   |
| <b>Backset</b>          | <ul style="list-style-type: none"> <li>2 <math>\frac{3}{4}</math>"</li> </ul>  |
| <b>Strike</b>           | <ul style="list-style-type: none"> <li>Adjustable with slotted holes for adjustments</li> <li>Other strikes available</li> </ul>   |
| <b>Cylinder</b>         | <ul style="list-style-type: none"> <li>C keyway (SCC) - 6-pin solid brass, keyed different (KD)</li> </ul>   |
| <b>Fasteners</b>        | <ul style="list-style-type: none"> <li>Accommodates wood or metal doors with thru bolts standard</li> </ul>  |
| <b>Door Thickness</b>   | <ul style="list-style-type: none"> <li>1 <math>\frac{3}{4}</math>" to 2 <math>\frac{1}{4}</math>"</li> </ul>   |
| <b>Door Preparation</b> | <ul style="list-style-type: none"> <li>Surface mounted</li> <li>Covers 161 prep</li> </ul>   |
| <b>Finishes</b>         | <ul style="list-style-type: none"> <li>Satin Chrome (US26D), Polished Brass (US3)</li> </ul>   |
| <b>Warranty</b>         | <ul style="list-style-type: none"> <li>Lifetime limited</li> </ul>   |

# EX9400 SERIES

## OPTIONS

**KEYING** 6-pin cylinders, can be pinned to 5-pin.

**Cylinders** Arrow A (ARA), Corbin 59A1 (C059A1), Corbin 60 (C06), Corbin Russwin L4 (CL4), Options Kwikset (KW1), Russwin D1 (RD1), Sargent LA (SAL), Schlage E (SCE), Schlage F (SCF), Weiser E (WRE), Yale 8 (YA8), Yale GA (YGA)

**Tell Cylinder** Restricted Tell keyway cylinder can key both the cylinder and interchangeable core in one lock. The cylinders and IC cores are interchangeable. Tell keyway cylinder is available only keyed to 6-pin. Tell IC cylinder can be keyed to 6-pin or 7-pin interchangeable core (IC)

**IC Keyway Cylinders (Available 6- or 7-Pin)** Best A (BA), Best B (BB), Best C (BC), Best D (BD), Best E (BE), Best F (BF), Best G (BG), Best H (BH), Best J (BJ), Best K (BK), Best L (BL), Best M (BM), Best Q (BQ), Best U (BU), Black construction core (BLK), Less core (00), Not specified (XX)

**Keying Options** Grand Master Key (GMK), Construction Master Key (CMK), Master Key (MK), Keyed Different (KD), Keyed Alike (KA), Interchangeable Core uncombined (IC), 0-bitted (0BIT)

**EXTERIOR TRIM** Exterior Blank Pull (8PDT), Exterior Pull With Cylinder Cut Out (8P03), Entry Ball Knob Trim (EMP808), Passage Ball Knob Trim (EMP875), Storeroom Ball Knob Trim (EMP886), Entry Lever Trim Without Clutch (CTL), Exterior Thumbpiece Trim (TP81), Pull Trim With Rim Cylinder (PT881), Exterior Escutcheon Lever Trim (ESCH), Heavy-Duty Escutcheon Entry Lever Trim (ESCHHD)

**UL LISTED** 3 hour fire rated device available

**FIRE RATED** Fire rated device available for use on doors rated up to 3 hours

### TELL FINISHES



US3  
Polished Brass



US26D  
Satin Chrome



US32D  
Satin Stainless Steel