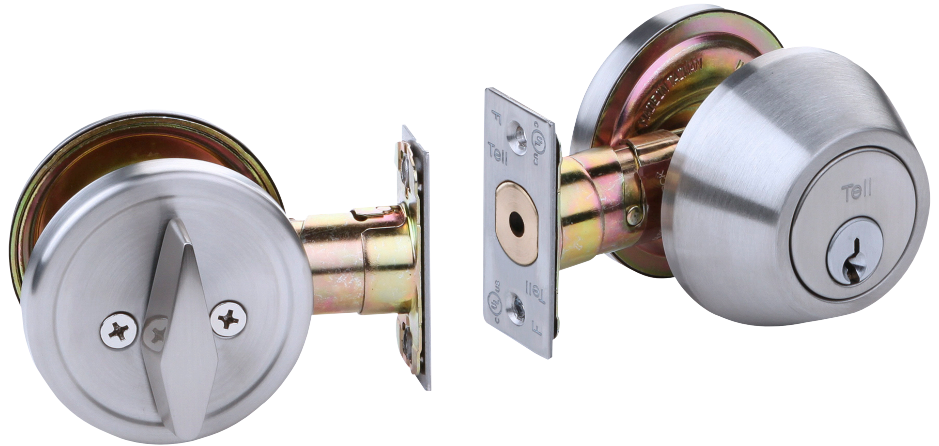


Standard-Duty Grade 2 Tubular

DB2000 SERIES



FEATURES

- | | |
|-------------------------|---|
| Performance | ▪ Complies with ANSI A156.5, Grade 2, 150,000 cycles |
| Chassis | ▪ Tubular, steel |
| Deadbolt | <ul style="list-style-type: none"> ▪ 1" x 2 1/4", square corner faceplate ▪ 1" housing diameter (stainless steel) ▪ 1" throw ▪ Roller bar (added security for hacksaw or reciprocating blade cutting) |
| Backset | <ul style="list-style-type: none"> ▪ Adjustable 2 3/8" to 2 1/4". 2 1/4" x 1" faceplate standard ▪ Drive-In optional. |
| Strike | ▪ 1 1/8" x 2 3/4", square corner faceplate |
| Cylinder | <ul style="list-style-type: none"> ▪ C keyway (SCC) ▪ 6-pin solid brass ▪ Keyed different (KD) |
| Keys | ▪ Two nickel silver per lock cylinder |
| Door Thickness | ▪ 1 3/8" - 1 3/4" |
| Door Preparation | <ul style="list-style-type: none"> ▪ 2 1/8" diameter for bore ▪ 1" diameter for bolt ▪ Fits standard 161 door prep |
| Warranty | ▪ Lifetime limited |

Standard-Duty Grade 2 Tubular

DB2000 SERIES

OPTIONS

Keying	6-pin cylinders, can be pinned to 5-pin.
Cylinders	Arrow A (ARA), Corbin 59A1 (C059A1), Corbin 60 (C06), Corbin Russwin L4 (CL4), Options Kwikset (KW1), Russwin D1 (RD1), Sargent LA (SAL), Schlage E (SCE), Schlage F (SCF), Weiser E (WRE), Yale 8 (YA8), Yale GA (YGA)
IC Keyway Cylinders Available 6- or 7-Pin	Best A (BA), Best B (BB), Best C (BC), Best D (BD), Best E (BE), Best F (BF), Best G (BG), Best H (BH), Best J (BJ), Best K (BK), Best L (BL), Best M (BM), Best Q (BQ), Best U (BU), Black construction core (BLK), Less core (00), Not specified (XX)
Keying Options	Grand Master Key (GMK), Construction Master Key (CMK), Master Key (MK), Keyed Different (KD), Keyed Alike (KA), Interchangeable Core uncombined (IC), 0-bitted (0BIT)
Available Functions	Double Cylinder 2041 Single Cylinder 2051 Communicating 25 Communicating with Backplate K25

Tell Finishes



US3
Polished Brass



US32D
Satin Stainless Steel




US19
Matte Black

ACCESSORIES

DRIVE-IN LATCHES




CL100177 — 2 3/4" Guarded, US26D


Drive-in latch, adjustable..



DB2000 SERIES

FUNCTION CHART

OUTSIDE	INSIDE	FUNCTION	FEATURES	ANSI
		Double Cylinder 41	• Deadbolt operated by key outside, key inside	E0141
		Single Cylinder 51	• Deadbolt operated by key outside, thumb turn inside	E0151
		Single Cylinder Heavy Duty 51HD	• Deadbolt operated by key outside, thumb turn inside	E0152

OUTSIDE	INSIDE	FUNCTION	FEATURES	ANSI
		Communicating 25	• Deadbolt operated by inside, thumb turn only	E0162
		Communicating with Backplate K25	• Deadbolt operated by inside, thumb turn only with backplate	E0162

HOW TO ORDER (see product page for complete lists of options)

TRIM	GRADE	PRODUCT FAMILY	FUNCTION	FINISH	BACKSET	KEYWAY CYLINDER	IC KEYWAY CYLINDER	KEYING	
						XX	- Not Specified	OBIT	- 0-Bitted
						00	- Less Core	IC	- Interchangeable Core Uncombined
						BLK	- Construction Core - Black	KA	- Keyed Alike
						BD	- Best D	KD	- Keyed Different
						BC	- Best C	MK	- Master Key
				US3	- Bright Brass	BB	- Best B	CMK	- Construction Master Key
DB	- Lever	0		US32D	- Satin Stainless Steel	BA	- Best A	GMK	- Grand Master Key
DB	2	0	41	US32D	ADJ	BA†	SCC†	GMK	
	2		41	- Double Cylinder	ADJ	- Adjustable 2 3/8" - 2 3/4"	SCC	- C Keyway (SCC) 6-Pin	
			41IC	- Double Cylinder IC	DI	- Drive-in Latch	ARA	- Arrow A	
			51	- Single Cylinder			C059A1	- Corbin 59A1	
			51IC	- Single Cylinder IC			C06	- Corbin 60	
			51HD	- Single Cylinder HD			CL4	- Corbin Russwin L4	
			25	- Communicating			KW1	- Kwikset KW1	
			K25	- Communicating w/ backplate			WRE	- Weiser E	

[†] Choose one Keyway format; either Restricted /Non-IC Keyway Cylinder or IC Keyway Cylinder.

All cylinders come keyed 6-pin, can be keyed 5-pin on request.