

COMMERCIAL DOORS & HARDWARE



Product Catalog



THE COMPLETE PACKAGE – Commercial Doors and Frames, Door Hardware and Trim.

800-433-4047 | tellmfg.com

CORPORATE

Tell Manufacturing
18 Richard Drive
Lititz, PA 17543

LOCATIONS

Alabama: Homewood
California: Mira Loma
Indiana: Elkhart
Texas: Grand Prairie
Texas: Houston

CONTACT INFORMATION

800.433.4047
p: 717.625.2990
f: 888.370.3253
e: tell.sales@spectrumbrands.com


Tell Manufacturing

Product Comparison Charts

LOCKSETS

TELL COMPARISON

GRADE 1 LEVERSET HEAVY DUTY

LC1200 Series	Cal Royal Genesys Series
	Yale 5400 Series
	Hager 3400 Series
	Sargent 10 Line
	Falcon T Series
	Taymor Knight
	Dorex GX1L Series

GRADE 2 LEVERSET STANDARD DUTY

LC 2600 Series	Cal Royal SL, CSL, XP & ALC
	Falcon W500 Series
	Hager 3500 Series
	Corbin CL3800 Series
	Sargent 65 Series
	Schlage AL Series
	Yale 5300 LN Series
	Taymor Duke
	Dorex FC Series

GRADE 2 LEVERSET HEAVY DUTY

LC 2400 Series	Cal Royal SL, CSL, XP & ALC
	Falcon W500 Series
	Hager 3500 Series
	Corbin CL3800 Series
	Sargent 65 Series
	Schlage AL Series
	Yale 5300 LN Series
	Taymor Knight
	Dorex GX1L Series

GRADE 2 KNOBSET HEAVY DUTY

KC2300 Series	Cal Royal BA Series
	Arrow 151
	Corbin 5600 Series
	Russwin CK3300
	Russwin CK2400
	Sargent 6 Line
	Schlage A Series
	Yale 5300 Series
	Taymor York
	Dorex TL Series

DOOR CLOSERS

TELL COMPARISON

GRADE 1 CLOSERS

600 Series	Cal Royal 300 Series
	Design 116 Series
	Dorma 7400
	International 9000
	Norton 1601
	Yale 51 Series
	Sargent 1130
	Norton 8501
	Yale 3501
	Taymor 600 Series
	Dorex 5400 Series

700 Series

	Cal Royal 900 Series
	Design 316
	Dorma 7800
	Norton 8601
	Sargent 1230
	Yale 3501
	Taymor 1900 Series

800 Series

	Cal Royal 801
	Design 316
	Dorma 8616
	International 9000
	LCN 1460
	Norton 8000
	Yale 3000
	Sargent 1430
	Taymor 4000 Series

900 Series

	Cal Royal 441
	Design 416
	Dorma 8916
	Norton 7500
	Yale 4400
	Sargent 281

EXIT DEVICES

TELL COMPARISON

GRADE 1 HEAVY DUTY

	
---	--

7000 Series Exit Device

Cal Royal 9800
Design 1000R
Von Duprin 99
Hager 4500
Sargent 8800

	
---	--

8000 Series Exit Device

Cal Royal 2200
Design 2000R
Von Duprin 22
Hager 4700
Sargent 20 Series
Taymor 9700 Series
Dorex 8500 Series

	
---	--

9000 Series Exit Device

Cal Royal 9800
Design 1000R
Von Duprin 99
Hager 4500
Sargent 8800

COMMERCIAL DOORS & HARDWARE

table of contents

LOCKSETS & MORTISE LOCK

PAGE

GRADE 1



KC1100 Series Cylindrical Knobset **1**



LC1200 Series Cylindrical Leverset **5**



ML1300 Series Mortise Lockset **9**

GRADE 2



LT2000 Series Tubular Leverset **13**



KT2100 Series Tubular Knobset **17**



KC2300 Series Cylindrical Knobset **21**



LC2400 Series Cylindrical Leverset **25**



LC2600 Series Cylindrical Leverset **29**



LC2700 Series Cylindrical Leverset **33**

GRADE 3



KC3600 Series Cylindrical Knobset **36**







LC3600 Series Cylindrical Leverset **37**

COMMERCIAL DOORS & HARDWARE

table of contents

DEADBOLTS, STOREFRONT MORTISE LOCKS, CYLINDERS, KEYING & CAMS

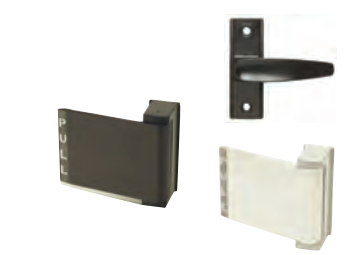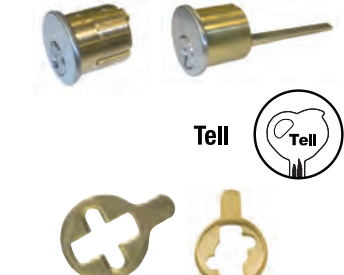	PAGE
	DEADBOLTS DB1000 Series 41 DB2000/DB2400 Series 43 Indicator Deadbolt 45
	STOREFRONT MORTISE LOCKS Storefront Deadbolt & Hook Bolt Mortise Lock 46 Storefront Deadlatch Mortise Lock 48 Storefront Cylinders, Turns & Levers 50
	Storefront Paddle Latches, Pull Handles & Combo Push/Pull 52
	CYLINDERS Mortise & Rim Cylinders 54 Keying / Tell Restricted Keyway Cylinder 55 Standard & IC Core Cams 56

Grade One
White Tab

Grade One
White Tab back

KC1100 SERIES

Heavy-Duty Commercial Grade 1 Knobsets



Empire (EMP)

Standard Features

- **Performance** Complies with ANSI A156.2 - 2003, Series 4000, Grade 1, 800,000 cycles, UL/ULC listed for 3 hour fire door
- **Chassis** Cylindrical, steel - coated with zinc dichromate (corrosion resistance)
- **Latch** 1-1/8" x 2-1/4", square corner faceplate, 1" housing diameter (stainless steel), 1/2" throw
- **Rose** 3" diameter
- **Backset** 2-3/4"
- **Strike** Square corner 1-1/4" x 4-7/8" ANSI **ASA Strike**
- **Standard Cylinder** Standard cylinder Schlage (SCC) - 6-pin solid brass, C keyway, keyed different (KD).
- **Keys** Two nickel silver per lock cylinder
- **Door Range** 1-3/8" to 2"
- **Door Preparation** 2-1/8" diameter for bore, 1" diameter bore for latchbolt. Fits standard 161 door prep.
- **Warranty** 5 year limited








Optional Features

- **Strike** **T Strike** (1-1/8" x 2-3/4"), and **F Strike** (full lip)

Keying Options

- **Tell Cylinder** Restricted Tell keyway cylinder available, optional. Tell keyway cylinder is available **only** keyed to 6-pin.
- **Other Cylinder Options** Arrow A (ARA), Corbin 59A1 (C059A1), Corbin 60 (C06), Corbin Russwin L4 (CL4), Kwikset (KW1), Russwin D1 (RD1), Sargent LA (SAL), Schlage E (SCE), Schlage F (SCF), Weiser E (WRE), Yale 8 (YA8), Yale GA (YGA)
ALL CYLINDERS 6-PIN. CAN ALSO BE PINNED 5-PIN.
- **Keying Options** Grand master key (GMK), construction master key (CMK), master key (MK), keyed different (KD), keyed alike (KA), 0-bitted (0BIT)

KC1100 Series Function Chart

FUNCTION	FUNCTION NO.	OUTSIDE	INSIDE	FUNCTION DESCRIPTION	ANSI NO.
Entrance	81			<ul style="list-style-type: none"> Deadlocking latchbolt operated by knob and turn from either side Outside knob locked by push button from inside Unlocked by key from outside or rotating inside knob When outside knob locked by push and turn button from inside, key from outside or rotating inside knob retracts latch, does not unlock outside knob 	F81
Entry/Office	82			<ul style="list-style-type: none"> Deadlocking latchbolt operated by knob from either side except when outside knob is locked by push button on inside. When outside knob is locked, operating key in outside knob or operating inside knob unlocks push button and retracts latchbolt. Closing door does not release push button 	F82
Storeroom	86			<ul style="list-style-type: none"> Deadlocking latchbolt operated by rotating inside knob or key in outside knob Outside knob always fixed 	F86
Classroom	84			<ul style="list-style-type: none"> Deadlocking latchbolt operated by knob from either side Outside knob locked or unlocked by key from outside Inside knob always operates latch 	F84
Passage/Closet	75			<ul style="list-style-type: none"> Latchbolt operated by knob from either side at all times 	F75
Privacy Bedroom/Bathroom	76			<ul style="list-style-type: none"> Latchbolt operated by knob from either side Outside knob locked by push button on inside Unlocked by emergency release on outside, rotating inside knob, or closing door 	F76
Single Dummy	01			<ul style="list-style-type: none"> Pull knob one side No mechanical operation 	

ACCESSORIES

KC1100 Series Latch

CL100181 — 2-3/4" Guarded, US32D

CL100531 — 2-3/4" Guarded, US3

UL/ULC listed latchbolt with deadlatching function. 1/2" throw. 2-3/4" backset. Fits 161 door prep (2-1/8" hole, 1" latch hole).



KC1100 Series Strikes

CL100186 — ASA Strike, US32D

CL100187 — ASA Strike, US3

CL100415 — ASA Strike, US10B

For metal frames. (1-1/4" x 4-7/8" x 3/32").

CL100191 — T Strike, US32D

CL100189 — T Strike, US3

CL100420 — T Strike, US10B

For wood frames. (1-1/8" x 2-3/4" x 3/32").

CL100190 — F Strike, US32D

CL100192 — F Strike, US3

CL100581 — F Strike, US10B

For wood residential applications. (1-5/8" x 2-1/4" x 3/32").



KC1100 Series Non-Restricted Keyway

CL100219 —

Cylinder, Schlage C, US26D

CL100584 —

Cylinder, Schlage C, US4

Standard brass 6-pin cylinder SCC keyway, optional keyways available, (see price list).



KC1100 Series Tell Restricted Keyway

TELL CYLINDERS:

CL101503 —


6 pin Tell cylinder, US26D

CL101504 —

6 pin Tell cylinder, US4



How to Order KC1100 Series

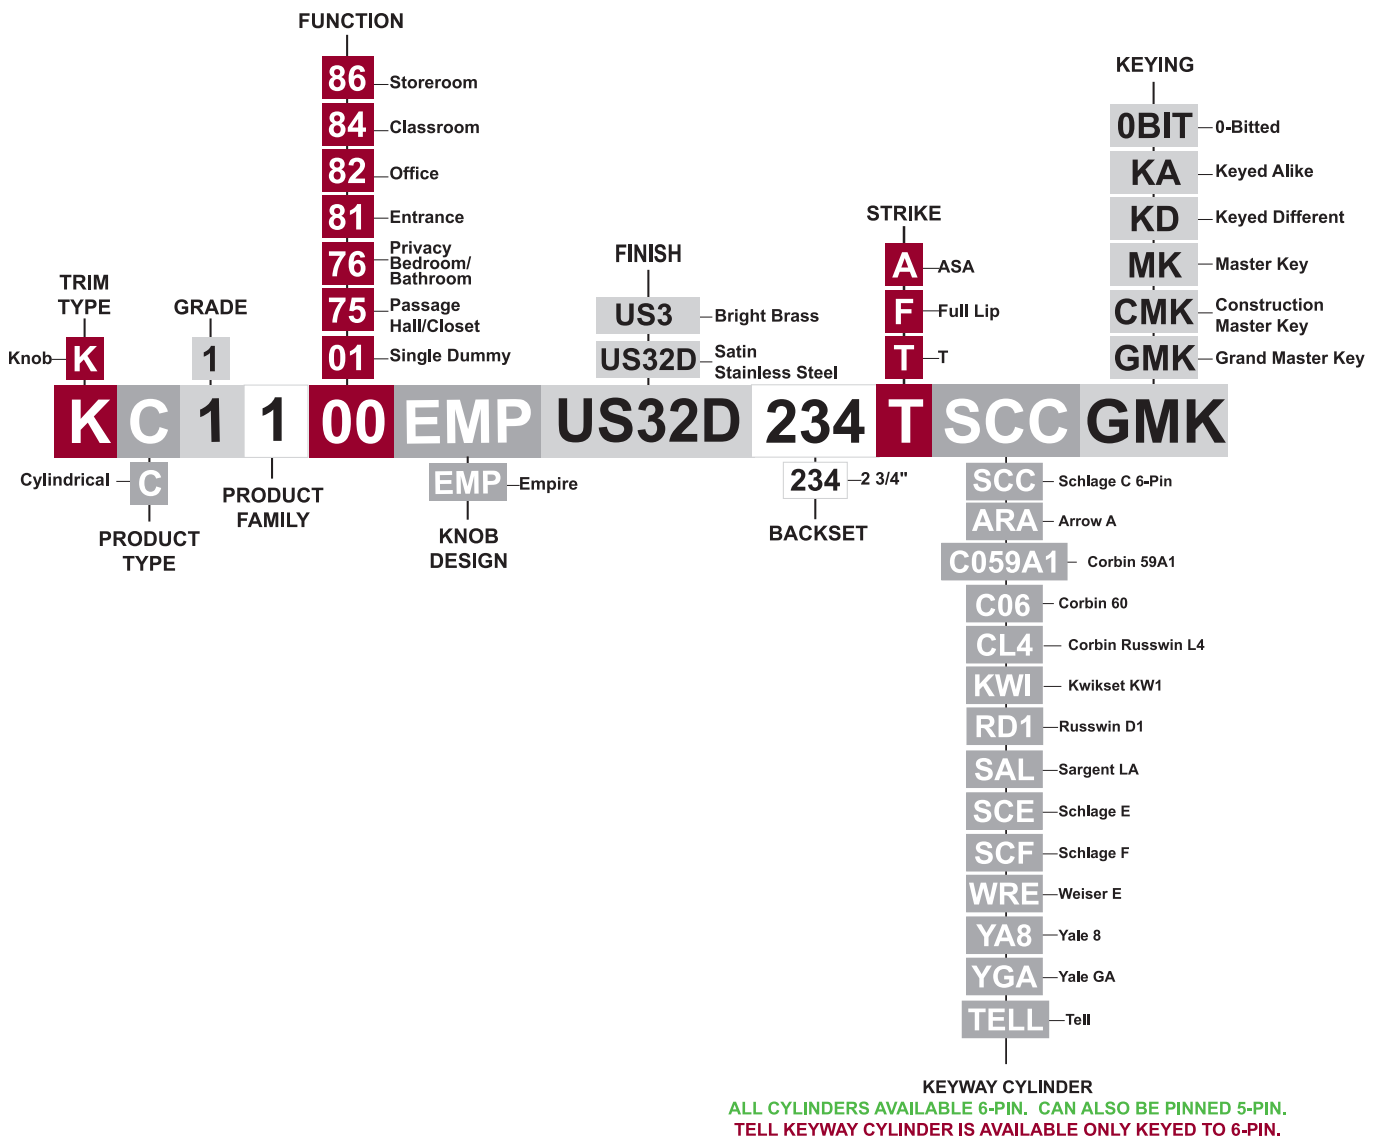

LC1200 SERIES

Heavy-Duty Commercial Grade 1 Leversets



Standard Features

■ Performance

Cortland (CTL)

Buckingham (BUC)

Complies with ANSI A156.2, Series 4000, Grade 1, (800,000 cycles), UL/ULC listed for 3 hour fire door ANSI A117.1 American Disabilities Act (ADA)

■ Chassis

Cylindrical, steel - coated with zinc dichromate (corrosion resistance), freewheeling clutch (added security from hammer attacks), independent spring cages

■ Lever

Non-handed, solid cast

■ Latch

1-1/8" x 2-1/4", square corner faceplate, 1" housing diameter (stainless steel), 1/2" throw

■ Rose

3-1/2" diameter

■ Backset

2-3/4"

■ Strike

Square corner 1-1/4" x 4-7/8" ANSI **ASA Strike**

■ Standard Cylinder

Standard cylinder Schlage (SCC) - 6-pin solid brass, C keyway, keyed different (KD).

■ Keys

Two nickel silver per lock cylinder

■ Cylinder

Other manufacturers including small format interchangeable cores

■ Door Range

1-3/8" - 2"

■ Door Preparation

2-1/8" diameter for lever, 1" diameter for latchbolt. Fits standard 161 door prep with through-bolting through the door.

■ Warranty

5 year limited

Optional Features

■ Strike

T Strike (1-1/8" x 2-3/4"), and **F Strike** (full lip)

Keying Options

■ Tell Cylinder

Restricted Tell keyway cylinder can key both the cylinder and interchangeable core in one lock. The cylinders and IC cores are interchangeable. Tell keyway cylinder is available **only** keyed to 6-pin. Tell IC cylinder can be keyed to 6-pin or 7-pin interchangeable core (IC).

■ Other Cylinder Options

Arrow A (ARA), Corbin 59A1 (C059A1), Corbin 60 (C06), Corbin Russwin L4 (CL4), Kwikset (KW1), Russwin D1 (RD1), Sargent LA (SAL), Schlage E (SCE), Schlage F (SCF), Weiser E (WRE), Yale 8 (YA8), Yale GA (YGA)

ALL CYLINDERS 6-PIN. CAN ALSO BE PINNED 5-PIN.

■ IC Keyway Cylinder

AVAILABLE 6- OR 7-PIN

Tell, Best A (BA), Best B (BB), Best C (BC), Best D (BD), Best E (BE), Best F (BF), Best G (BG), Best H (BH), Best J (BJ), Best K (BK), Best L (BL), Best M (BM), Best Q (BQ), Best U (BU), Black construction core (BLK), Less core (00), Not specified (XX)

■ Keying Options

Grand master key (GMK), construction master key (CMK), master key (MK), keyed different (KD), keyed alike (KA), interchangeable core uncombined (IC), 0-bitted (0BIT)

LC1200 Series Function Chart



FUNCTION	FUNCTION NO.	OUTSIDE	INSIDE	FUNCTION DESCRIPTION	ANSI NO.
Entrance	81			<ul style="list-style-type: none"> Latchbolt operated by lever from either side Outside lever locked by push button from inside Unlocked by key from outside or rotating inside lever When outside lever locked by push and turn button from inside, key from outside or rotating inside lever retracts latch, does not unlock outside lever 	F81
Office	82			<ul style="list-style-type: none"> Deadlocking latch bolt operated by lever from either side except when outside lever is locked by push button or other locking device on inside. When outside lever is locked, operating key in outside lever or operating inside lever unlocks push button or other locking device and retracts latch bolt. Closing door does not release push button or other locking device. 	
Classroom	84			<ul style="list-style-type: none"> Latchbolt operated by lever from each side Outside lever locked or unlocked by key from outside Inside lever always operates latch 	F84
Storeroom	86			<ul style="list-style-type: none"> Latch operated by rotating inside lever or key in outside lever Outside lever always fixed 	F86
Double Cylinder Storeroom	91			<ul style="list-style-type: none"> Deadlocking latchbolt operated by either lever Key in either lever locks or unlocks both levers 	F80
Intruder	110			<ul style="list-style-type: none"> For classroom doors Deadlatching latchbolt Either lever operates latchbolt (except when outside lever is locked by key from either side) Outside lever remains locked upon egress Inside lever always active 	F110
Privacy Bedroom/Bathroom	76			<ul style="list-style-type: none"> Latchbolt operated by lever from either side Outside lever locked by push button on inside Unlocked by emergency release on outside, rotating inside lever, or closing door 	F76
Passage Hall/Closet	75			<ul style="list-style-type: none"> Latchbolt operated by lever from either side at all times 	F75
Exit Latch	80			<ul style="list-style-type: none"> Latchbolt operated by lever from one side at all times 	
Single Dummy	01			<ul style="list-style-type: none"> Pull lever one side No mechanical operation 	

ACCESSORIES

LC1200 Series Latches

CL100181 —
2-3/4" Guarded, US32D

CL100531 —
2-3/4" Guarded, US3

CL100182 —
2-3/4" Guarded with
kickoff, US32D
UL/ULC listed guarded
latchbolt with deadlatching
function. 1/2" throw.
2-3/4" backset. Fits 161
door prep (2-1/8" hole,
1" latch hole).

CL100906 —
2-3/4" Unguarded,
US32D

CL100907 —
2-3/4" Unguarded
with kickoff, US32D
UL/ULC listed
unguarded latchbolt
with non-deadlatching
function. 1/2" throw.
2-3/4" backset. Fits
161 door prep (2-1/8"
hole, 1" latch hole).



LC1200 Series Strikes

CL100186 —
ASA Strike, US32D

CL100187 —
ASA Strike, US3

CL100415 —
ASA Strike, US10B
For metal frames.
(1-1/4" x 4-7/8" x
3/32").

CL100191 —
T Strike, US32D

CL100189 —
T Strike, US3

CL100420 —
T Strike, US10B
For wood frames.
(1-1/8" x 2-3/4" x
3/32").

CL100190 —
F Strike, US32D

CL100192 —
F Strike, US3

CL100581 —
F Strike, US10B
For wood residential
applications.
(1-5/8" x 2-1/4" x
3/32").



LC1200 Series Non-Restricted Keyway

CL100219 —
Cylinder, Schlage C, US26D

CL100584 —
Cylinder, Schlage C, US4
Standard brass 6-pin cylinder
SCC keyway, optional keyways
available, (see price list).



CL100268 —
IC Core Best A 6 Pin, US26D

CL100270 —
IC Core Best A 7 Pin, US26D

CL100269 —
IC Core Best A 6 Pin, US4

CL100271 —
IC Core Best A 7 Pin, US4
Small format interchangeable
core brass cylinder 6-pin stan-
dard, 7-pin available. Best "A"
keyway standard.



LC1200 Series Tell Restricted Keyway

TELL CYLINDERS:

CL101503 —
6 pin Tell cylinder, US26D

CL101504 —
6 pin Tell cylinder, US4



**TELL INTERCHANGEABLE
CORES:**

CL101499 —
6 pin Tell IC core, US26D

CL101500 —
6 pin Tell IC core, US4


CL101501 —
7 pin Tell IC core, US26D

CL101502 —
7 pin Tell IC core, US4



FINISHES: US32D=Satin Stainless Steel, US3=Bright Brass, US26D=Satin Chrome, US4=Satin Brass, US10B=Oil Rubbed Bronze

How to Order LC1200 Series

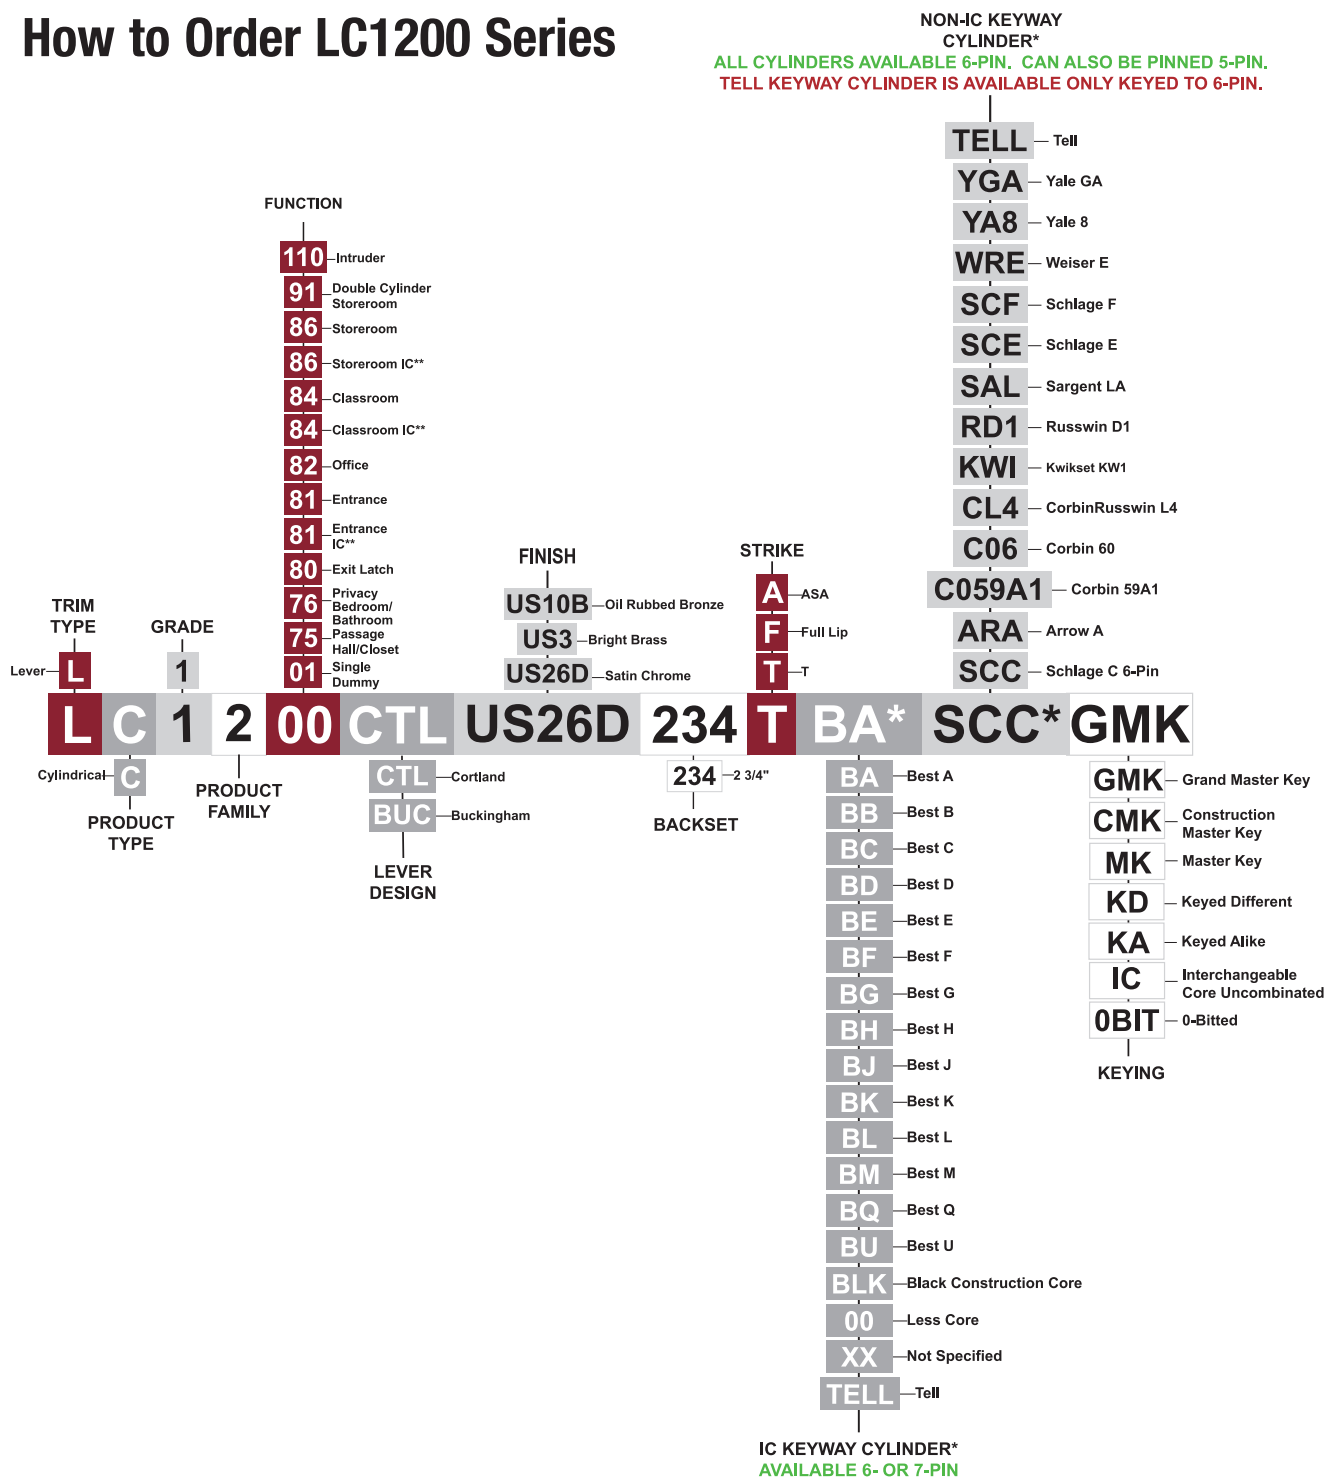

* Choose one keyway format: either IC KEYWAY CYLINDER or Non-IC KEYWAY CYLINDER

**** IC functions in Satin Chrome (26D) only**

ML1300 SERIES

Grade 1 Heavy-Duty Commercial Mortise Locksets



Standard Features

■ Performance

Complies with ANSI A156.13, Series 1000, Grade 1, ANSI A117.1 American Disabilities Act (ADA), 1,000,000 cycles Mortise, steel - coated with zinc dichromate (corrosion resistance), 13 gauge cold rolled steel

■ Chassis

■ Lever

Non-handed, field reversible, solid forged brass

■ Trim

Roses, escutcheon, turns (solid forged brass)

■ Latch bolt

Latch 3/4" throw (stainless steel), deadbolt 1" throw (stainless steel), anti-friction

■ Backset

2-3/4"

■ Strike

4-7/8" curved strike

■ Door Range

1-3/4" to 2"

■ Door Preparation

Per function and template

■ Cylinder

Schlage (SCC) - 6-pin solid brass, C keyway, keyed different (KD)

■ Other Cylinder

Arrow A (ARA), Corbin 59A1 (C059A1), Corbin 60 (C06), Corbin Russwin L4 (CL4), Kwikset (KW1), Russwin D1 (RD1), Sargent LA (SAL), Schlage E (SCE), Schlage F (SCF), Weiser E (WRE), Yale 8 (YA8), Yale GA (YGA)

Options

■ IC Keyway Cylinder

AVAILABLE 6- OR 7-PIN

Best A (BA), Best B (BB), Best C (BC), Best D (BD), Best E (BE), Best F (BF), Best G (BG), Best H (BH), Best J (BJ), Best K (BK), Best L (BL), Best M (BM), Best Q (BQ), Best U (BU), Black construction core (BLK), Less core (00), Not specified (XX)

■ Keys

Two nickel silver per lock cylinder

■ Warranty

5 year limited

Optional Features

■ Strike

Straight lip (stainless steel)

■ Door Range

1-3/4" to 2"

■ Cylinder

Other manufacturers including small format interchangeable cores









■ Keying

Grand master key (GMK), construction master key (CMK), master key (MK), keyed different (KD), keyed alike (KA), 0-bitted (0BIT)



Curved Strike












ML1300 Series Function Chart

FUNCTION	FUNCTION NO.	INSIDE	OUTSIDE	FUNCTION DESCRIPTION	ANSI NO.
Single Deadlock	131			<ul style="list-style-type: none"> ■ Deadbolt by key outside ■ No inside operation 	F18
Double Deadlock	133			<ul style="list-style-type: none"> ■ Deadbolt by either side 	F16
Classroom	132			<ul style="list-style-type: none"> ■ Deadbolt by key outside or by thumbturn lever inside. 	F17
Passage Hall/Closet	126			<ul style="list-style-type: none"> ■ Latchbolt by grip either side ■ Both grips always free 	F01
Store Door	137			<ul style="list-style-type: none"> ■ Latchbolt by grip either side ■ Deadbolt by key either side 	F14
Entrance or Storeroom	135			<ul style="list-style-type: none"> ■ Latchbolt by grip either side ■ Deadbolt by key outside or by thumbturn lever inside 	F21
Privacy Bedroom or Bathroom	179			<ul style="list-style-type: none"> ■ Latchbolt by grip either side ■ Deadbolt by thumbturn lever inside or emergency release tool outside ■ Inside grip simultaneously retracts latchbolt and deadbolt 	F19
Institution or Utility	138			<ul style="list-style-type: none"> ■ Latchbolt by key either side ■ Both grips always rigid ■ Auxiliary latch deadlocks latchbolt 	—

Indicates rigid grip




ML1300 Series Function Chart

FUNCTION	FUNCTION NO.	INSIDE	OUTSIDE	FUNCTION DESCRIPTION	ANSI NO.
Entrance or Public Restroom	186			<ul style="list-style-type: none"> Latchbolt by grip either side, unless outside grip is locked by master key from inside Latchbolt by key outside or by grip inside Auxiliary latch deadlocks latchbolt Inside grip always free 	09
Entrance or Apartment	154			<ul style="list-style-type: none"> Latchbolt by key outside or by grip either side unless outside grip is locked by toggle-action stop Deadbolt by key outside or by thumbturn lever inside 	F10
Entrance or Office	116			<ul style="list-style-type: none"> Latchbolt by key outside or by grip either side unless outside grip is locked by toggle-action stop Auxiliary latch deadlocks latchbolt Inside grip always free 	F04
Classroom	148			<ul style="list-style-type: none"> Latchbolt by grip either side, unless outside grip is locked by key outside 	F05
Storeroom or Closet	115			<ul style="list-style-type: none"> Latchbolt by grip inside or by key outside Outside grip always rigid Auxiliary latch deadlocks latchbolt Inside grip always free 	F07
Privacy	176			<ul style="list-style-type: none"> Latchbolt by grip either side, except when outside is locked by thumbturn inside Operating inside grip, closing door or operating emergency key outside unlocks outside grip 	F22
Dormitory, Entrance or Storeroom	136			<ul style="list-style-type: none"> Latchbolt by grip either side Deadbolt by key outside or by thumbturn lever inside Inside grip simultaneously retracts latchbolt and deadbolt 	F13
Apartment or Dormitory	162			<ul style="list-style-type: none"> Latchbolt by grip either side, unless outside grip is locked by toggle-action stop or by projection of deadbolt Deadbolt by key outside or by thumbturn lever inside Inside grip simultaneously retracts latchbolt and deadbolt; outside grip remains locked 	F12
Half Dummy Trim	211			<ul style="list-style-type: none"> Grip acts as pull only; no operation 	—
Trim	205			<ul style="list-style-type: none"> Grip act as pull only; no operation 	—

Indicates rigid grip

How to Order ML1300 Series

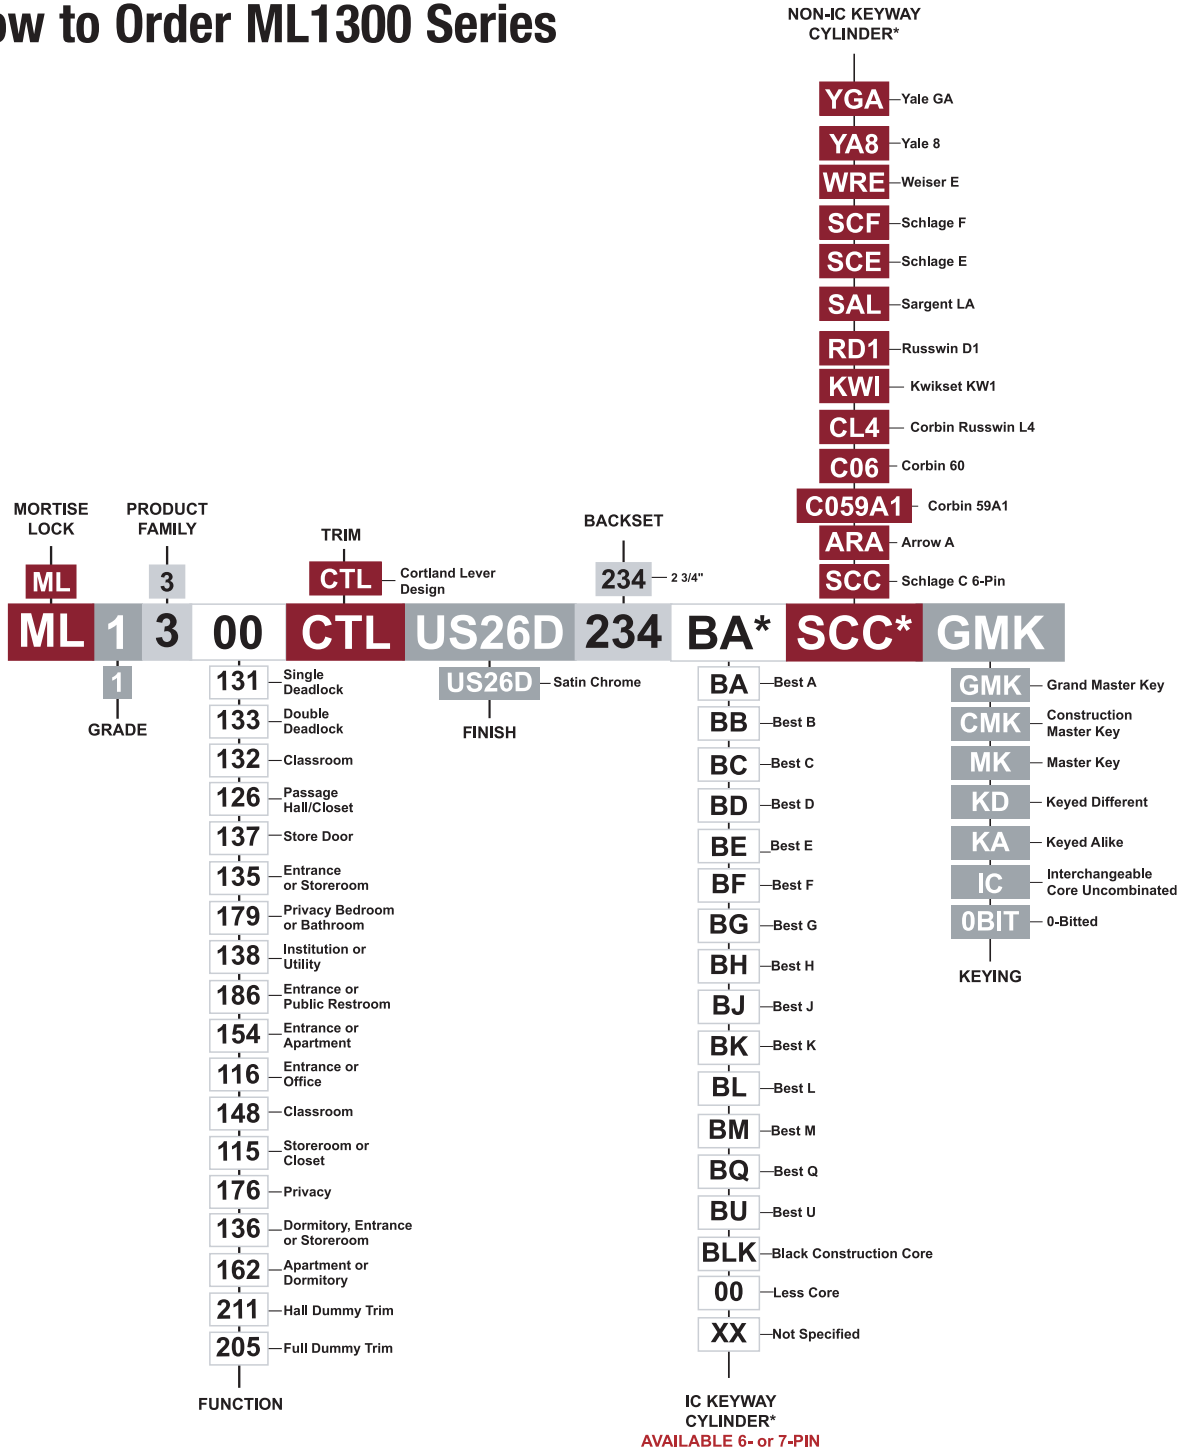

* Choose one keyway format;
either IC KEYWAY CYLINDER or Non-IC KEYWAY CYLINDER

Grade Two
White Tab

Grade Two
White Tab back

LT2000 SERIES

Light-Duty Tubular Grade 2 Leversets



Standard Features

- **Performance** Complies with ANSI A156.2, Series 4000, Grade 2, (400,000 cycles), UL/ULC listed for 3 hour fire door ANSI A117.1 American Disabilities Act (ADA)
- **Chassis** Tubular, steel - coated with zinc dichromate (corrosion resistance)
- **Lever** Non-handed, solid cast
- **Latch** 1" x 2-1/4", square corner faceplate, 1" housing diameter (stainless steel), 1/2" throw
- **Rose** 3" diameter
- **Backset** Adjustable 2-3/4" or 2-3/8"
- **Strike** Square corner 1-1/4" x 4-7/8" ANSI **ASA Strike**
- **Standard Cylinder** Standard cylinder Schlage (SCC) - 6-pin solid brass, C keyway, keyed different (KD).
- **Keys** Two nickel silver per lock cylinder
- **Door Range** 1-3/8" to 2"
- **Door Preparation** 2-1/8" diameter for lever, 1" diameter for latch bolt. Fits standard 161 door prep.
- **Warranty** 1 year limited











Optional Features

- **Strike** **T Strike** (1-1/8" x 2-3/4"), and **F Strike** (full lip)

Keying Options

- **Tell Cylinder** Restricted Tell keyway cylinder available, optional. Tell keyway cylinder is available **only** keyed to 6-pin.
- **Other Cylinder Options** Arrow A (ARA), Corbin 59A1 (C059A1), Corbin 60 (C06), Corbin Russwin L4 (CL4), Kwikset (KW1), Russwin D1 (RD1), Sargent LA (SAL), Schlage E (SCE), Schlage F (SCF), Weiser E (WRE), Yale 8 (YA8), Yale GA (YGA)
ALL CYLINDERS 6-PIN. CAN ALSO BE PINNED 5-PIN.
- **Keying Options** Grand master key (GMK), construction master key (CMK), master key (MK), keyed different (KD), keyed alike (KA), 0-bitted (0BIT)

LT2000 Series Function Chart

FUNCTION	FUNCTION NO.	OUTSIDE	INSIDE	FUNCTION DESCRIPTION	ANSI NO.
Entry/Office	81			<ul style="list-style-type: none"> ■ Latchbolt operated by lever from either side ■ Outside lever locked by turn button from inside ■ Unlocked by key from outside or rotating inside lever 	F82
Storeroom	86			<ul style="list-style-type: none"> ■ Latch operated by rotating inside lever or key in outside lever ■ Outside lever always fixed 	F86
Privacy Bedroom/Bathroom	76			<ul style="list-style-type: none"> ■ Latchbolt operated by lever from either side ■ Outside lever locked by push button on inside ■ Unlocked by emergency release on outside, rotating inside lever 	F76
Passage Hall/Closet	75			<ul style="list-style-type: none"> ■ Latchbolt operated by lever from either side at all times 	F75
Single Dummy	01			<ul style="list-style-type: none"> ■ Pull lever one side ■ No mechanical operation 	

LT2000 Series Latches

CL100506

Drive-in latch, non-dead latching, used where face plate not required. 1/2" throw. Backset adjustable 2-3/8" to 2-3/4".



CL100505

Drive-in latch, dead latching, used where face plate not required. 1/2" throw. Backset adjustable 2-3/8" to 2-3/4".



CL100504, US32D

UL/ULC listed latch bolt with non-deadlatching function. 1/2" throw. Backset adjustable 2-3/8" to 2-3/4". Fits 160 door prep (2-1/8" hole, 7/8" latch hole) or fits 161 door prep (2-1/8" hole, 1" latch hole).



CL100503, US32D

UL/ULC listed latch bolt with deadlatching function. 1/2" throw. Backset adjustable 2-3/8" to 2-3/4". Fits 160 door prep (2-1/8" hole, 7/8" latch hole) or fits 161 door prep (2-1/8" hole, 1" latch hole).



LT2000 Series Strikes

CL100186 — ASA Strike, US32D

CL100187 — ASA Strike, US3

CL100415 — ASA Strike, US10B

For metal frames. (1-1/4" x 4-7/8" x 3/32").



CL100191 — T Strike, US32D

CL100189 — T Strike, US3

CL100420 — T Strike, US10B

For wood frames. (1-1/8" x 2-3/4" x 3/32").



CL100190 — F Strike, US32D

CL100192 — F Strike, US3

CL100581 — F Strike, US10B

For wood residential applications. (1-5/8" x 2-1/4" x 3/32").



LT2000 Series Non-Restricted Keyway

CL100219 —

Cylinder, Schlage C, US26D

CL100584 —

Cylinder, Schlage C, US4

Standard brass 6-pin cylinder
SCC keyway, optional keyways
available (see price list).



LT2000 Series Tell Restricted Keyway

TELL CYLINDERS:

CL101503 —


6 pin Tell cylinder, US26D

CL101504 —

6 pin Tell cylinder, US4



How to Order LT2000 Series

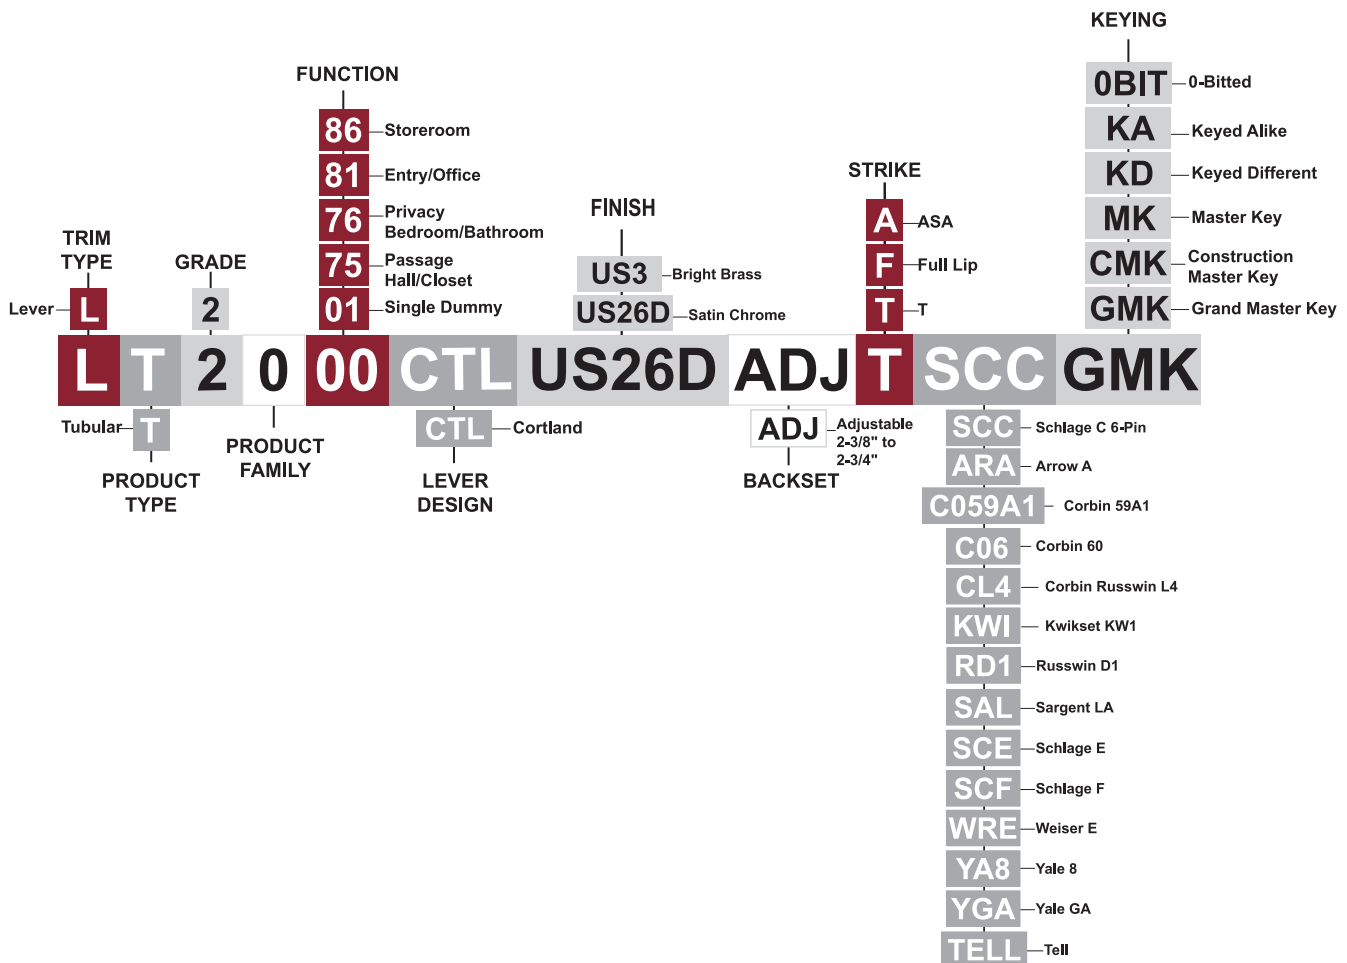

KEYWAY CYLINDER
ALL CYLINDERS AVAILABLE 6-PIN. CAN ALSO BE PINNED 5-PIN.
TELL KEYWAY CYLINDER IS AVAILABLE ONLY KEYED TO 6-PIN.

KT2100 SERIES

Light-Duty Tubular Grade 2 Knobsets



Standard Features

- **Performance** Complies with ANSI A156.2, Series 4000, Grade 2, 400,000 cycles, UL/ULC Listed for 3 hour fire door
- **Chassis** Tubular type construction, non-handed
- **Latch** 1" x 2-1/4", square corner, 3/4" housing diameter, 1/2" throw
- **Rose** 3" diameter
- **Backset** Adjustable 2"-3/8" - 2"-3/4"
- **Strike** Square corner, 1-1/4" x 4-7/8"
- **Standard Cylinder** Standard cylinder Schlage (SCC) - 6-pin solid brass, C keyway, keyed different (KD).
- **Keys** Two nickel silver per lock cylinder
- **Door Range** 1"-3/8" to 1-3/4"
- **Door Preparation** 2"-1/8" hole x 1" latch hole fits standard 161 door prep
- **Warranty** 1 year limited







Optional Features

- **Latch** 1"-1/8" x 2"x1/4", square corner faceplate, 7/8" housing diameter, 1/2" throw (fits 161 door prep)
- **Strike** **T strike** (1"-1/8" x 2"-3/4") and **F strike** (full lip)

Keying Options

- **Tell Cylinder** Restricted Tell keyway cylinder available, optional. Tell keyway cylinder is available **only** keyed to 6-pin.
- **Other Cylinder Options** Arrow A (ARA), Corbin 59A1 (C059A1), Corbin 60 (C06), Corbin Russwin L4 (CL4), Kwikset (KW1), Russwin D1 (RD1), Sargent LA (SAL), Schlage E (SCE), Schlage F (SCF), Weiser E (WRE), Yale 8 (YA8), Yale GA (YGA)
ALL CYLINDERS 6-PIN. CAN ALSO BE PINNED 5-PIN.
- **Keying Options** Grand master key (GMK), construction master key (CMK), master key (MK), keyed different (KD), keyed alike (KA), 0-bitted (0BIT)

KT2100 Series Function Chart

FUNCTION	FUNCTION NO.	OUTSIDE	INSIDE	FUNCTION DESCRIPTION	ANSI NO.
Entry/Office	81			<ul style="list-style-type: none"> ■ Deadlocking latchbolt operated by knob from either side ■ Outside knob locked by push button from inside ■ Unlocked by key from outside or rotating inside knob ■ When outside knob locked by push button from inside, key from outside or rotating inside knob retracts latch, and unlocks outside knob 	F82
Privacy Bedroom/Bathroom	76			<ul style="list-style-type: none"> ■ Latchbolt operated by knob from either side ■ Outside knob locked by push button on inside ■ Unlocked by emergency release on outside, rotating inside knob 	F76
Passage/Hall Closet	75			<ul style="list-style-type: none"> ■ Latchbolt operated by knob from either side at all times 	F75

ACCESSORIES

KT2100 Series Latches

CL100506

Drive-in latch, non-dead latching, used where face plate not required. 1/2" throw. Backset adjustable 2-3/8" to 2-3/4".



CL100505

Drive-in latch, dead latching, used where face plate not required. 1/2" throw. Backset adjustable 2-3/8" to 2-3/4".




CL100504, US32D

UL/ULC listed latch bolt with non-deadlatching function. 1/2" throw. Backset adjustable 2-3/8" to 2-3/4". Fits 160 door prep (2-1/8" hole, 7/8" latch hole) or fits 161 door prep (2-1/8" hole, 1" latch hole).



CL100503, US32D

UL/ULC listed latch bolt with deadlatching function. 1/2" throw. Backset adjustable 2-3/8" to 2-3/4". Fits 160 door prep (2-1/8" hole, 7/8" latch hole) or fits 161 door prep (2-1/8" hole, 1" latch hole).



KT2100 Series Strikes

CL100186 — ASA Strike, US32D

CL100187 — ASA Strike, US3

CL100415 — ASA Strike, US10B

For metal frames. (1-1/4" x 4-7/8" x 3/32").



CL100191 — T Strike, US32D

CL100189 — T Strike, US3

CL100420 — T Strike, US10B

For wood frames. (1-1/8" x 2-3/4" x 3/32").



CL100190 — F Strike, US32D

CL100192 — F Strike, US3

CL100581 — F Strike, US10B

For wood residential applications. (1-5/8" x 2-1/4" x 3/32").



KT2100 Series Non-Restricted Keyway

CL100219 —

Cylinder, Schlage C, US26D

CL100584 —

Cylinder, Schlage C, US4

Standard brass 6-pin cylinder SCC keyway, optional keyways available (see price list).



KT2100 Series Tell Restricted Keyway

TELL CYLINDERS:

CL101503 —


6 pin Tell cylinder, US26D

CL101504 —

6 pin Tell cylinder, US4



How to Order KT2100 Series

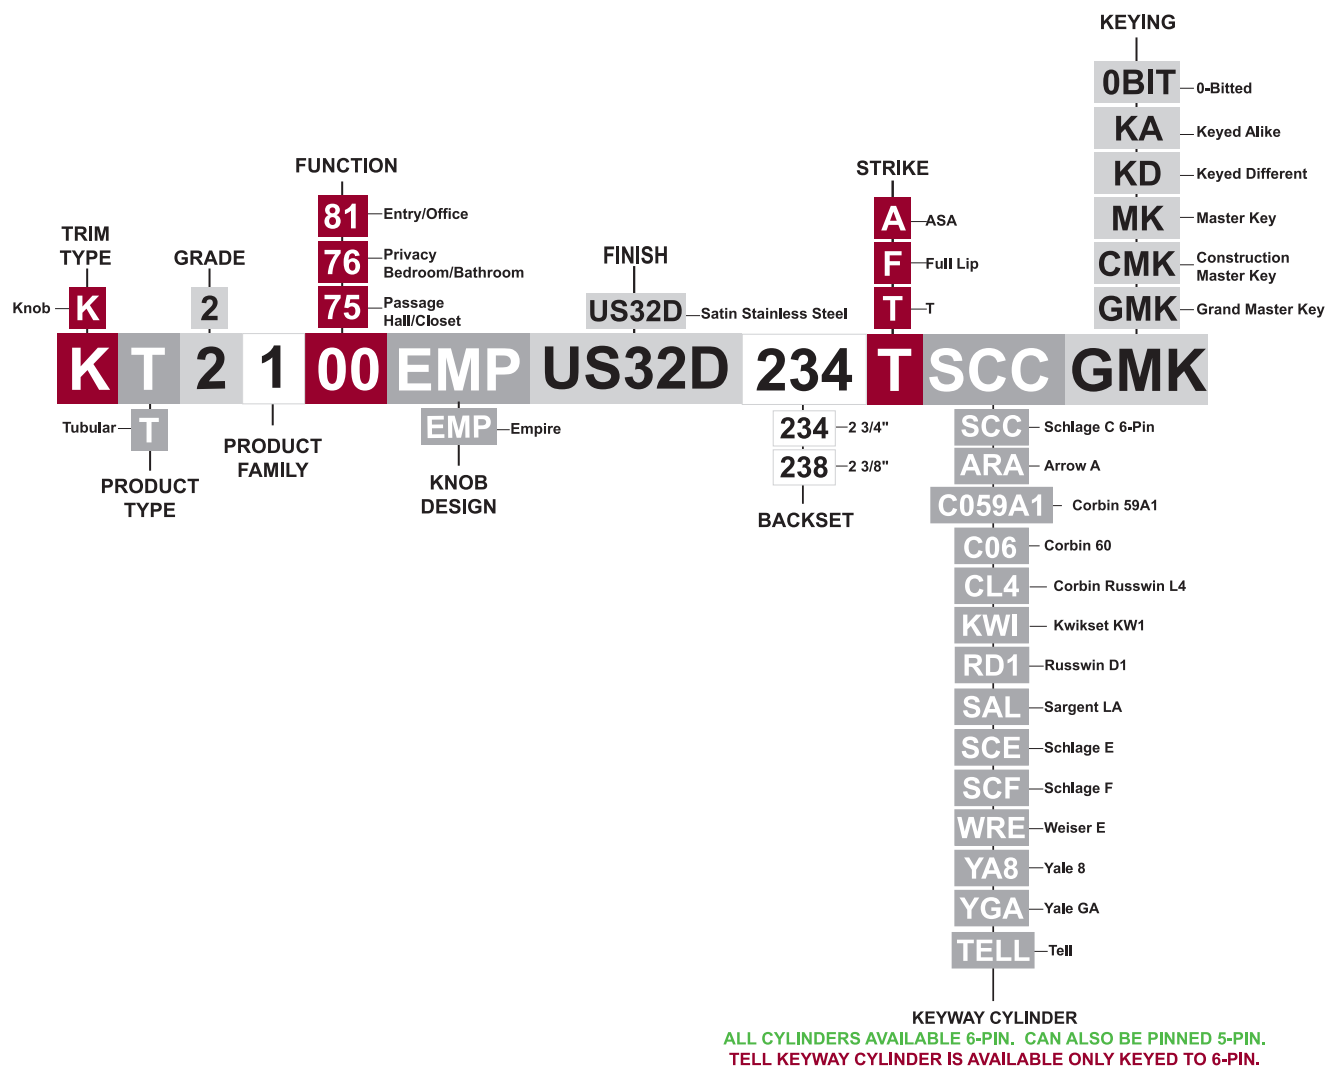

KC2300 SERIES

Heavy-Duty Cylindrical Grade 2 Knobsets



Standard Features

- **Performance** Complies with ANSI A156.2, Series 4000, Grade 2, (400,000 cycles), UL/ULC listed for 3 hour fire door
- **Chassis** Cylindrical, steel - coated with zinc dichromate (corrosion resistance)
- **Latch** 1-1/8" x 2-1/4", square corner faceplate, 1" housing diameter (stainless steel), 1/2" throw
- **Rose** 3" diameter
- **Backset** 2-3/4"
- **Strike** Square corner 1-1/4" x 4-7/8" ANSI **ASA Strike**
- **Standard Cylinder** Standard cylinder Schlage (SCC) - 6-pin solid brass, C keyway, keyed different (KD).
- **Keys** Two nickel silver per lock cylinder
- **Door Range** 1-3/8" to 1-3/4"
- **Door Preparation** 2-1/8" diameter for knob, 1" diameter for latch bolt. Fits standard 161 door prep.
- **Warranty** 1 year limited










Optional Features

- **Backset** 2-3/8"
- **Strike** **T Strike** (1-1/8" x 2-3/4"), and **F Strike** (full lip)

Keying Options

- **Tell Cylinder** Restricted Tell keyway cylinder available, optional. Tell keyway cylinder is available **only** keyed to 6-pin.
- **Other Cylinder Options** Arrow A (ARA), Corbin 59A1 (C059A1), Corbin 60 (C06), Corbin Russwin L4 (CL4), Kwikset (KW1), Russwin D1 (RD1), Sargent LA (SAL), Schlage E (SCE), Schlage F (SCF), Weiser E (WRE), Yale 8 (YA8), Yale GA (YGA)
ALL CYLINDERS 6-PIN. CAN ALSO BE PINNED 5-PIN.
- **Keying Options** Grand master key (GMK), construction master key (CMK), master key (MK), keyed different (KD), keyed alike (KA), 0-bitted (0BIT)

KC2300 Series Function Chart

FUNCTION	FUNCTION NO.	OUTSIDE	INSIDE	FUNCTION DESCRIPTION	ANSI NO.
Entrance	81			<ul style="list-style-type: none"> ■ Latchbolt operated by knob from either side ■ Outside knob locked by push button from inside ■ Unlocked by key from outside or rotating inside knob ■ When outside knob locked by push and turn button from inside, key from outside or rotating inside knob retracts latch, does not unlock outside knob 	F81
Classroom	84			<ul style="list-style-type: none"> ■ Latchbolt operated by knob from each side ■ Outside knob locked or unlocked by key from outside ■ Inside knob always operates latch 	F84
Storeroom	86			<ul style="list-style-type: none"> ■ Latch operated by rotating inside knob or key in outside knob ■ Outside knob always fixed 	F86
Communicating	91			<ul style="list-style-type: none"> ■ Deadlocking latchbolt operated by either knob ■ Key in outside knob; locks / unlocks outside knob ■ Key in inside knob; locks / unlocks inside knob ■ Each knob locks / unlocks independently 	F80
Hotel	93			<ul style="list-style-type: none"> ■ Deadlocking latchbolt ■ Rigid outside, active inside knob ■ Latchbolt retracted by key or rotating inside knob ■ Push button on inside knob projects occupancy indicator on face of cylinder plug, shuts out all keys except emergency or display keys ■ Push button is released by turning inside knob or closing door ■ Inserted emergency or display key rotated left, fixes pushbutton in locked position, shuts out all other keys 	F93
Privacy Bedroom/Bathroom	76			<ul style="list-style-type: none"> ■ Latchbolt operated by knob from either side ■ Outside knob locked by push button on inside ■ Unlocked by emergency release on outside, rotating inside knob, or closing door 	F76
Passage/Closet	75			<ul style="list-style-type: none"> ■ Latchbolt operated by knob from either side at all times 	F75
Exit Latch	80			<ul style="list-style-type: none"> ■ Latchbolt operated by knob from one side at all times 	
Single Dummy	01			<ul style="list-style-type: none"> ■ Pull knob one side ■ No mechanical operation 	

ACCESSORIES

KC2300 Series Latches

CL100193 —
2-3/4" Guarded, US26D

CL100194 —
2-3/4" Unguarded, US26D

CL100195 —
2-3/8" Unguarded, US26D

CL100518 —
2-3/8" Guarded, US26D

Drive-in latch, used where face plate not required available in 2-3/8" and 2-3/4" backset. 1/2" throw, 1" diameter body.



CL100214 —
2-3/4" Unguarded, US32D

CL100216 —
2-3/8" Unguarded, US32D

CL100210 —
2-3/4" Unguarded, US3

CL100211 —
2-3/8" Unguarded, US3

UL/ULC listed latch bolt with non-deadlatching function. 1/2" throw. 2-3/8" and 2-3/4" backset available. Fits 160 door prep (2-1/8" hole, 7/8" latch hole) or fits 161 door prep (2-1/8" hole, 1" latch hole).



CL100213 —
2-3/4" Guarded, US32D

CL100212 —
2-3/8" Guarded, US32D

CL100209 —
2-3/4" Guarded, US3

CL100251 —
2-3/8" Guarded, US3

UL/ULC listed latch bolt with deadlatching function. 1/2" throw. 2-3/8" and 2-3/4" backset available. Fits 160 door prep (2-1/8" hole, 7/8" latch hole) or fits 161 door prep (2-1/8" hole, 1" latch hole).



KC2300 Series Strikes

CL100186 — ASA Strike, US32D

CL100187 — ASA Strike, US3

CL100415 — ASA Strike, US10B

For metal frames. (1-1/4" x 4-7/8" x 3/32").



CL100191 — T Strike, US32D

CL100189 — T Strike, US3

CL100420 — T Strike, US10B

For wood frames. (1-1/8" x 2-3/4" x 3/32").



CL100190 — F Strike, US32D

CL100192 — F Strike, US3

CL100581 — F Strike, US10B

For wood residential applications. (1-5/8" x 2-1/4" x 3/32").



KC2300 Series Non-Restricted Keyway

CL100219 —
Cylinder, Schlage C, US26D

CL100584 —
Cylinder, Schlage C, US4

Standard brass 6-pin cylinder SCC keyway, optional keyways available (see price list).



KC2300 Series Tell Restricted Keyway


TELL CYLINDERS:

CL101503 —
6 pin Tell cylinder, US26D

CL101504 —
6 pin Tell cylinder, US4



How to Order KC2300 Series

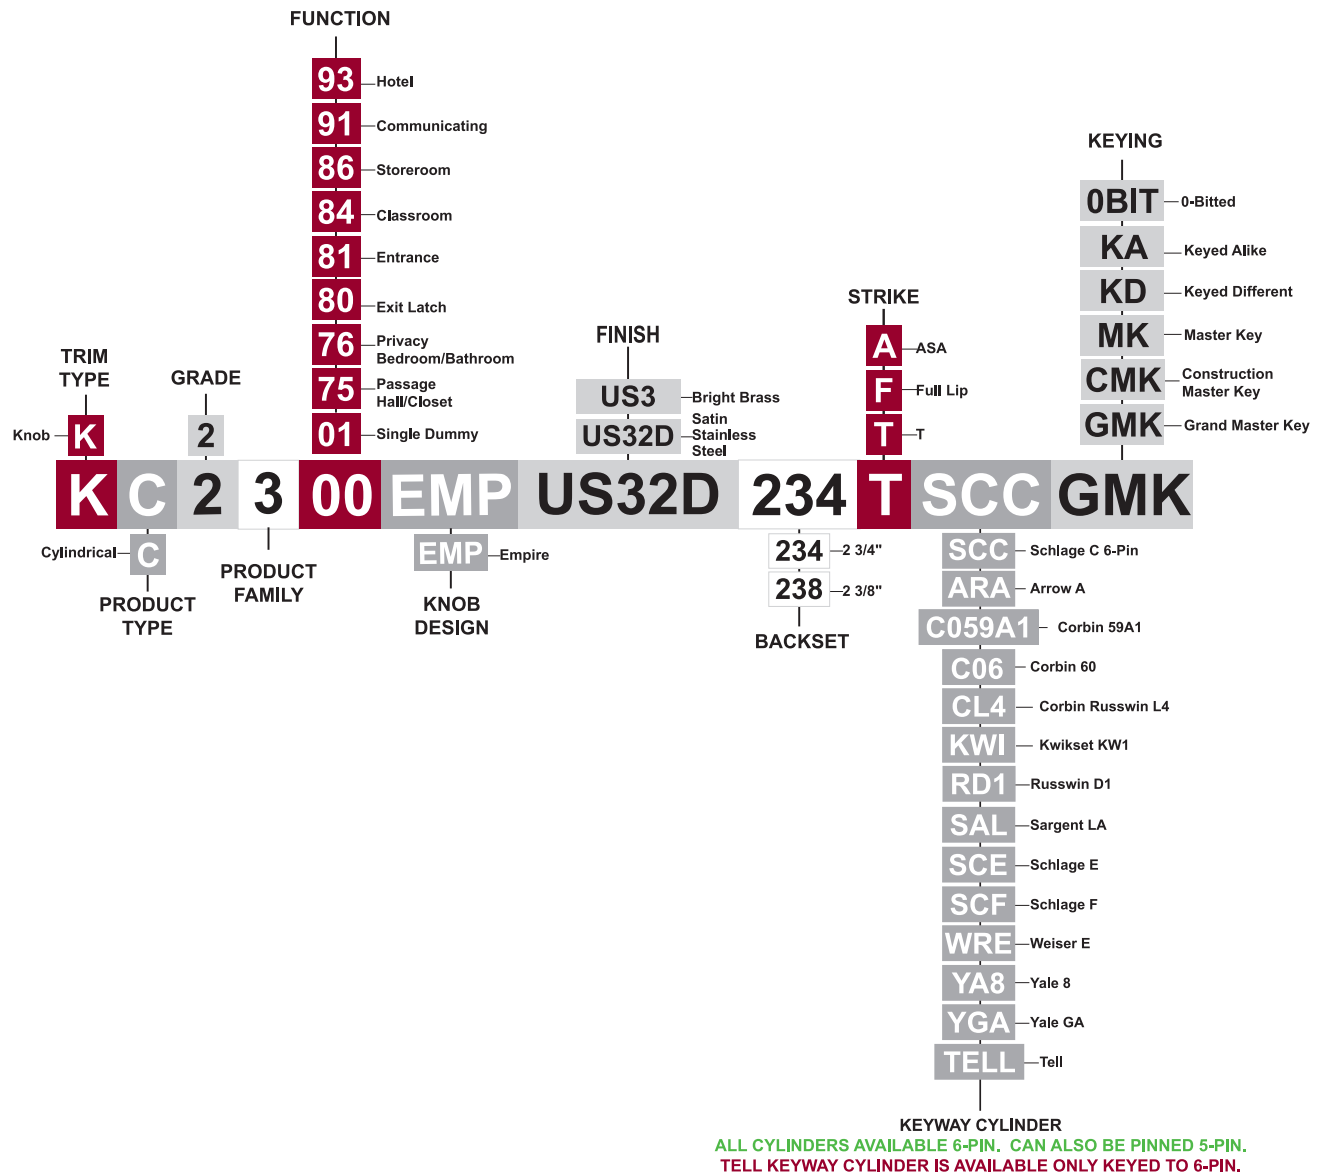

LC2400 SERIES

Heavy-Duty Cylindrical Grade 2 Leversets



Cortland (CTL)



Buckingham (BUC)

Standard Features

- **Performance** Complies with ANSI A156.2, Series 4000, Grade 2, (400,000 cycles), UL/ULC listed for 3 hour fire door ANSI A117.1 American Disabilities Act (ADA)
- **Chassis** Cylindrical, steel - coated with zinc dichromate (corrosion resistance), freewheeling clutch (added security from hammer attacks), independent spring cages
- **Lever** Non-handed, solid cast
- **Latch** 1-1/8" x 2-1/4", square corner faceplate, 1" housing diameter (stainless steel), 1/2" throw
- **Rose** 3-1/2" diameter
- **Thru-bolts** Thru-bolts standard. Removable available.
- **Backset** 2-3/4"
- **Strike** Square corner 1-1/4" x 4-7/8" ANSI **ASA Strike**
- **Standard Cylinder** Standard cylinder Schlage (SCC) - 6-pin solid brass, C keyway, keyed different (KD).
- **Keys** Two nickel silver per lock cylinder
- **Cylinder** Other manufacturers including small format interchangeable cores
- **Door Range** 1-3/8" - 2"
- **Door Preparation** 2-1/8" diameter for lever, 1" diameter for latchbolt. Fits standard 161 door prep with through-bolting through the door.
1 year limited

Warranty

Optional Features

- **Strike** **T Strike** (1-1/8" x 2-3/4"), and **F Strike** (full lip)
- **Backset** 2-3/8"

Keying Options

- **Tell Cylinder** Restricted Tell keyway cylinder can key both the cylinder and interchangeable core in one lock. The cylinders and IC cores are interchangeable. Tell keyway cylinder is available **only** keyed to 6-pin. Tell IC cylinder can be keyed to 6-pin or 7-pin interchangeable core (IC).
- **Other Cylinder Options** Arrow A (ARA), Corbin 59A1 (C059A1), Corbin 60 (C06), Corbin Russwin L4 (CL4), Kwikset (KW1), Russwin D1 (RD1), Sargent LA (SAL), Schlage E (SCE), Schlage F (SCF), Weiser E (WRE), Yale 8 (YA8), Yale GA (YGA)
ALL CYLINDERS 6-PIN. CAN ALSO BE PINNED 5-PIN.
- **IC Keyway Cylinder** Tell, Best A (BA), Best B (BB), Best C (BC), Best D (BD), Best E (BE), Best F (BF), Best G (BG), Best H (BH), Best J (BJ), Best K (BK), Best L (BL), Best M (BM), Best Q (BQ), Best U (BU), Black construction core (BLK), Less core (00), Not specified (XX)
AVAILABLE 6- OR 7-PIN
- **Keying Options** Grand master key (GMK), construction master key (CMK), master key (MK), keyed different (KD), keyed alike (KA), interchangeable core uncombined (IC), 0-bitted (0BIT)

LC2400 Series

Function Chart



FUNCTION	FUNCTION NO.	OUTSIDE	INSIDE	FUNCTION DESCRIPTION	ANSI NO.
Entrance	81			<ul style="list-style-type: none"> Latchbolt operated by lever from either side Outside lever locked by push button from inside Unlocked by key from outside or rotating inside lever When outside lever locked by push and turn button from inside, key from outside or rotating inside lever retracts latch, does not unlock outside lever 	F81
Office	82			<ul style="list-style-type: none"> Deadlocking latch bolt operated by lever from either side except when outside lever is locked by push button or other locking device on inside. When outside lever is locked, operating key in outside lever or operating inside lever unlocks push button or other locking device and retracts latch bolt. Closing door does not release push button or other locking device. 	
Classroom	84			<ul style="list-style-type: none"> Latchbolt operated by lever from each side Outside lever locked or unlocked by key from outside Inside lever always operates latch 	F84
Storeroom	86			<ul style="list-style-type: none"> Latch operated by rotating inside lever or key in outside lever Outside lever always fixed 	F86
Double Cylinder Storeroom	91			<ul style="list-style-type: none"> Deadlocking latchbolt operated by either lever Key in either lever locks or unlocks both levers 	F80
Intruder	110			<ul style="list-style-type: none"> For classroom doors Deadlatching latchbolt Either lever operates latchbolt (except when outside lever is locked by key from either side) Outside lever remains locked upon egress Inside lever always active 	F110
Privacy Bedroom/Bathroom	76			<ul style="list-style-type: none"> Latchbolt operated by lever from either side Outside lever locked by push button on inside Unlocked by emergency release on outside, rotating inside lever, or closing door 	F76
Passage Hall/Closet	75			<ul style="list-style-type: none"> Latchbolt operated by lever from either side at all times 	F75
Exit Latch	80			<ul style="list-style-type: none"> Latchbolt operated by lever from one side at all times 	
Single Dummy	01			<ul style="list-style-type: none"> Pull lever one side No mechanical operation 	

ACCESSORIES

LC2400 Series Latches



CL100193 —
2-3/4" Guarded, US26D

CL100194 —
2-3/4" Unguarded, US26D

CL100195 —
2-3/8" Unguarded, US26D

CL100518 —
2-3/8" Guarded, US26D

Drive-in latch, used where face plate not required available in 2-3/8" and 2-3/4" backset. 1/2" throw, 1" diameter body.



CL100214 —
2-3/4" Unguarded, US32D

CL100216 —
2-3/8" Unguarded, US32D

CL100210 —
2-3/4" Unguarded, US3

CL100211 —
2-3/8" Unguarded, US3

UL/ULC listed latch bolt with non-deadlatching function. 1/2" throw. 2-3/8" and 2-3/4" backset available. Fits 160 door prep (2-1/8" hole, 7/8" latch hole) or fits 161 door prep (2-1/8" hole, 1" latch hole).



CL100213 —
2-3/4" Guarded, US32D

CL100212 —
2-3/8" Guarded, US32D

CL100209 —
2-3/4" Guarded, US3

CL100251 —
2-3/8" Guarded, US3

UL/ULC listed latch bolt with deadlatching function. 1/2" throw. 2-3/8" and 2-3/4" backset available. Fits 160 door prep (2-1/8" hole, 7/8" latch hole) or fits 161 door prep (2-1/8" hole, 1" latch hole).



LC2400 Series Strikes

CL100186 — ASA Strike, US32D

CL100187 — ASA Strike, US3

CL100415 — ASA Strike, US10B

For metal frames. (1-1/4" x 4-7/8" x 3/32").



CL100191 — T Strike, US32D

CL100189 — T Strike, US3

CL100420 — T Strike, US10B

For wood frames. (1-1/8" x 2-3/4" x 3/32").



CL100190 — F Strike, US32D

CL100192 — F Strike, US3

CL100581 — F Strike, US10B

For wood residential applications. (1-5/8" x 2-1/4" x 3/32").



LC2400 Series Non-Restricted Keyway

CL100219 —
Cylinder, Schlage C, US26D

CL100584 —
Cylinder, Schlage C, US4

Standard brass 6-pin cylinder SCC keyway, optional keyways available (see price list).



CL100268 —
IC Core Best A 6 Pin, US26D

CL100270 —
IC Core Best A 7 Pin, US26D

CL100269 —
IC Core Best A 6 Pin, US4

CL100271 —
IC Core Best A 7 Pin, US4

Small format interchangeable core brass cylinder 6-pin standard, 7-pin available. Best "A" keyway standard.



LC2400 Series Tell Restricted Keyway

TELL CYLINDERS:

CL101503 —
6 pin Tell cylinder, US26D

CL101504 —
6 pin Tell cylinder, US4



TELL INTERCHANGEABLE CORES:

CL101499 — 6 pin Tell IC core, US26D

CL101500 — 6 pin Tell IC core, US4

CL101501 — 7 pin Tell IC core, US26D

CL101502 — 7 pin Tell IC core, US4



FINISHES: US32D=Satin Stainless Steel, US3=Bright Brass, US26D=Satin Chrome, US4=Satin Brass, US10B=Oil Rubbed Bronze

How to Order LC2400 Series

FUNCTION

110—Intruder
91—Double Cylinder Storeroom
86—Storeroom
86—Storeroom IC**
84—Classroom
84—Classroom IC**
82—Office
81—Entrance
81—Entrance IC**
80—Exit Latch
76—Privacy Bedroom/Bathroom Passage Hall/Closet
75—Single Dummy
01—Single Dummy

TRIM TYPE
L—Lever

GRADE
2

PRODUCT TYPE
C—Cylindrical

PRODUCT FAMILY
4

THRU-BOLT
R—Removeable Thru-Bolt (Optional)

LEVER DESIGN
BUC—Buckingham
CTL—Cortland

BACKSET
238—2 3/8"
234—2 3/4"

FINISH
US26D—Satin Chrome
US3—Bright Brass
US10B—Oil Rubbed Bronze

STRIKE
T—T
F—Full Lip
A—ASA

IC KEYWAY CYLINDER*
AVAILABLE 6- or 7-PIN

TELL—Tell
XX—Not Specified
00—Less Core
BLK—Black Construction Core
BU—Best U
BQ—Best Q
BM—Best M
BL—Best L
BK—Best K
BJ—Best J
BH—Best H
BG—Best G
BF—Best F
BE—Best E
BD—Best D
BC—Best C
BB—Best B
BA—Best A

KEYING
0BIT—0-Bitted
IC—Interchangeable Core Uncombined
KA—Keyed Alike
KD—Keyed Different
MK—Master Key
CMK—Construction Master Key
GMK—Grand Master Key

NON-IC KEYWAY CYLINDER*
ALL CYLINDERS AVAILABLE 6-PIN. CAN ALSO BE PINNED 5-PIN.
TELL KEYWAY CYLINDER IS AVAILABLE ONLY KEYED TO 6-PIN.


SCC*—Schlage C 6-Pin
ARA—Arrow A
C059A1—Corbin 59A1
C06—Corbin 60
CL4—Corbin Russwin L4
KWI—Kwikset KW1
RD1—Russwin D1
SAL—Sargent LA
SCE—Schlage E
SCF—Schlage F
WRE—Weiser E
YA8—Yale 8
YGA—Yale GA
TELL—Tell

Order Code Example: L C 2 4 00 R CTL US26D 234 T BA* SCC* GMK

* Choose one keyway format; either IC KEYWAY CYLINDER or Non-IC KEYWAY CYLINDER
** IC functions in Satin Chrome (26D) only

LC2600 SERIES

Standard-Duty Cylindrical Grade 2 Leversets

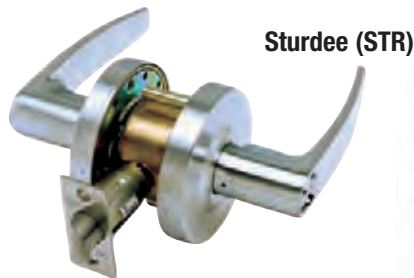

Standard Features

- **Performance** Complies with ANSI A156.2, Series 4000, Grade 2, 400,000 cycles, ANSI A117.1 accessibility (ADA) code, UL/ULC listed for 3 hour fire door
- **Chassis** Cylindrical, steel-coated w/ zinc dichronate (corrosion resistance)
- **Lever** Non-handed
- **Latch** 1-1/8" x 2-1/4" square corner faceplate, 3/4" housing, 1/2" throw (stainless steel)
- **Rose** 3-1/4" diameter
- **Thru-bolts** Removable thru-bolts standard
- **Backset** 2-3/8" or 2-3/4"
- **Strike** Square corner 1-1/4" x 4-7/8" ANSI ASA Strike
- **Standard Cylinder** Standard cylinder Schlage (SCC) - 6-pin solid brass, C keyway, keyed different (KD).
- **Keys** Two nickel silver per lock
- **Door Range** 1-3/8" to 2"
- **Door Preparation** 2-1/8" diameter for bore, 1" diameter latch bore. Fits standard 161 door prep.
- **Warranty** 1 year limited

















Optional Features

- **Chassis** Freewheeling clutch, optional for **Cortland** and **Sturdee** only.
- **Strike** **T Strike** (1-1/8" x 2-3/4"), and **F Strike** (full lip)

Keying Options

- **Tell Cylinder** Restricted Tell keyway cylinder can key both the cylinder and interchangeable core in one lock. The cylinders and IC cores are interchangeable. Tell keyway cylinder is available **only** keyed to 6-pin. Tell IC cylinder can be keyed to 6-pin or 7-pin interchangeable core (IC).
- **Other Cylinder Options** Arrow A (ARA), Corbin 59A1 (C059A1), Corbin 60 (C06), Corbin Russwin L4 (CL4), Kwikset (KW1), Russwin D1 (RD1), Sargent LA (SAL), Schlage E (SCE), Schlage F (SCF), Weiser E (WRE), Yale 8 (YA8), Yale GA (YGA)
ALL CYLINDERS 6-PIN. CAN ALSO BE PINNED 5-PIN.
- **IC Keyway Cylinder** Tell, Best A (BA), Best B (BB), Best C (BC), Best D (BD), Best E (BE), Best F (BF), Best G (BG), Best H (BH), Best J (BJ), Best K (BK), Best L (BL), Best M (BM), Best Q (BQ), Best U (BU), Black construction core (BLK), Less core (00), Not specified (XX)
AVAILABLE 6- OR 7-PIN
- **Keying Options** Grand master key (GMK), construction master key (CMK), master key (MK), keyed different (KD), keyed alike (KA), interchangeable core uncombined (IC), 0-bitted (0BIT)

LC2600 Series Function Chart

FUNCTION	FUNCTION NO.	OUTSIDE	INSIDE	FUNCTION DESCRIPTION	ANSI NO.
Entry/Office	81			<ul style="list-style-type: none"> ■ Latchbolt operated by lever from either side ■ Outside lever locked by turn button from inside ■ Unlocked by key from outside or rotating inside lever 	F82
Entry	82			<ul style="list-style-type: none"> ■ Latchbolt operated by lever from either side ■ Outside lever locked by push button from inside ■ Outside unlocked by key from outside or rotating inside lever 	F82
Classroom	84			<ul style="list-style-type: none"> ■ Latchbolt operated by lever from each side ■ Outside lever locked or unlocked by key from outside ■ Inside lever always operates latch 	F84
Storeroom	86			<ul style="list-style-type: none"> ■ Latch operated by rotating inside lever or key in outside lever ■ Outside lever always fixed 	F86
Communicating	91			<ul style="list-style-type: none"> ■ Deadlocking latchbolt operated by either lever ■ Key in outside lever; locks / unlocks outside lever ■ Key in inside lever; locks / unlocks inside lever ■ Each lever locks / unlocks independently 	F80
Privacy Bedroom/Bathroom	76			<ul style="list-style-type: none"> ■ Latchbolt operated by lever from either side ■ Outside lever locked by push button on inside ■ Unlocked by emergency release on outside, rotating inside lever, or closing door 	F76
Passage/Closet	75			<ul style="list-style-type: none"> ■ Latchbolt operated by lever from either side at all times 	F75
Single Dummy	01			<ul style="list-style-type: none"> ■ Pull lever one side ■ No mechanical operation 	

ACCESSORIES

LC2600 Series Strikes

CL100186 — ASA Strike, US32D

CL100187 — ASA Strike, US3

CL100415 — ASA Strike, US10B

For metal frames. (1-1/4" x 4-7/8" x 3/32").

CL100191 — T Strike, US32D

CL100189 — T Strike, US3

CL100420 — T Strike, US10B

For wood frames. (1-1/8" x 2-3/4" x 3/32").

CL100190 — F Strike, US32D

CL100192 — F Strike, US3

CL100581 — F Strike, US10B

For wood residential applications.
(1-5/8" x 2-1/4" x 3/32").



LC2600 Series Non-Restricted Keyway

CL100219 —
Cylinder, Schlage C, US26D

CL100584 —
Cylinder, Schlage C, US4

Standard brass 6-pin cylinder
SCC keyway, optional keyways
available (see price list).



LC2600 Series Tell Restricted Keyway


TELL CYLINDERS:

CL101503 —
6 pin Tell cylinder, US26D

CL101504 —
6 pin Tell cylinder, US4



How to Order LC2600 Series

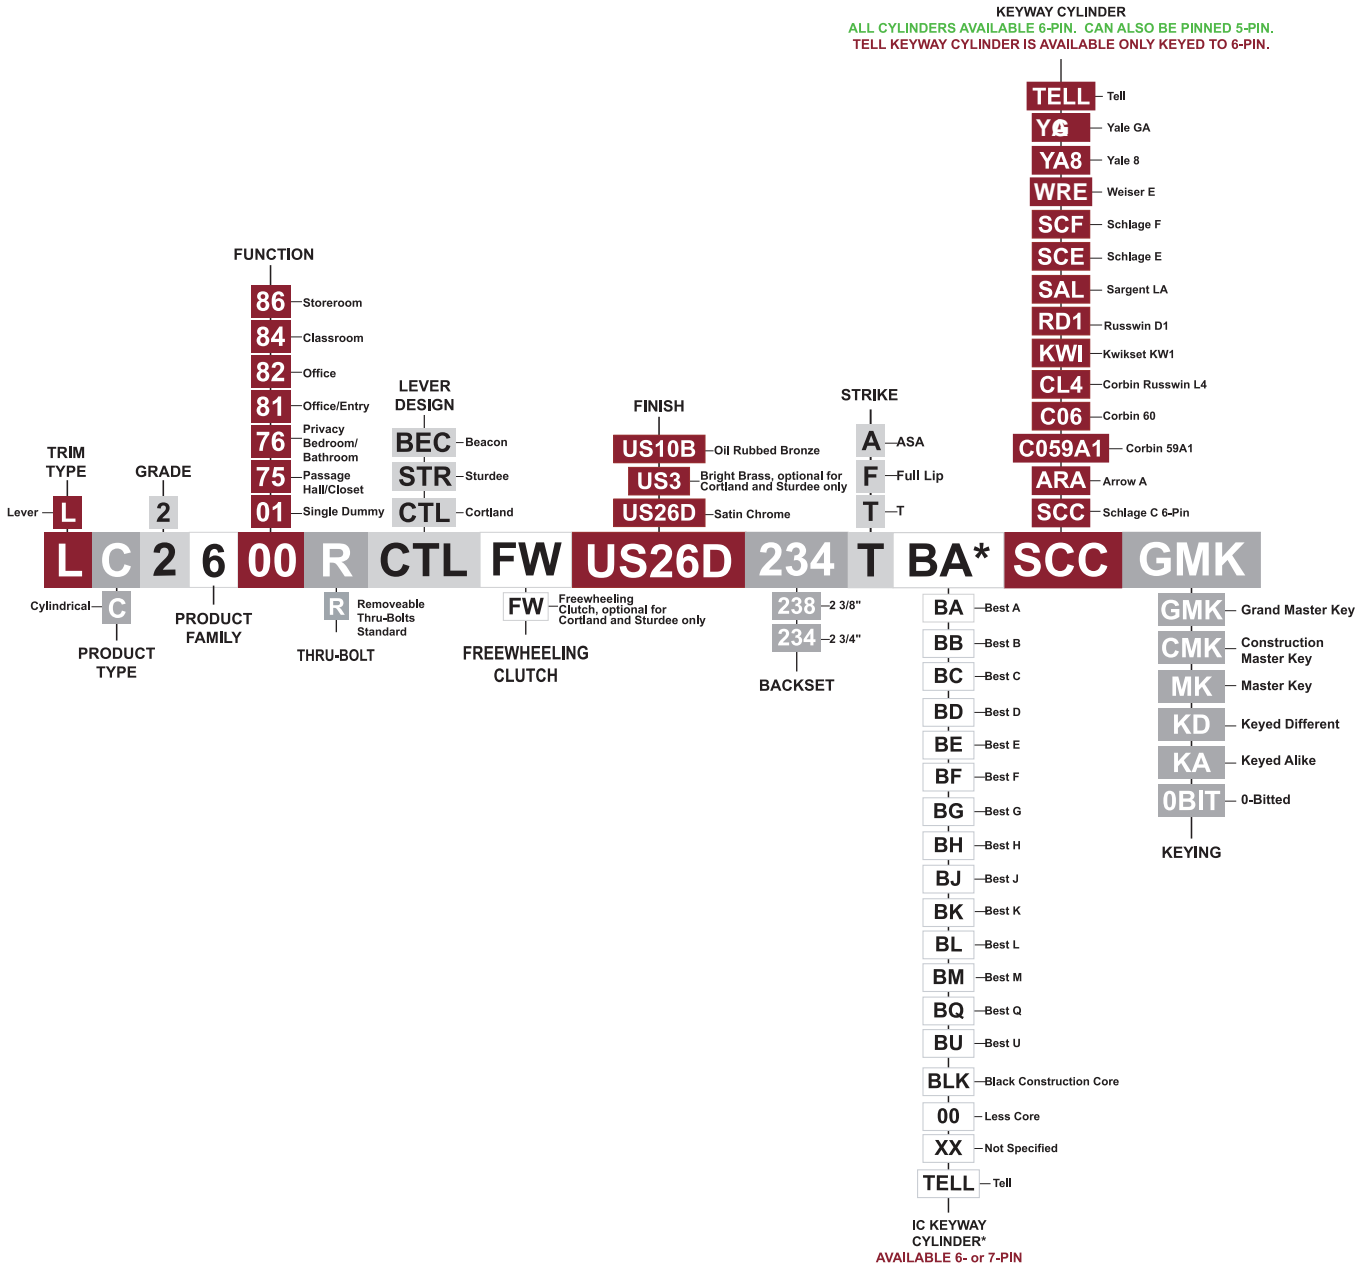

LC2700 SERIES

Standard-Duty Cylindrical Grade 2 Interconnected Leversets



Standard Features

- **Performance** Complies with ANSI A156.2, Series 4000, Grade 2, (400,000 cycles), UL/ULC listed for 3 hour fire door ADA code compliant
- **Chassis** Cylindrical, steel - coated with zinc dichromate (corrosion resistance)
- **Lever** Non-handed
- **Latch** 1-1/8" x 2-1/4", square corner faceplate, 3/4" housing diameter, 1/2" throw (stainless steel)
- **Backset** 2-3/4"
- **Strike** 2-3/4" x 1-1/8" standard T-strike. Optional strikes available.
- **Standard Cylinder** Standard cylinder Schlage (SCC) - 6-pin solid brass, C keyway, keyed different (KD).
- **Keys** Two nickel silver per lock
- **Door Range** 1-3/8" to 1-3/4" door thickness
- **Door Preparation** 2-1/8" diameter for bore, 1" diameter for latch bore. Fits standard 161 door prep, 4" centers.
- **Warranty** 1 year limited

Keying Options

- **Tell Cylinder** Restricted Tell keyway cylinder available, optional. Tell keyway cylinder is available **only** keyed to 6-pin.
- **Other Cylinder Options** Arrow A (ARA), Corbin 59A1 (C059A1), Corbin 60 (C06), Corbin Russwin L4 (CL4), Kwikset (KW1), Russwin D1 (RD1), Sargent LA (SAL), Schlage E (SCE), Schlage F (SCF), Weiser E (WRE), Yale 8 (YA8), Yale GA (YGA)
ALL CYLINDERS 6-PIN. CAN ALSO BE PINNED 5-PIN.
- **Keying Options** Grand master key (GMK), construction master key (CMK), master key (MK), keyed different (KD), keyed alike (KA), 0-bitted (0BIT)

ACCESSORIES

LC2700 Series Non-Restricted Keyway

CL100219 —

Cylinder, Schlage C, US26D

CL100584 —

Cylinder, Schlage C, US4

Standard brass 6-pin cylinder
SCC keyway, optional keyways
available (see price list).



LC2700 Series Tell Restricted Keyway

TELL CYLINDERS:

CL101503 —


6 pin Tell cylinder, US26D

CL101504 —

6 pin Tell cylinder, US4




LC2700 Series Function Chart

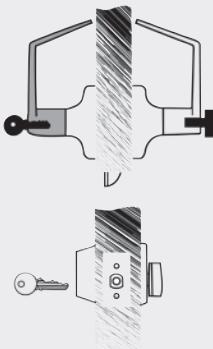FUNCTION	FUNCTION NO.	OUTSIDE	INSIDE	FUNCTION DESCRIPTION	ANSI NO.
Entry	95			<ul style="list-style-type: none"> ■ Latchbolt operated by lever from either side ■ Rotating turn from inside or key from outside extends deadbolt to locked position ■ Both deadbolt and latch bolt are retracted to unlocked position by operating inside lever 	F95

How to Order LC2700 Series

TELL PART NUMBER: CL100850

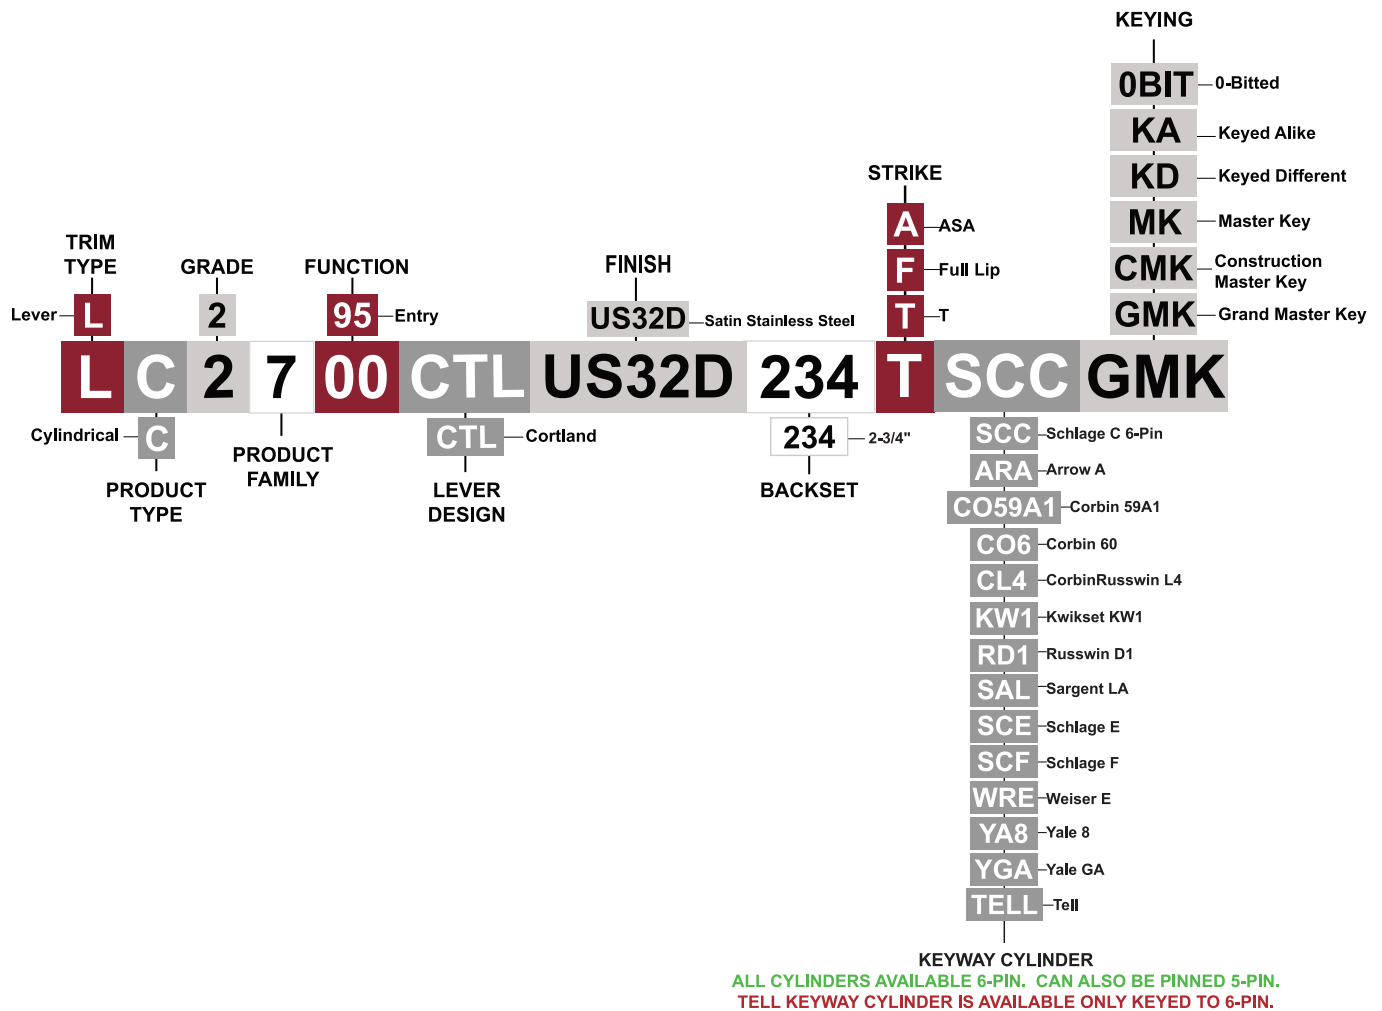

Grade Three
White Tab

Grade Three
White Tab back

KC3600 SERIES

Grade 3 Cylindrical Knobsets



Standard Features:

- **Function** Entrance
- **Performance** Complies with ANSI A156.2 series 4000, Grade 3
- **Chassis** Lock chassis steel, zinc dichromated for corrosion resistance.
Cylindrical type construction, 200,000 cycles
- **Latchbolt** Latchbolt stainless steel with 1/2" throw deadlocking for lock functions.
- **Rose** 2-1/2" diameter
- **Backset** Latch backset adjustable 2-3/8" to 2-3/4"
- **Strike** **Strike Options:** **ASA Strike** (square corner 1-1/4" x 4-7/8" ANSI),
T Strike (square corner 1-1/8" x 2-3/4"), and **F Strike** (full lip)
- **Door Range** Door thickness 1-3/8" to 1-3/4". Non-handed.
- **Door Preparation** Fits standard 160/161 door prep
- **Cylinder** Schlage (SCC) - 5-pin solid brass, C keyway, keyed different (KD)
- **Keys** Keys include two nickel silver per lock cylinder
- **Warranty** 1 year limited

Optional Features:

- **Keying** Grand master key (GMK), construction master key (CMK), master key (MK), keyed different (KD), keyed alike (KA), 0-bitted (0BIT)

LC3600 SERIES

Grade 3 Cylindrical Leversets




Standard Features:

- **Functions** Passage, privacy, dummy functions available lever x lever. **Entry function available ball x lever.** (Lever x lever entry available in commercial Grade 2.)
- **Performance** Complies with ANSI A156.2 series 4000, Grade 3. Passage and privacy functions meet ANSI A117.1 accessibility (ADA) code; entry function does not.
- **Chassis** Lock chassis steel, zinc dichromated for corrosion resistance. Cylindrical type construction, 200,000 cycles
- **Latchbolt** Latchbolt stainless steel with 1/2" throw, deadlocking for lock functions
- **Rose** 2-1/2" diameter
- **Backset** Latch backset adjustable 2-3/8" to 2-3/4"
- **Strike** **Strike Options: ASA Strike** (square corner 1-1/4" x 4-7/8" ANSI), **T Strike** (square corner 1-1/8" x 2-3/4"), and **F Strike** (full lip)
- **Door Range** Door thickness 1-3/8" to 1-3/4". Non-handed.
- **Door Preparation** Fits standard 160/161 door prep.
- **Keys** Keys include two nickel silver per lock cylinder
- **Cylinder** Schlage (SCC) - 5-pin solid brass, C keyway, keyed different (KD)
- **Warranty** 1 year limited




Optional Features:

- **Keying** Grand master key (GMK), construction master key (CMK), master key (MK), keyed different (KD), keyed alike (KA), 0-bitted (0BIT)

KC3600 Series Function Chart

FUNCTION	FUNCTION NO.	OUTSIDE	INSIDE	FUNCTION DESCRIPTION	ANSI NO.
Entrance	81			<ul style="list-style-type: none"> ■ Latchbolt operated by knob from either side ■ Outside knob locked by push button from inside ■ Unlocked by key from outside or rotating inside knob ■ When outside knob locked by push and turn button from inside, key from outside or rotating inside knob retracts latch, does not unlock outside knob 	F81

LC3600 Series Function Chart

FUNCTION	FUNCTION NO.	OUTSIDE	INSIDE	FUNCTION DESCRIPTION	ANSI NO.
Entrance, Lever X Knob	81			<ul style="list-style-type: none"> ■ Latchbolt operated by outside knob/inside lever from either side ■ Outside knob locked by push button from inside lever ■ Outside unlocked by key from outside knob or rotating inside lever 	F82
Passage Hall/Closet	75			<ul style="list-style-type: none"> ■ Latchbolt operated by lever from either side at all times 	F75
Privacy Bedroom/Bathroom	76			<ul style="list-style-type: none"> ■ Latchbolt operated by lever from either side ■ Outside lever locked by push button on inside ■ Unlocked by emergency release on outside, rotating inside lever, or closing door 	F76

ACCESSORIES

KC3600 / LC3600 Series Latches

RL100052 —

2-3/4" / 2-3/8" UNG ADJ DI latch

RL100053 —

2-3/4" / 2-3/8" UNG ADJ Kickoff
(for Privacy) DI

RL100051 —

2-3/4" / 2-3/8" UNG ADJ DI latch

Drive-in latch, used where face plate not required. Backset adjustable 2-3/8" to 2-3/4", 1/2" throw, 1" diameter body.



RL100032—

2-3/4" / 2-3/8" Unguarded, US32D

RL100255—

2-3/4" / 2-3/8" Unguarded, US3

UL listed latch bolt with non-deadlatching function. 1/2" throw. Backset adjustable 2-3/8" to 2-3/4".



RL100258—

2-3/4" / 2-3/8" Guarded, US32D

RL100135—

2-3/4" / 2-3/8" Guarded, US3

UL listed latchbolt with deadlatching function. 1/2" throw. Backset adjustable 2-3/8" and 2-3/4".



KC3600 / LC3600 Series Strikes

CL100186 — ASA Strike, US32D

CL100187 — ASA Strike, US3

CL100415 — ASA Strike, US10B

For metal frames. (1-1/4" x 4-7/8" x 3/32").



CL100191 — T Strike, US32D

CL100189 — T Strike, US3

CL100420 — T Strike, US10B

For wood frames. (1-1/8" x 2-3/4" x 3/32").



CL100190 — F Strike, US32D

CL100192 — F Strike, US3

CL100581 — F Strike, US10B


For wood residential applications. (1-5/8" x 2-1/4" x 3/32").




FINISHES: US32D=Satin Stainless Steel, US3=Bright Brass, US26D=Satin Chrome, US4=Satin Brass, US10B=Oil Rubbed Bronze

NOTES: ADJ=Adjustable, UNG=Unguarded, DI=Drive-In Latch, KO=Kickoff

How To Order KC3600 Series

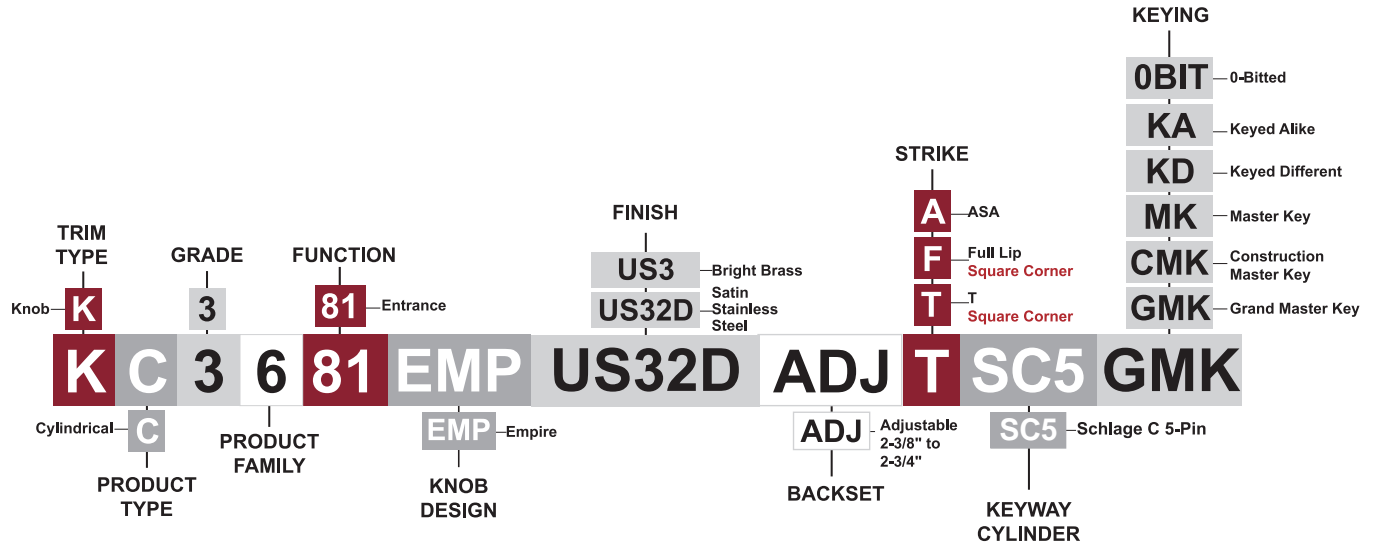

How To Order LC3600 Series

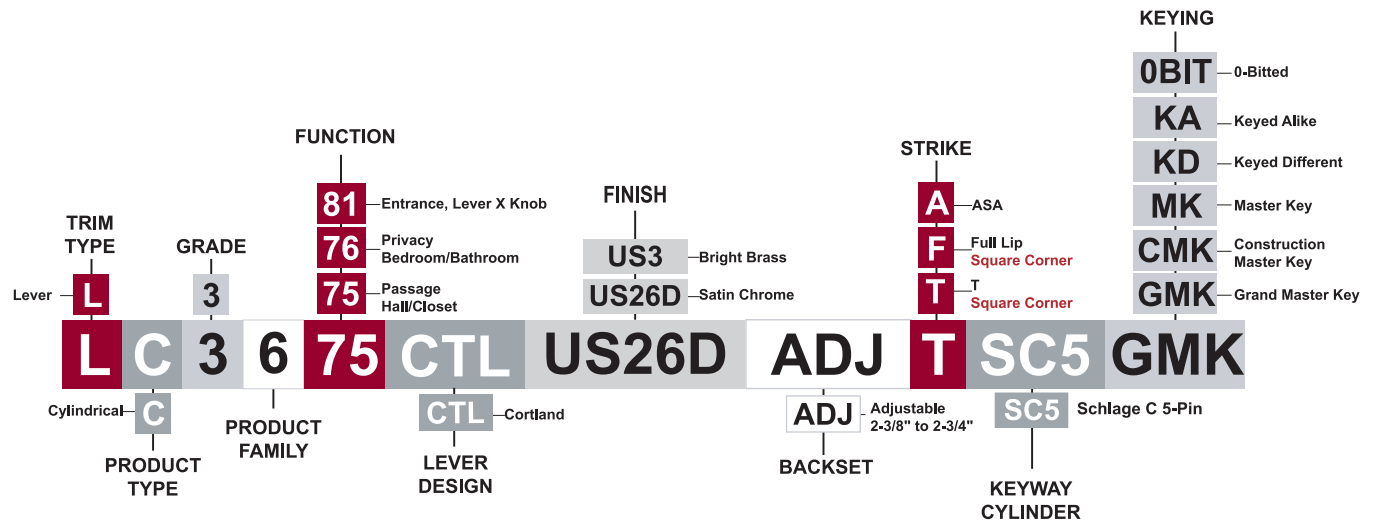




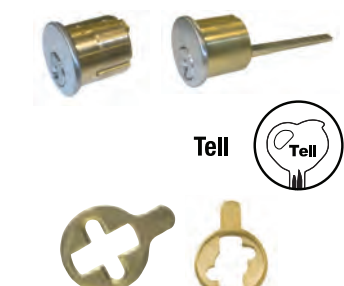
Deadbolts, Cylinders and Storefront
White Tab

Deadbolts, Cylinders and Storefront
White Tab back

COMMERCIAL DOORS & HARDWARE

table of contents

DEADBOLTS, STOREFRONT MORTISE LOCKS, CYLINDERS, KEYING & CAMS

	PAGE
	DEADBOLTS DB1000 Series 41 DB2000/DB2400 Series 43 Indicator Deadbolt 45
	STOREFRONT MORTISE LOCKS Storefront Deadbolt & Hook Bolt Mortise Lock 46 Storefront Deadlatch Mortise Lock 48 Storefront Cylinders, Turns & Levers 50
	Storefront Paddle Latches, Pull Handles & Combo Push/Pull 52
	CYLINDERS Mortise & Rim Cylinders 54 Keying / Tell Restricted Keyway Cylinder 55 Standard & IC Core Cams 56

DB1000 SERIES

Heavy-Duty Tubular Grade 1 Deadbolts





Standard Features

- **Performance** Complies with ANSI A156.5, Grade 1, 250,000 cycles
- **Chassis** Tubular, steel
- **Deadbolt** 1" x 2-1/4", square corner faceplate, 1" housing diameter (stainless steel), 1" throw, roller bar (added security for hacksaw or reciprocating blade cutting)
- **Backset** 2-3/4" (standard)
- **Strike** 1-1/8" x 2-3/4", square corner faceplate
- **Door Range** 1-3/8" to 2"
- **Door Preparation** 2-1/8" diameter for bore, 1" diameter for bolt. Fits standard 161 door prep.
- **Cylinder** Schlage (SCC) - 6-pin solid brass, C keyway, keyed different (KD)
- **Other Cylinder Options** Arrow A (ARA), Corbin 59A1 (C059A1), Corbin 60 (C06), Corbin Russwin L4 (CL4), Kwikset (KW1), Russwin D1 (RD1), Sargent LA (SAL), Schlage E (SCE), Schlage F (SCF), Weiser E (WRE), Yale 8 (YA8), Yale GA (YGA)
- **Keys** Two nickel silver per lock cylinder
- **IC Keyway Cylinder** Best A (BA), Best B (BB), Best C (BC), Best D (BD), Best E (BE), Best F (BF), Best G (BG), Best H (BH), Best J (BJ), Best K (BK), Best L (BL), Best M (BM), Best Q (BQ), Best U (BU), Black construction core (BLK), Less core (00), Not specified (XX)
- **Warranty** 5 year limited


Optional Features

- **Cylinder** Other manufacturers including small format interchangeable cores
- **Keying** Grand master key (GMK), construction master key (CMK), master key (MK), keyed different (KD), keyed alike (KA), interchangeable core uncombined (IC), 0-bitted (0BIT)

DB1000 Series Function Chart

FUNCTION	FUNCTION NO.	OUTSIDE	INSIDE	FUNCTION DESCRIPTION	ANSI NO.
Double Cylinder	41			■ Deadbolt operated by key outside, key inside	E0141
Single Cylinder	51			■ Deadbolt operated by key outside, thumb turn inside	E0151

How to Order DB1000 Series

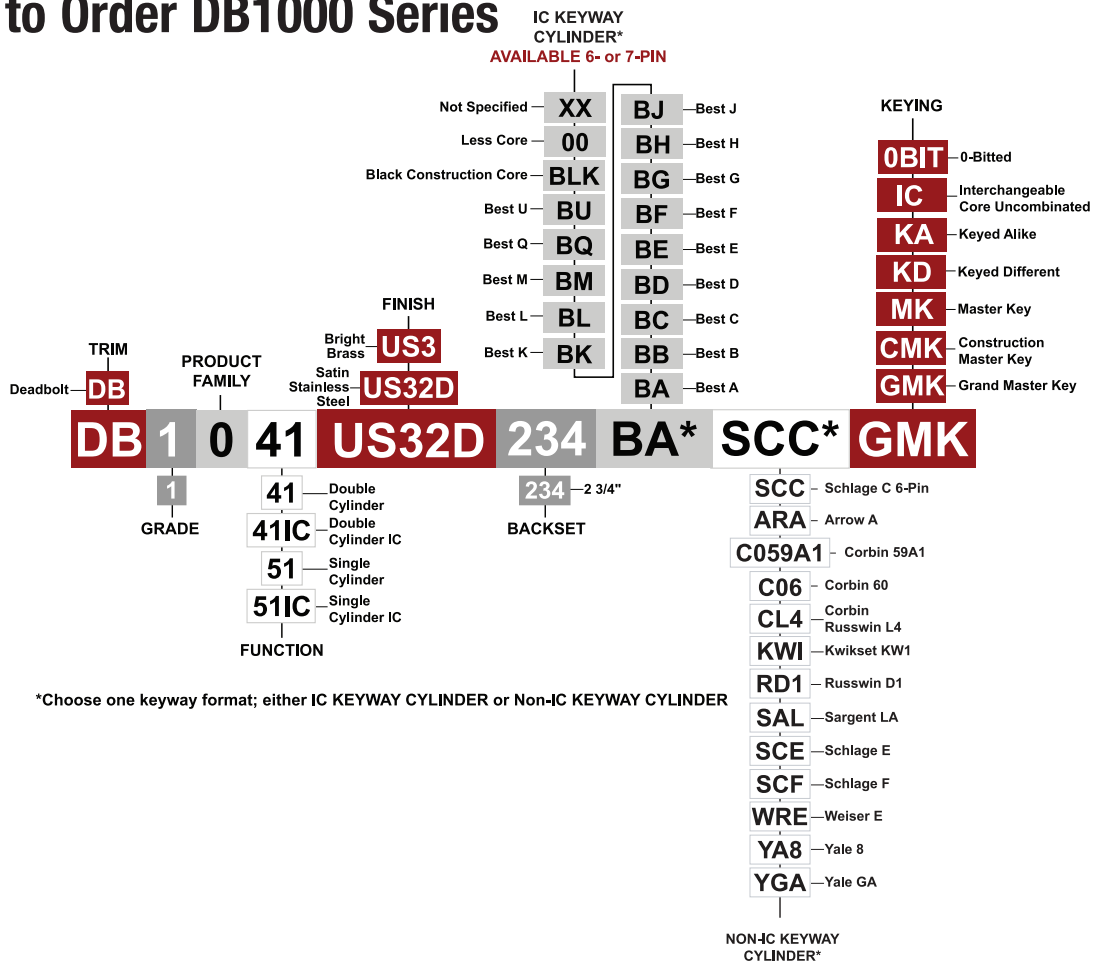

DB2000/DB2400 SERIES

Grade 2 Deadbolts



DB2000 SERIES



DB2400 SERIES HEAVY-DUTY

Standard Features






- **Performance** Complies with ANSI A156.5, Grade 2, 150,000 cycles
- **Deadbolt** 1" x 2-1/4", square corner faceplate, 1" housing diameter (stainless steel), 1" throw, roller bar (added security for hacksaw or reciprocating blade cutting)
- **Backset** Adjustable 2-3/8" to 2-3/4". 2-1/4" x 1" faceplate standard. Drive-In optional.
- **Strike** 1-1/8" x 2-3/4", square corner faceplate
- **Door Range** 1-3/8" - 1-3/4"
- **Door Preparation** 2-1/8" diameter for bore, 1" diameter for bolt. Fits standard 161 door prep.
- **Cylinder** Schlage (SCC) - 6-pin solid brass, C keyway, keyed different (KD)
- **Other Cylinder Options** Arrow A (ARA), Corbin 59A1 (C059A1), Corbin 60 (C06), Corbin Russwin L4 (CL4), Kwikset (KW1), Russwin D1 (RD1), Sargent LA (SAL), Schlage E (SCE), Schlage F (SCF), Weiser E (WRE), Yale 8 (YA8), Yale GA (YGA)
- **Keys** Two nickel silver per lock cylinder
- **IC Keyway Cylinder** Best A (BA), Best B (BB), Best C (BC), Best D (BD), Best E (BE), Best F (BF), Best G (BG), Best H (BH), Best J (BJ), Best K (BK), Best L (BL), Best M (BM), Best Q (BQ), Best U (BU), Black construction core (BLK), Less core (00), Not specified (XX)
- **Warranty** 1 year limited

AVAILABLE 6- OR 7-PIN

Optional Features

- **Cylinder** Other manufacturers including small format interchangeable cores
- **Keying** Grand master key (GMK), construction master key (CMK), master key (MK), keyed different (KD), keyed alike (KA), interchangeable core uncombined (IC), 0-bitted (0BIT)

DB2000 Series Function Chart

FUNCTION	FUNCTION NO.	OUTSIDE	INSIDE	FUNCTION DESCRIPTION	ANSI NO.
Double Cylinder	41			■ Deadbolt operated by key outside, key inside	E0142
Single Cylinder	51			■ Deadbolt operated by key outside, thumbturn inside	E0152
Single Cylinder Heavy-Duty	51HD			■ Deadbolt operated by key outside, thumbturn inside	E0152
Communicating	25			■ Deadbolt operated by inside thumbturn only	E0162
Communicating with Backplate	K25			■ Deadbolt operated by inside thumbturn only with backplate	E0162


DB2000 Series Accessory

CL100177

Adjustable drive-in latch.



How to Order DB2000 Series

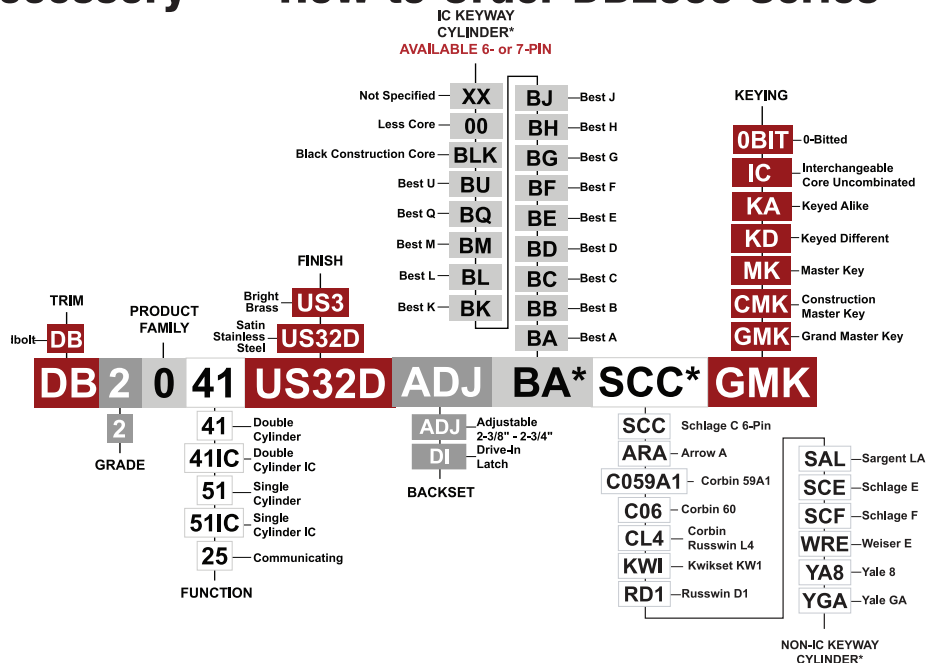

*Choose one keyway format; either IC KEYWAY CYLINDER or Non-IC KEYWAY CYLINDER

INDICATOR DEADBOLT



Standard Features

- **Performance** Complies with ANSI A156.5, Grade 2, 150,000 cycles, ULc listed, 3 hour fire rating. Complies with ADA.
- **Chassis** Tubular, steel
- **Deadbolt** 1" x 2-1/4" square corner faceplate, 1" throw (solid brass with hardened steel rod insert), standard thumbturn
- **Backset** Adjustable, 2-3/4" and 2-3/8"
- **Strike** 1-1/8" x 2-3/4" square corner standard
- **Door Range** 1-3/8" to 2"
- **Door Preparation** 2-1/8" diameter for bore, 1" diameter for bolt. Fits standard 161 door prep.
- **Warranty** 1 year limited

Storefront Deadbolt & Hook Bolt Mortise Lock



**Deadbolt Mortise Lockset
1-1/8" AL LH***

AD100205

NOTE: Cylinders sold separately



**Deadbolt Mortise Lockset
1-1/8" Duro LH**

AD100207

NOTE: Cylinders sold separately



**Hook Bolt Mortise Lockset
1-1/8" AL LH**

AD100213

NOTE: Cylinders sold separately



**Hook Bolt Mortise Lockset
1-1/8" Duro LH**

AD100215


NOTE: Cylinders sold separately

Standard Features

- **Case:** 1" x 6" steel case and mechanism (case depth varies with "Backset". All parts are zinc plated, for protection against corrosion).
- **Security:** Huge five ply laminated steel bolt with concealed hardened steel pin provides maximum security for any single leaf door, or a typical installation where gap between door and jamb is greater than it should be.
- **Backsets:** 1-1/8" backset and 31/32" backset available
- **Key:** 360° turn of key (or thumbturn) actuates the simple pivoting mechanism, which in turn throws or retracts the counter-balanced steel bolt. Key can be removed only when bolt is in a positively locked or unlocked position.
- **Face Plates:** 1" X 6-7/8" aluminum or duronodic beveled
- **Cylinders:** Both mortise locks accept any standard 1-5/32" mortise cylinder or thumbturn, with proper cylinder cam, from either/or both sides.
- **Finishes:** AL / Aluminum, Duro / Duronodic

*NOTES: AL = Aluminum, Duro = Duronodic, LH = Left Hand, RH = Right Hand

How to Order Deadbolt, Hook Bolt Mortise Locks

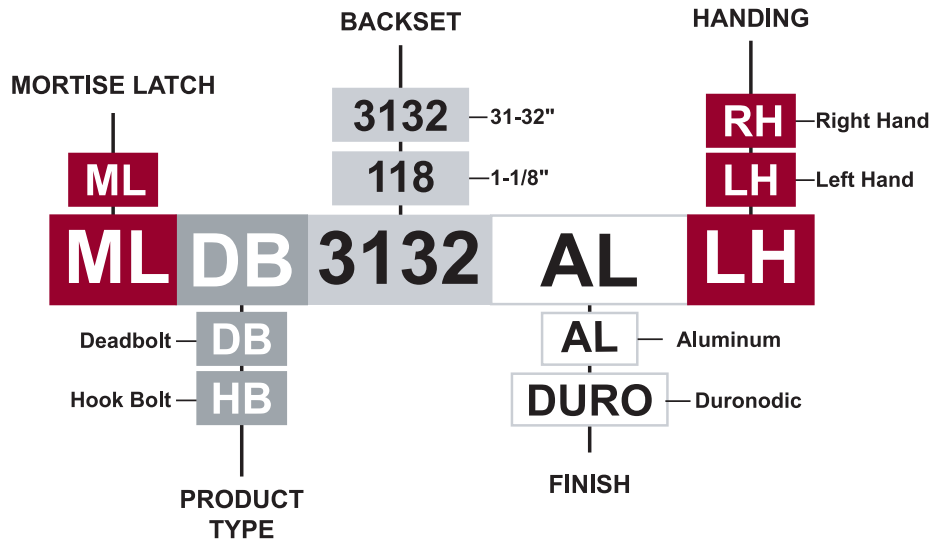

Tell Part Numbers

1-1/8"	MLDB118ALLH = Mortise Lockset Deadbolt 1-1/8" AL LH / AD100205	MLHB118ALLH = Mortise Lockset Hook Bolt 1-1/8" AL LH / AD100213	1-1/8"
	MLDB118ALRH = Mortise Lockset Deadbolt 1-1/8" AL RH / AD100206	MLHB118ALRH = Mortise Lockset Hook Bolt 1-1/8" AL RH / AD100214	
	MLDB118DUROLH = Mortise Lockset Deadbolt 1-1/8" Duro LH / AD100207	MLHB118DUROLH = Mortise Lockset Hook Bolt 1-1/8" Duro LH / AD100215	
	MLDB118DURORH = Mortise Lockset Deadbolt 1-1/8" Duro RH / AD100208	MLHB118DURORH = Mortise Lockset Hook Bolt 1-1/8" Duro RH / AD100216	
31-32"	MLDB3132ALLH = Mortise Lockset Deadbolt 31-32" AL LH / AD100209	MLHB3132ALLH = Mortise Lockset Hook Bolt 31-32" AL LH / AD100217	31-32"
	MLDB3132ALRH = Mortise Lockset Deadbolt 31-32" AL RH / AD100210	MLHB3132ALRH = Mortise Lockset Hook Bolt 31-32" AL RH / AD100218	
	MLDB3132DUROLH = Mortise Lockset Deadbolt 31-32" Duro LH / AD100211	MLHB3132DUROLH = Mortise Lockset Hook Bolt 31-32" Duro LH / AD100219	
	MLDB3132DURORH = Mortise Lockset Deadbolt 31-32" Duro RH / AD100212	MLHB3132DURORH = Mortise Lockset Hook Bolt 31-32" Duro RH / AD100220	

NOTES: AL = Aluminum, Duro = Duronodic, LH = Left Hand, RH = Right Hand

Storefront Deadlatch Mortise Lock



Deadlatch Lockset 1-1/8" AL LH*

AD100221

NOTE: Levers & cylinders sold separately



Deadlatch Lockset 1-1/8" Duro LH

AD100223


NOTE: Levers & cylinders sold separately

Standard Features

- **Case:** 1" x 6" steel, zinc plated
- **Security:** When in locked position, the auxiliary bolt is engaged by pushing against the strike creating additional security to the latchbolt.
- **Backsets:** 31/32", 1-1/8", and 1-1/2" available. (1-1/2" available for Aluminum only).
- **Key:** A reverse turn of the key (while bolt is held retracted) retains the latchbolt, to allow two way traffic for buildings that require free entrance at times and exit only at other times.
- **Face Plates:** 1" X 6-7/8" aluminum or duronodic beveled
- **Cylinders:** Both mortise locks accept any standard 1-5/32" mortise cylinder or thumbturn, with proper cylinder cam, from either/or both sides.
- **Finishes:** AL / Aluminum, Duro / Duronodic
- **Usability:** Provides flexibility of traffic control during & after business hours. It incorporates a key-controlled bolt holdback feature.
- **Latchbolt:** 5/8" x 1" x 1/2" throw, non-handed. Easily reversed with a screwdriver. Zinc alloy with delrin plastic insert to ensure quiet strike latching.
- **Auxiliary Bolt:** Zinc diecast. Deadlocks latchbolt, and prevents jimmying opening the latchbolt with knife-like objects or tools.
- **Strike Plate:** 2-5/8" x 1-7/8" stainless steel
- **Lever Handle:** Zinc diecast

*NOTES: AL = Aluminum, Duro = Duronodic, LH = Left Hand, RH = Right Hand

How to Order **Deadlatch** Mortise Locks

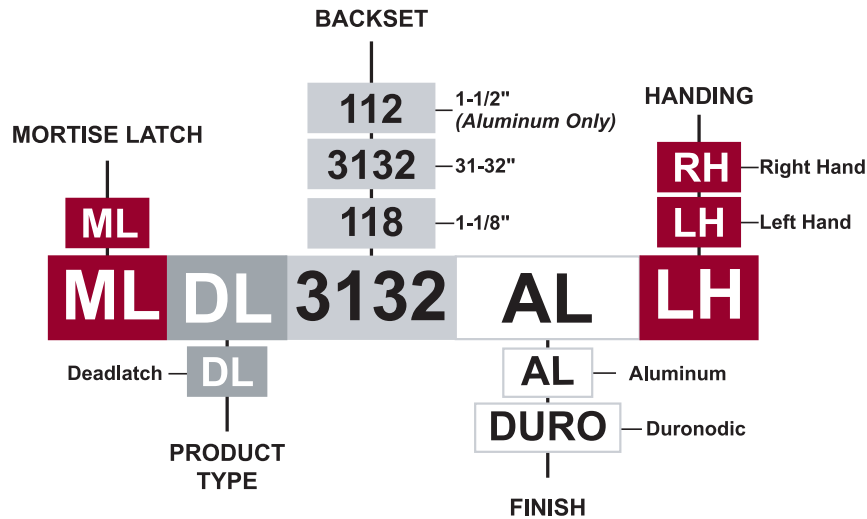

Tell Part Numbers

1-1/8"	MLDL118ALLH = Mortise Lock Deadlatch Lockset 1-1/8" AL LH / AD100221	MLDL112ALLH = Mortise Lock Deadlatch Lockset 1-1/2" AL LH / AD100272	1-1/2"
	MLDL118ALLH = Mortise Lock Deadlatch Lockset 1-1/8" AL RH / AD100222	MLDL112ALRH = Mortise Lock Deadlatch Lockset 1-1/2" AL RH / AD100273	
	MLDL118DUROLH = Mortise Lock Deadlatch Lockset 1-1/8" Duro LH / AD100223		
	MLDL118DURORH = Mortise Lock Deadlatch Lockset 1-1/8" Duro RH / AD100224		
31-32"	MLDL3132ALLH = Mortise Lock Deadlatch Lockset 31/32" AL LH / AD100225		
	MLDL3132ALRH = Mortise Lock Deadlatch Lockset 31/32" AL RH / AD100226		
	MLDL3132DUROLH = Mortise Lock Deadlatch Lockset 31/32" Duro LH / AD100227		
	MLDL3132DURORH = Mortise Lock Deadlatch Lockset 31/32" Duro RH / AD100228		

NOTES: AL = Aluminum, Duro = Duronodic, LH = Left Hand, RH = Right Hand

Storefront Cylinders, Turns & Levers



**Deadlatch Lever Handle with
Cam Plug AL RH***

AD100275



**Deadlatch Lever Handle with
Cam Plug Duro RH***

AD100277



**Thumbturn cylinder
with trim rings.
AL diecast.***

AD100278



**Thumbturn cylinder
with trim rings.
Duro diecast.***

AD100279



**Mortise lock (cylinder)
1" K2 Kwikset
Cylinder AL***

AD100282



**Mortise lock (cylinder)
1" K2 Kwikset
Cylinder Duro***

AD100283

How to Order **Cylinders, Thumbturns & Levers**

TYPE	FINISH	HANDING	BODY	KEYWAY	PART NO.	QTY. / PACK
LEVER HANDLE	AL	LH	—	—	AD100274	1
	AL	RH	—	—	AD100275	1
	Duro	LH	—	—	AD100276	1
	Duro	RH	—	—	AD100277	1
THUMBTURN CYLINDER w/ TRIM RING	AL	—	Diecast	—	AD100278	1
	Duro	—	Diecast	—	AD100279	1
	AL	—	Brass	—	AD100280	1
	Duro	—	Brass	—	AD100281	1
MORTISE LOCK CYLINDER w/ TRIM RING	AL	—	Diecast	Kwikset	AD100282	2 / Keyed Alike
	Duro	—	Diecast	Kwikset	AD100283	2 / Keyed Alike
	AL	—	Diecast	Kwikset	AD100284	50 / Keyed Alike
	Duro	—	Diecast	Kwikset	AD100285	50 / Keyed Alike
	AL	—	Diecast	Schlage	AD100286	2 / Keyed Alike
	Duro	—	Diecast	Schlage	AD100287	2 / Keyed Alike

NOTE: AL = Aluminum, Duro = Duronodic, LH = Left Hand, RH = Right Hand

Tell Part Numbers

Deadlatch Lever Handle with Cam Plug AL RH / AD100275

Deadlatch Lever Handle with Cam Plug AL LH / AD100274

Deadlatch Lever Handle with Cam Plug Duro RH / AD100277

Deadlatch Lever Handle with Cam Plug Duro LH / AD100276

Thumbturn Cylinder with trim rings. AL diecast / AD100278

Thumbturn Cylinder with trim rings. Duro diecast / AD100279

Thumbturn Cylinder with trim rings. Solid Brass diecast / AD100280

Thumbturn Cylinder with trim rings. Duro Solid Brass diecast / AD100281

Mortise Lock Cylinder 1" K2 Kwikset Cylinder AL / AD100282

Mortise Lock Cylinder 1" K2 Kwikset Cylinder Duro / AD100283

Mortise Lock Cylinder 1" K50 Kwikset Cylinder AL / AD100284


Mortise Lock Cylinder 1" K50 Kwikset Cylinder Duro / AD100285

Mortise Lock Cylinder 1" K2 Schlage Cylinder AL / AD100286

Mortise Lock Cylinder 1" K2 Schlage Cylinder Duro / AD100287

NOTES: AL = Aluminum, Duro = Duronodic, LH = Left Hand, RH = Right Hand, K2 = 2 Kwikset Cylinders per pack; K50 = 2 Kwikset Cylinders per pack

Paddle Latches



Paddle latch, Pull reversible. LH, Duro diecast.*

AD100360



Paddle latch, Pull reversible. RH, AL diecast.*

AD100361



Paddle latch, Push reversible. LH, Duro diecast.*

AD100362



Paddle latch, Push reversible. RH, AL diecast.*

AD100363

Standard Features

- **Escutcheon:** The escutcheon is 4" (101.6) high by 1-11/32" (34.1) wide.
- **Size:** Total width of paddle and housing is 5-7/16" (137.9).
- **Projection:** Neutral projection of the paddle from the door face is 2-5/16" (58.6).
- **Application:** Designed for use with the lock/latch. A latched entrance can be opened by pushing or pulling the paddle in the direction of the door swing.

Pull Handle & Combo Push/Pull Handle



9" Exterior pull handle. AL, diecast*

AD100364



9" Exterior pull handle. Bronze, diecast*

AD100365



Combo Push / Pull handle. AL, diecast*

AD100366



Combo Push / Pull handle. Bronze, diecast*


AD100367

Standard Features

- **Size:** 1" (25.4) round bent bar
- **Dimension:** 90 degree offset pull is available with a 9" centerline dimension

* AL = Aluminum, Duro = Duronodic, LH = Left Hand, RH = Right Hand

Dimensions

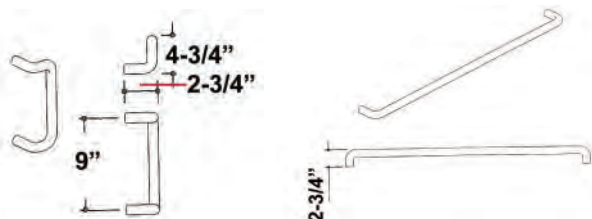

How to Order Paddle Latches, Pull Handles & Combo Push/Pull Handles

TYPE	FINISH	HANDING	BODY	PART NO.	QTY. / PACK
PADDLE LATCH	AL	LH	Diecast	AD100360	1
	AL	RH	Diecast	AD100361	1
	Duro	LH	Diecast	AD100362	1
	Duro	RH	Diecast	AD100363	1
EXTERIOR PULL HANDLE	AL	—	Diecast	AD100364	1
	Duro	—	Diecast	AD100365	1
COMBO PUSH / PULL HANDLE	AL	—	Diecast	AD100366	2
	Duro	—	Diecast	AD100367	2

NOTE: AL = Aluminum, Duro = Duronodic, LH = Left Hand, RH = Right Hand

Tell Part Numbers

Paddle Latch, Pull reversible

AL Diecast LH

AD100360

Paddle Latch, Pull reversible

AL Diecast RH

AD100361

Paddle Latch, Pull reversible

DURO Diecast LH

AD100362

Paddle Latch, Pull reversible DURO

Diecast RH

AD100363

9" Exterior Pull Handle

AL Diecast

AD100360

9" Exterior Pull Handle

Bronze Diecast

AD100365

Combo Push / Pull Handle

AL Diecast

AD100366

Combo Push / Pull Handle

Bronze Diecast

AD100367

NOTES: AL = Aluminum, Duro = Duronodic, LH = Left Hand, RH = Right Hand

MORTISE & RIM CYLINDERS



Mortise Cylinder

- Machined from solid brass or bronze bar stock. Six pin SCC cylinder standard. Contact customer service for competitive keyway availability. Available in 15/16", 1-1/8" and 1-1/4" lengths. Contact Customer service for other lengths. See price list for optional cams available.



IC Mortise Cylinder

- Machined from solid brass or bronze bar stock. Security set screw provided that holds cylinder securely in the housing. Compatible with Best small format 6 or 7 pin cores. Available in 1-1/8" and 1-1/4" lengths. Contact Customer service for other lengths. See price list for optional cams available.



Dummy Mortise Cylinder

- Machined from solid brass or bronze bar stock. Available only in 15/16" length.



Thumbpiece Mortise Cylinder

- Machined from solid brass or bronze bar stock. Available in 15/16", 1-1/8" and 1-1/4" lengths. See price list for optional cams available.



Rim Cylinder

- Machined from solid brass or bronze bar stock. Six pin SCC cylinder standard. Contact customer service for competitive keyway availability.



IC Rim Cylinder

- Machined from solid brass or bronze bar stock. Compatible with Best small format 6 or 7 pin cores.



Keying

TELL Restricted Keyway Cylinder

Restricted keyway cylinder can key both the cylinder and interchangeable core in one lock. The cylinders and IC cores are interchangeable.

Tell keyway cylinder is available **only** keyed to 6-pin.

Tell interchangeable core (IC) cylinder can be keyed to 6-pin or 7-pin interchangeable core.

Other Cylinders*

Schlage (SCC), Schlage E (SCE), Arrow A (ARA), Corbin 60 (C06), Corbin 59A1 (C059A1), Corbin Russwin L4 (CL4), Russwin D1 (RD1), Sargent LA (SAL), Schlage F (SCF), Weiser E (WRE), Yale 8 (YA8), Yale GA (YGA)

* All cylinders 6-pin, and can also be pinned 5-pin

IC Keyway Cylinder*

Tell, Best A (BA), Best B (BB), Best C (BC), Best D (BD), Best E (BE), Best F (BF), Best G (BG), Best H (BH), Best J (BJ), Best K (BK), Best L (BL), Best M (BM), Best Q (BQ), Best U (BU), Black construction core (BLK), Less core (00), Not specified (XX)

* Available 6-pin or 7-pin

Standard Keying


0 Bitted with (2) blank keys
Keyed alike, 4 or less cylinders (KA4)
Keyed alike, 5 or more cylinders (KA)
Master keyed (MK, GMK)
Construction keying, lost ball method, (add to other keying charges)
Keyed to existing numbers
Extra cut keys
Key marking AA1, AA2, etc. (per key)
Key marking other than keyset (per key)

Interchangeable Core Keying


Uncombined cores (no springs & pins)
Combined cores includes masterkeying
Best "A" keyway construction cores
Plastic dummy cores
Extra cut keys
Key marking AA1, AA2, etc. (per key)
Key marking other than keyset (per key)




Tell



Yale



Yale 8



Weiser E



Schlage F



Sargent LA




Schlage E



Schlage C



Russwin D1



Corbin/
Russwin CD



Corbin 60



Corbin



Arrow



Standard Cams



YALE STANDARD CAM
CL100598



ADAMS RITE CAM
CL100469

IC Core Cams



YALE STANDARD IC CORE CAM
CL100276



ADAMS RITE IC CORE CAM
CL100277



CLOVER IC CORE CAM
CL100278



SCHLAGE IC CORE CAM
CL100280



SARGENT IC CORE CAM
CL100279

NOTE: Above IC Cams are removeable

Door Closers
Red Tab

Door Closers Red
Tab back

COMMERCIAL DOORS & HARDWARE
table of contents

DOOR CLOSERS

	PAGE
500 Grade 3 Surface	1
600 Grade 1 Surface	8
700 Grade 1 Surface	15
800 Grade 1 Surface	20
900 Grade 1 Surface	27
1000/2000 Residential Surface	37



500 SERIES

Standard-Duty Grade 3 Surface Applied Closers




Standard Features

- **Performance** Complies with ANSI A156.4, Grade 3, 500,000 cycles, UL/ULC listed up to 3 hours fire rated
- **Chassis/Closer** Cast aluminum
- **Handing** Non-handed
- **Mounting** **TRI-PACK** — regular, top jamb and parallel arm applications.
- **Main Arm** Stamped steel, accommodates reveals up to 3 1/4", adjustable extension arm
- **Spring Power** Adjustable 1 - 4 sizes
- **Backcheck** Adjustable, hydraulic - providing cushioning and preventing uncontrolled door openings.
- **Valves** Adjustable, independent, non-critical (sweep and latch), consistent closing speeds
- **Fasteners** Metal screws included for hollow metal and aluminum mounting applications. Wood screws included for wood door mounting applications. Thru-bolts optional.
- **Door Range** Up to 180 degrees
- **Door Preparation** 9-1/16" horizontal and 3/4" vertical mounting hole locations (retrofits traditional closer)
- **Warranty** 10 year limited

500 Series Application Drawings:


Regular Arm Installation

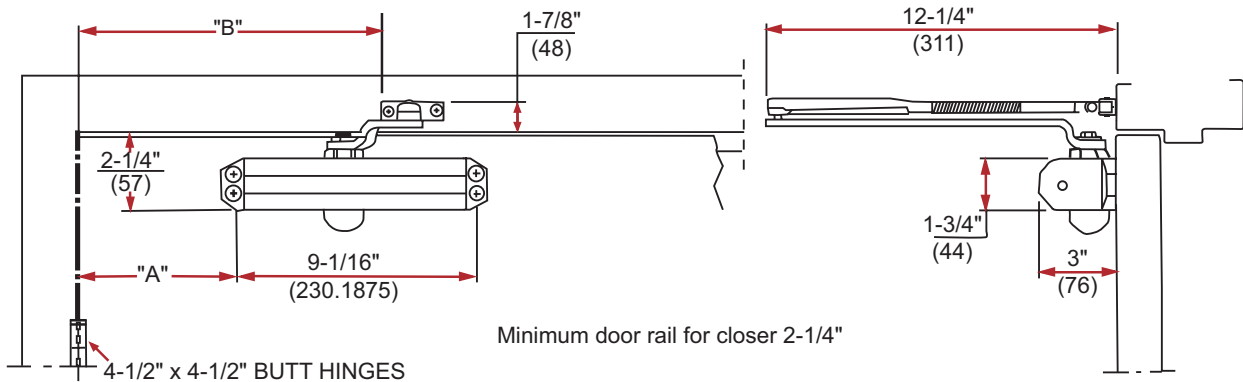

TEMPLATE REFERENCE	DIM "A"	DIM "B"	APPROX. MAXIMUM OPENING	APPROX. BACKCHECK RANGE
TO 120°	5-1/8" (130)	11-5/8" (295)	122°	67°-122°
OVER 120°	3-11/16" (94)	9-5/8" (244)	180°	87°-180°

Note: Dimensions shown are inches / millimeters

Parallel Arm Installation

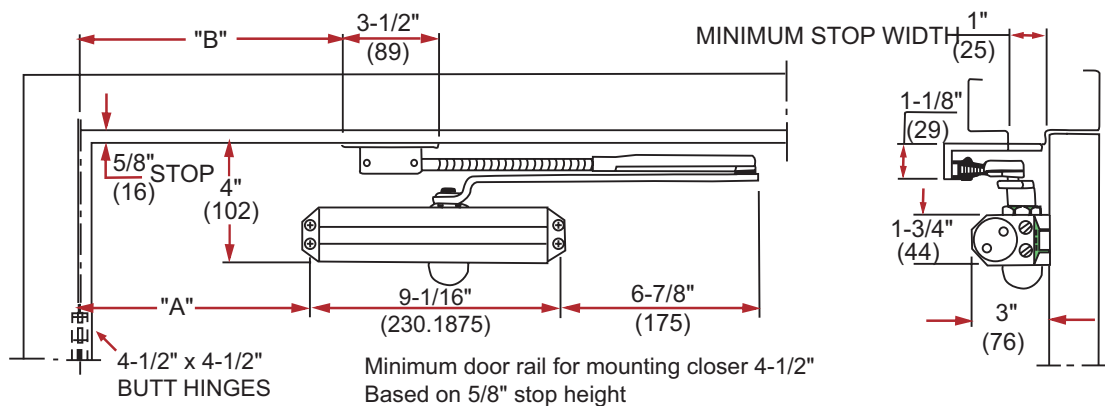


TEMPLATE REFERENCE	DIM "A"	DIM "B"	APPROX. MAXIMUM OPENING	APPROX. BACKCHECK RANGE	MINIMUM DOOR WIDTH
TO 120°	7-11/16" (195)	8-13/16" (224)	124°	82°-124°	24" (635)
OVER 120°	6-5/16" (160)	7-1/8" (181)	180°	95°-180°	24" (610)

Note: Dimensions shown are inches / millimeters

500 Series Application Drawings:

Top Jamb Installation

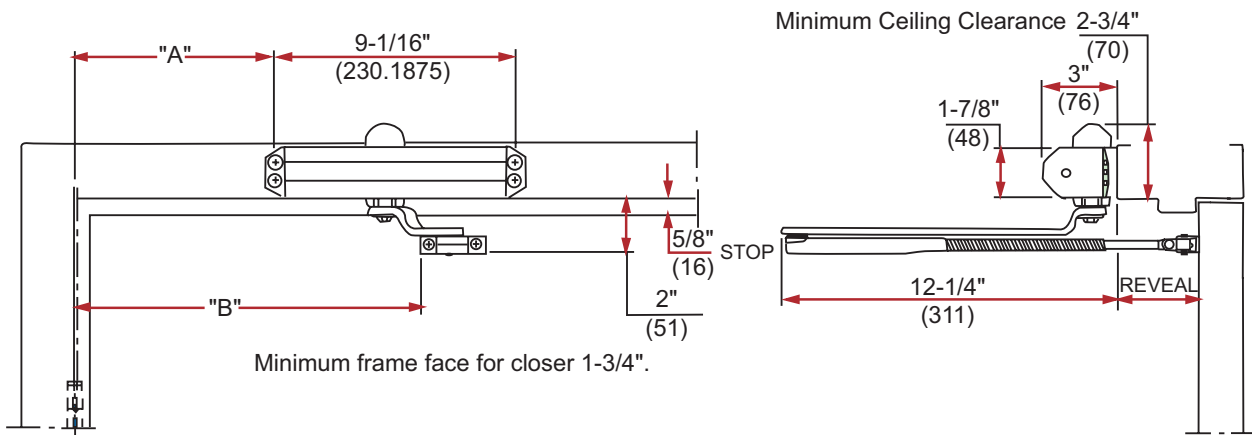

TEMPLATE REFERENCE	DIM "A"	DIM "B"	APPROX. MAXIMUM OPENING	APPROX. BACKCHECK RANGE
TO 120°	6-1/4" (159)	12" (305)	125°	77°-125°
OVER 120°	4-1/4" (108)	10" (254)	180°*	93°-180°

* 2-3/4 maximum Reveal for 180° opening
Note: Dimensions shown are inches / millimeters

500 Series Accessories:

Backplate

DC100131 (AL)

DC100132 (Duro)

For top jamb mount where overhead ceiling clearance is less than 2-3/4" or for regular mount to clear a mortised stop/holder.



Drop Plate

DC100100 (AL)

DC100129 (Duro)

For top jamb mount when overhead ceiling clearance is less than 1-7/8" or to provide clearance for overhead holder. Also permits parallel arm installation on doors with a minimum top rail of 2-1/2".



Parallel Arm Bracket, (PAB)

DC100117 (AL)

DC100192 (Duro)

Used when mounting as parallel arm with regular main arm and plunger hold open arm.



Friction Hold Open "L" Bracket, (FHO)

DC100225 (AL)

Used when mounting parallel arm or friction hold open (FHO) arm.



Sex Nuts:

SNB1

DC100222 (AL)

DC100095 (Duro)

Sex nuts with machine screws for 1-3/4" (44 mm) door.

SNB2

DC100089 (AL)

DC100203 (Duro)

Sex nuts with machine screws for 1-3/8" (35 mm) door.



NOTE: AL=Aluminum, Duro=Duranodic

500 Series Arms:

Regular Arm (Standard)

DC100118 (AL)

DC100119 (Duro)

Complete arm assembly with wrought main arm, stamped steel brouch insert, full articulating adjusting arm and 10mm threaded rod and shoe to accommodate 0 to 3-1/4" inch reveals.



Top Jamb Arm—Deep Reveal, (TJDR)

DC100101 (AL)

DC100134 (Duro)

Complete arm assembly with wrought main arm, stamped steel brouch insert, full articulating adjusting arm and 10mm threaded rod and shoe to accommodate 3-1/4" to 8 inch reveals.



Friction Hold Open Arm, (FHO)

DC100097 (AL)

DC100098 (Duro)

Complete hold open arm assembly with wrought main arm, stamped steel brouch insert, flat form articulating adjusting arm, rod and shoe. Provides positive single point hold open adjustable from approximately 80 degrees to 135 degrees.

*PA bracket optional



500 Series Cross Reference Chart:

TELL	CAL-ROYAL	DORMA	DOR-O-MATIC	INTERNATIONAL	LCN	NORTON	PARKER	SENTINEL	YALE
543BC/546BC	700BC/ 400BC	7203/ 7205	SC91/ SC94	683/685 783/785 883/885	N/A	9303BC/ 9305BC	953BC/ 955BC	SN42/43 SN73BC/ SN76BC	2303BC/ 2305BC
540BC	300P	N/A	N/A	N/A	N/A	N/A	N/A	SN71BC	N/A
541BC	300PBF	N/A	N/A		N/A	N/A	N/A	SN71BC	N/A

NOTE: This chart has been prepared by comparing functions of door closers. Since no products are exactly alike, the data on this chart represents our judgement of which products are most similar. Because information has been obtained from trade sources, it is not guaranteed nor represented that any specific product exactly equals any other product.

500 Series Door Sizing Charts:


Regular/ Top Jamb Installation	D O O R W I D T H						
	CLOSER		2'-0" min.	2'-6" max.	3'-0" max.	3'-6" max.	4'-0" max.
	540	Interior	N/A	N/A	✓	✓	✓
		Exterior	N/A	N/A	✓	Ⓢ	Ⓢ
	541	Interior	✓	✓	Ⓢ	Ⓢ	N/A
		Exterior	✓	✓	Ⓢ	N/A	N/A
	543 to 546	Interior	N/A	N/A	543	544	545
		Exterior	N/A	543	544	545	546
Parallel Arm Installation	D O O R W I D T H						
	CLOSER		2'-6" max.	3'-0" max.	3'-6" max.	4'-0" max.	
	540	Interior	✓	✓	✓	✓	
		Exterior	✓	Ⓢ	Ⓢ	N/A	
	541	Interior	✓	Ⓢ	N/A	N/A	
		Exterior	✓	N/A	N/A	N/A	
	543 to 546	Interior	543	544	545	546	
		Exterior	544	545	546	N/A	

✓ = Recommended

N/A = Not applicable or recommended

Ⓢ = Opening force 5 lbs. on interior and 8.5 lbs. on exterior doors

How to Order 500 Series:

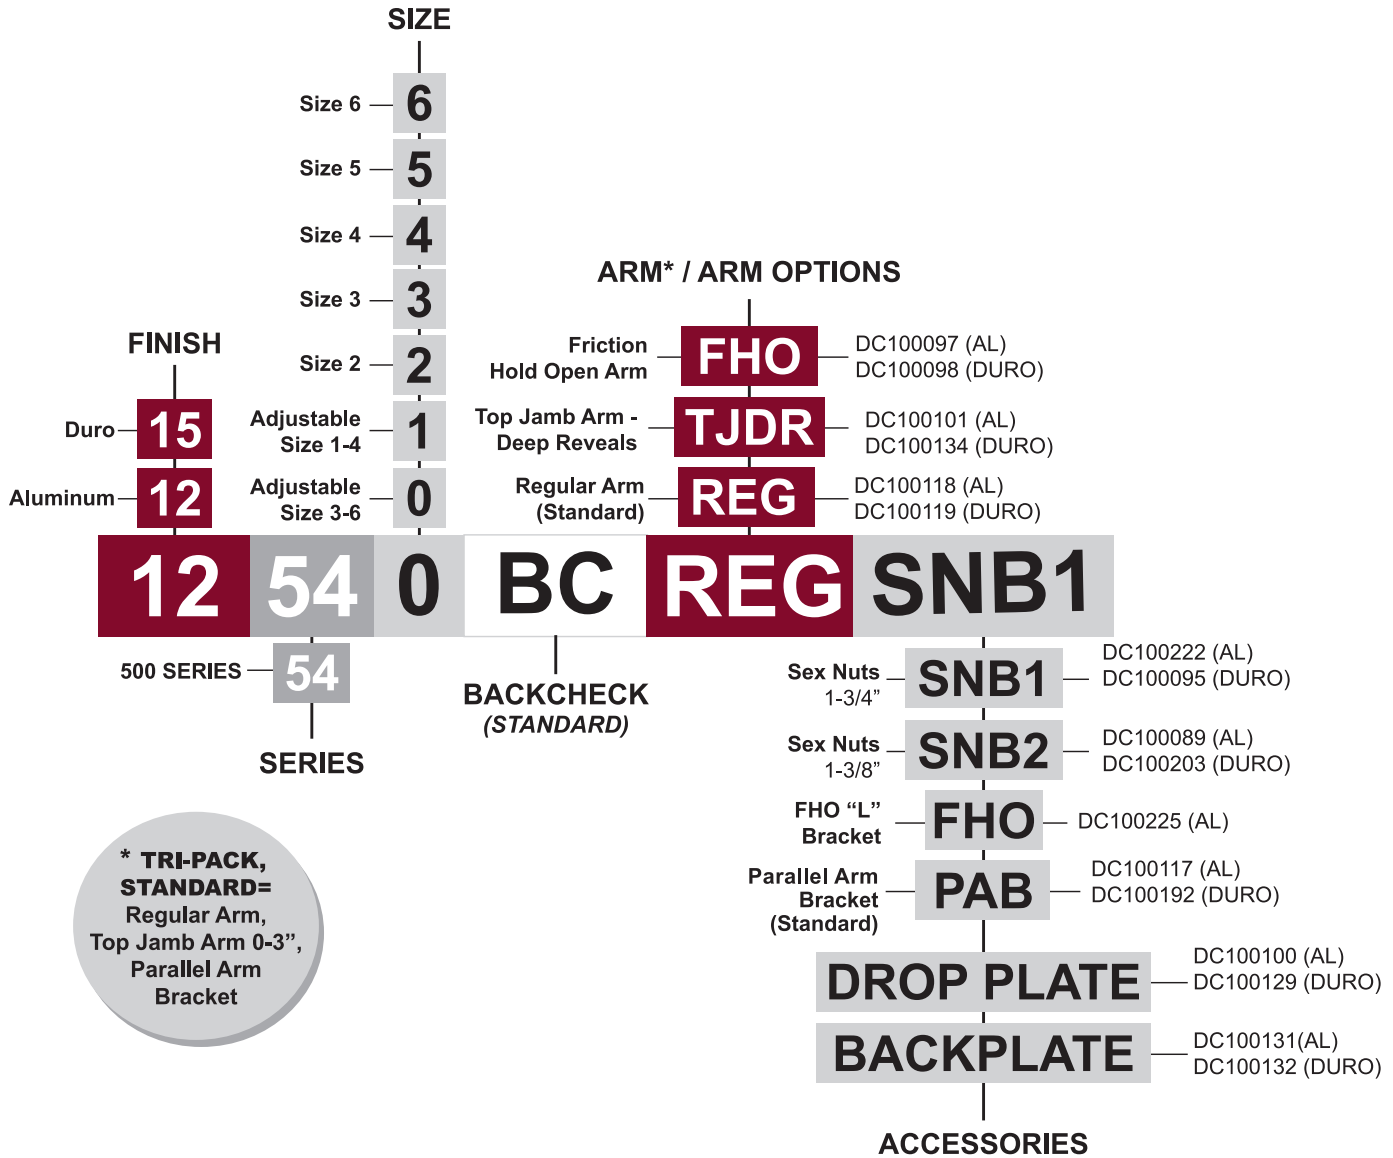

600 SERIES

Heavy-Duty Commercial Grade 1 Surface Applied Closers



Standard Features

- **Performance** Complies with ANSI A156.4, Grade 1, 2 million cycles, UL/ULC listed up to 3 hours fire rated
- **Chassis/Closer** Cast aluminum
- **Handing** Non-handed
- **Mounting** **TRI-PACK** — regular, top jamb and parallel arm applications.
- **Main Arm** Forged steel, accommodates reveals up to 3 1/4", adjustable extension arm
- **Spring Power** Adjustable 1 - 4 and 3 - 6 sizes
- **Backcheck** Adjustable, hydraulic - providing cushioning and preventing uncontrolled door openings.
- **Valves** Adjustable, independent, non-critical (sweep and latch), consistent closing speeds
- **Fasteners** Metal screws included for hollow metal and aluminum mounting applications. Wood screws included for wood door mounting applications. Thru-bolts optional.
- **Door Range** Up to 180 degrees
- **Door Preparation** 9-1/16" horizontal and 3/4" vertical mounting hole locations (retrofits traditional closer)
- **Warranty** 25 year limited

Optional Features


- **Covers** High impact plastic and plated kit: cover, arm & bracket.
- **Hold Open Arm** Forged steel with hold open adjustable from 80 to 135 degrees
- **Sex Nuts** For 1-3/8" or 1-3/4" thick doors

Other View:



600 Series Application Drawings:


Regular Arm Installation

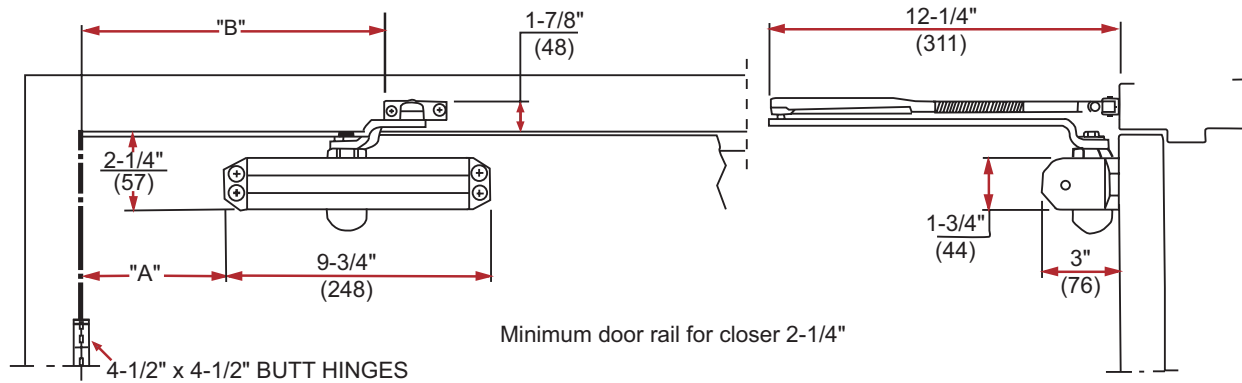

TEMPLATE REFERENCE	DIM "A"	DIM "B"	APPROX. MAXIMUM OPENING	APPROX. BACKCHECK RANGE
TO 120°	5-1/8" (130)	11-5/8" (295)	122°	67°-122°
OVER 120°	3-11/16" (94)	9-5/8" (244)	180°	87°-180°

Note: Dimensions shown are inches / millimeters

Parallel Arm Installation

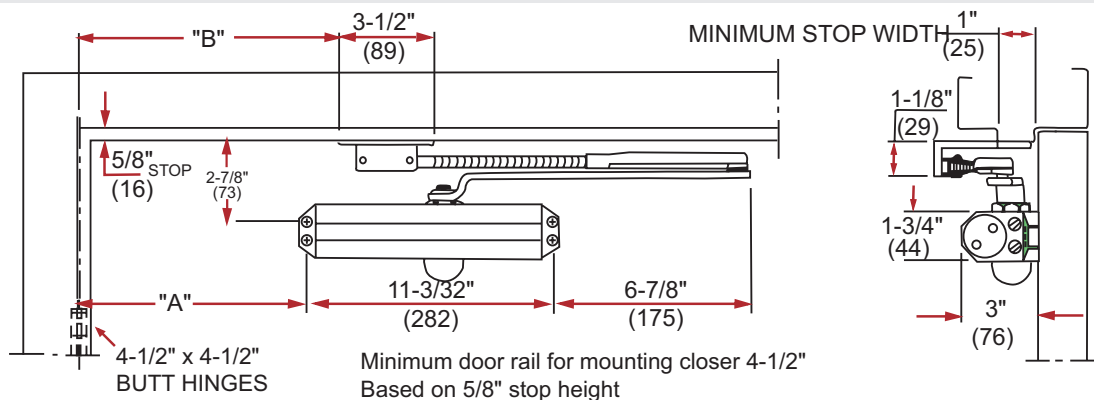


TEMPLATE REFERENCE	DIM "A"	DIM "B"	APPROX. MAXIMUM OPENING	APPROX. BACKCHECK RANGE	MINIMUM DOOR WIDTH
TO 120°	7-11/16" (195)	8-13/16" (224)	124°	82°-124°	24" (635)
OVER 120°	6-5/16" (160)	7-1/8" (181)	180°	95°-180°	24" (610)

Note: Dimensions shown are inches / millimeters

600 Series Application Drawings:

Top Jamb Installation

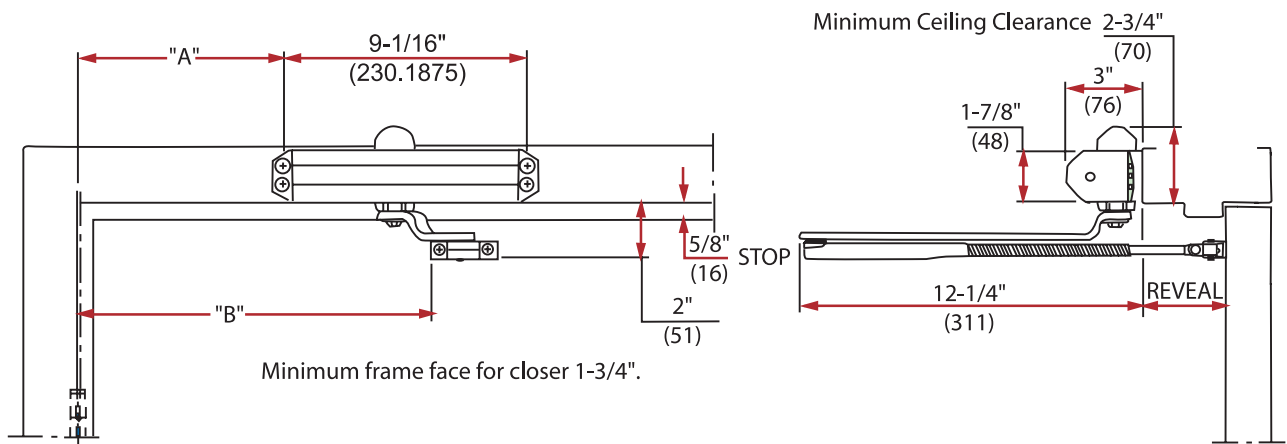

TEMPLATE REFERENCE	DIM "A"	DIM "B"	APPROX. MAXIMUM OPENING	APPROX. BACKCHECK RANGE
TO 120°	5-3/8" (137)	11-1/2" (292)	125°	77°-125°
OVER 120°	3-3/16" (81)	8-1/2" (216)	180°*	93°-180°

* 2-3/4 maximum Reveal for 180° opening
Note: Dimensions shown are inches / millimeters

600 Series Accessories:

Backplate

DC100131 (AL)

DC100132 (Duro)

For top jamb mount where overhead ceiling clearance is less than 2-3/4" or for regular mount to clear a mortised stop/holder.



Drop Plate

DC100100 (AL)

DC100129 (Duro)

For top jamb mount when overhead ceiling clearance is less than 1-7/8" or to provide clearance for overhead holder. Also permits parallel arm installation on doors with a minimum top rail of 2-1/2".



Parallel Arm Bracket, (PAB)

DC100117 (AL)

DC100192 (Duro)

Used when mounting as parallel arm with regular main arm and plunger hold open arm.



Friction Hold Open "L" Bracket, (FHO)

DC100225 (AL)

Used when mounting parallel arm or friction hold open (FHO) arm.



Sex Nuts:

SNB1

DC100222 (AL)

DC100095 (Duro)

Sex nuts with machine screws for 1-3/4" (44 mm) door.

SNB2

DC100089 (AL)

DC100203 (Duro)

Sex nuts with machine screws for 1-3/8" (35 mm) door.



NOTE: AL=Aluminum, Duro=Duranodic

600 Series Arm & Cover Options:

Regular Arm (Standard)

DC100118 (AL)

DC100119 (Duro)

Complete arm assembly with forged steel main arm, full articulating adjusting arm and 10mm threaded rod and shoe to accommodate 0" to 3-1/4" inch reveals.



Top Jamb Arm—Deep Reveals, (TJDR)

DC100101 (AL)

DC100134 (Duro)

Complete arm assembly with forged steel main arm, full articulating adjusting arm and 10mm threaded rod and shoe to accommodate 3-1/4" to 8" reveals.



Friction Hold Open, (FHO)

DC100097 (AL)

DC100098 (Duro)

Complete hold open arm assembly with forged steel main arm, flatform articulating adjusting arm and rod and shoe. Provides positive single point hold open adjustable from approximately 80 degrees to 135 degrees.

*PA bracket optional



Full Cover, (COV)

DC100102 (AL)

DC100103 (Duro)

High impact full plastic cover, non-handed.



Arm & Cover Kit

DC100165 (US3)

DC100167 (US26)

Optional Plated Kit includes non-handed full metal cover, regular arm, parallel arm bracket and all fasteners in matching plated finish.



NOTE: AL=Aluminum, Duro=Duranodic, US3=Bright Brass, US26=Bright Chrome

600 Series Cross Reference Chart:

TELL	CAL-ROYAL	DORMA	DOR-O-MATIC	INTERNATIONAL	LCN	NORTON	PARKER	SENTINEL	YALE	SARGENT
642BC/	N/A	7302/	N/A	N/A	1074/1075	1602BC*/	952BC/	S52BC/	52BC*/	1132*/
646BC		7305				1606BC*	955BC	S56BC	56BC*	1135*
640BC	900-P	7436	SC60	9001	N/A	1601*	900BC	S50BC	51*	1130*
										1430
641BC	900-PBF	7414	SC61	9003	1071	1601BF*	BF900BC	S51BC	51BF*	1131*
										1431*

NOTE: This chart has been prepared by comparing functions of door closers. Since no products are exactly alike, the data on this chart represents our judgement of which products are most similar. Because information has been obtained from trade sources, it is not guaranteed nor represented that any specific product exactly equals any other product.

* RETROFIT INSTALLATION HOLE FOR HOLE

600 Series Door Sizing Charts:

Regular/ Top Jamb Installation	D O O R W I D T H						
	CLOSER		2'-0" min.	2'-6" max.	3'-0" max.	3'-6" max.	4'-0" max.
		640	Interior	N/A	N/A	✓	✓
		Exterior	N/A	N/A	✓		
	641	Interior	✓	✓			N/A
		Exterior	✓	✓		N/A	N/A
	643 to 646	Interior	N/A	N/A	643	644	645
		Exterior	N/A	643	644	645	646
Parallel Arm Installation	D O O R W I D T H						
	CLOSER		2'-6" max.	3'-0" max.	3'-6" max.	4'-0" max.	
		640	Interior	✓	✓	✓	✓
		Exterior	✓			N/A	
	641	Interior	✓		N/A	N/A	
		Exterior	✓	N/A	N/A	N/A	
	643 to 646	Interior	643	644	645	646	
		Exterior	644	645	646	N/A	


✓ = Recommended

N/A = Not applicable or recommended

= Opening force 5 lbs. on interior and 8.5 lbs. on exterior doors


✓ = Recommended
N/A = Not applicable or recommended
☐ = Opening force 5 lbs. on interior and 8.5 lbs. on exterior doors

How to Order 600 Series:

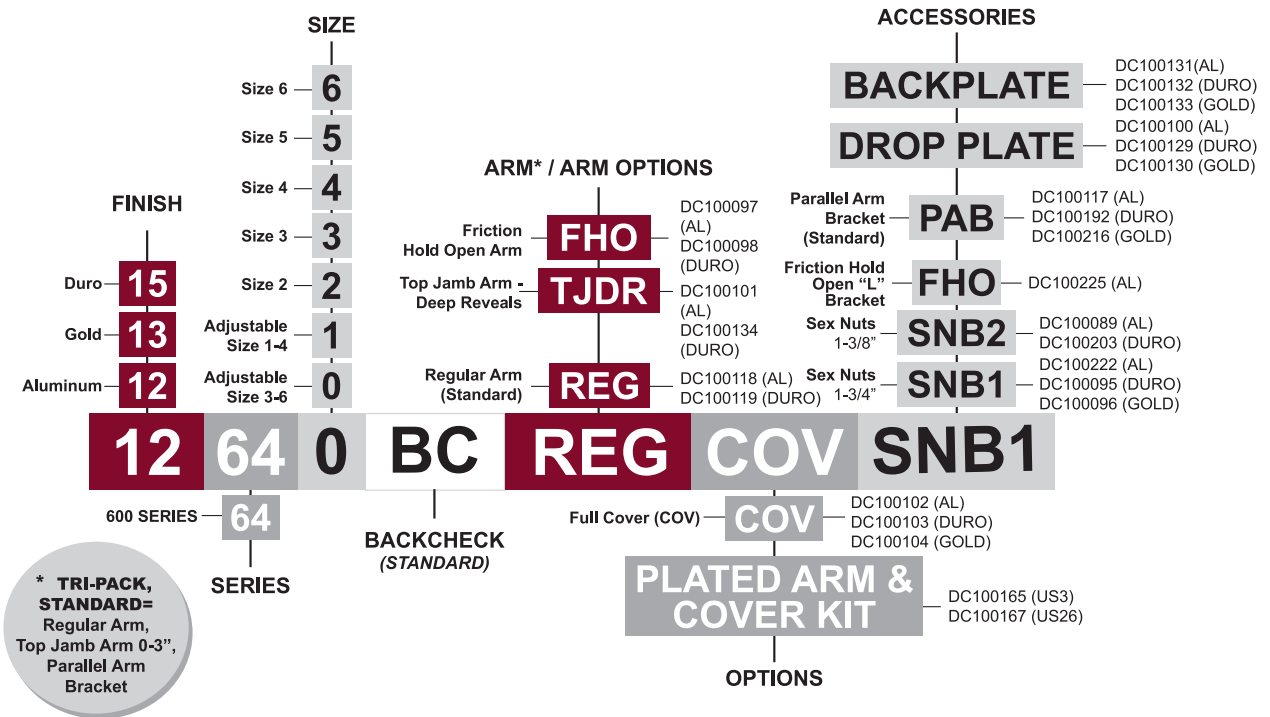

700 SERIES


Heavy-Duty Commercial Grade 1 Surface Applied Closer

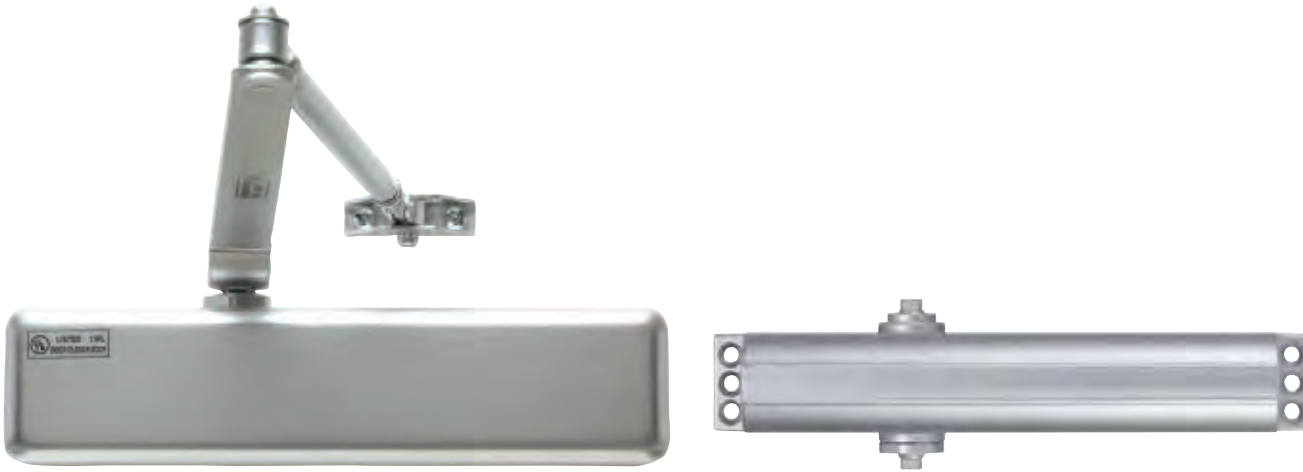

Standard Features

- **Performance** Complies with ANSI A156.4, Grade 1, 2,000,000 cycles, UL/ULC listed up to 3 hours fire rated
- **Chassis/Closer** Cast aluminum
- **Handing** Non-handed
- **Mounting** **TRI-PACK** — regular, top jamb and parallel arm applications.
- **Main Arm** Forged steel, accommodates reveals up to 3-1/4", adjustable extension arm
- **Spring Power** Adjustable 1 - 6 sizes
- **Backcheck** Adjustable, hydraulic - providing cushioning and preventing uncontrolled openings of the door
- **Valves** Adjustable, independent, non-critical (sweep and latch), consistent closing speeds
- **Fasteners** Metal screws included for hollow metal and aluminum mounting applications. Wood screws included for wood door mounting applications. Closers are packed with thru-bolts.
- **Door Range** Up to 180 degrees
- **Door Preparation** 11-3/32" horizontal and 3/4" vertical mounting hole locations (retrofits traditional closer)
- **Warranty** 25 years


700 Series Application Drawings: Regular Arm Installation

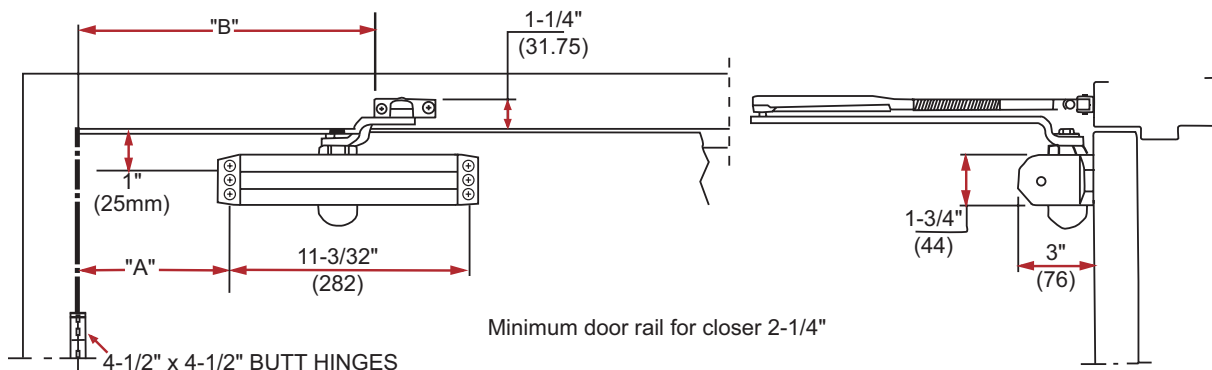

TEMPLATE REFERENCE	DIM "A"	DIM "B"	APPROX. MAXIMUM OPENING	APPROX. BACKCHECK RANGE
TO 120°	6-1/4" (159)	12" (305)	122°	67°-122°
OVER 120°	4-1/4" (108)	10" (254)	180°	87°-180°

Note: Dimensions shown are inches / millimeters

Parallel Arm Installation

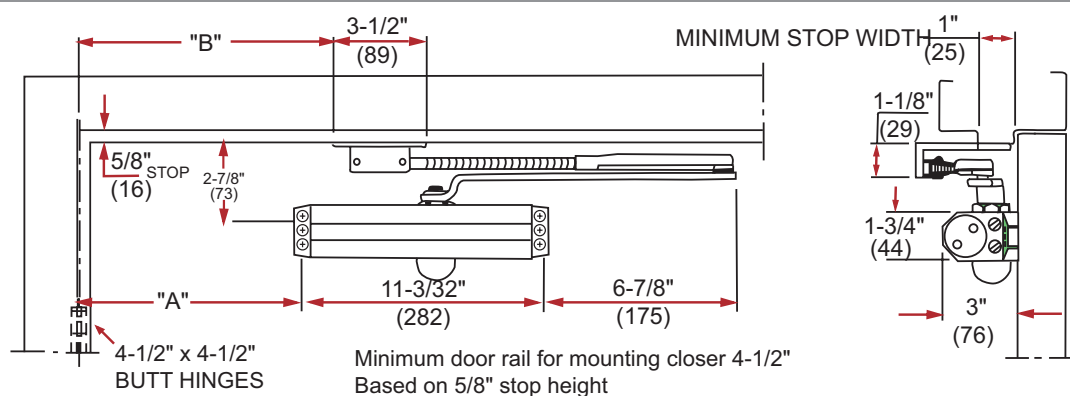


TEMPLATE REFERENCE	DIM "A"	DIM "B"	APPROX. MAXIMUM OPENING	APPROX. BACKCHECK RANGE
TO 120°	5" (127)	9-27/32" (250)	124°	82°-124°
OVER 120°	2" (50)	5-9/16" (150)	180°	95°-180°

Note: Dimensions shown are inches / millimeters

700 Series Application Drawings:

Top Jamb Installation

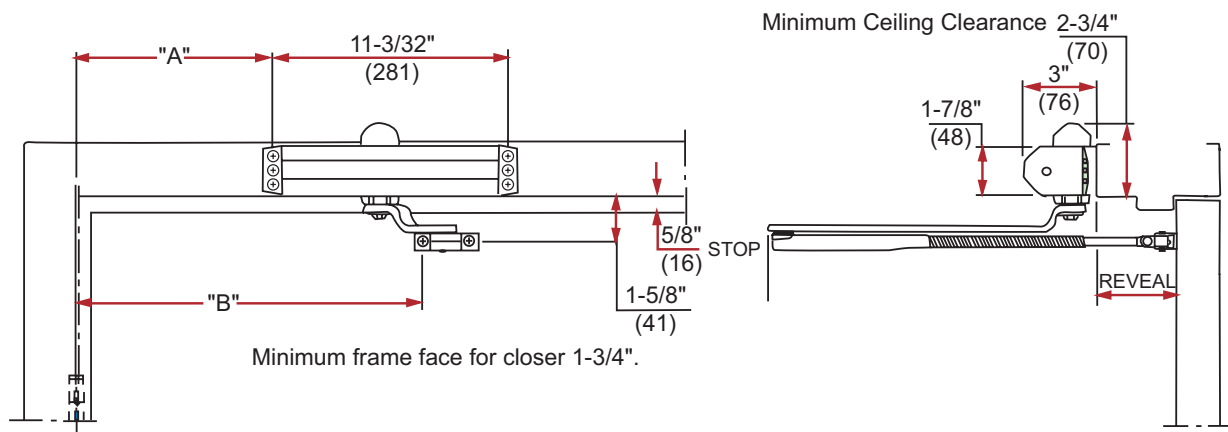

TEMPLATE REFERENCE	DIM "A"	DIM "B"	APPROX. MAXIMUM OPENING	APPROX. BACKCHECK RANGE
TO 120°	6-1/4" (159)	12" (305)	125°	77°-125°
OVER 120°	4-1/4" (108)	10" (254)	180°*	93°-180°

* 2-3/4" maximum Reveal for 180° opening
Note: Dimensions shown are inches / millimeters

700 Series Arms and Arm Options:

Friction Hold Open Arm, (FHO)

DC100410 (AL)

DC100411 (Duro)

Complete hold open arm assembly with forged steel main arm, flatform articulating adjusting arm and rod and shoe. Provides positive single point hold open adjustable from approximately 80 degrees to 135 degrees.

*PA bracket optional



Top Jamb Arm—Deep Reveals, (TJDR)

DC100101 (AL)

DC100134 (Duro)

Complete arm assembly with forged steel main arm, full articulating adjusting arm and 10mm threaded rod and shoe to accommodate 3-1/4" to 8" reveals.



Regular Arm (Standard)

DC100118 (AL)

DC100119 (Duro)

Complete arm assembly with forged steel main arm, full articulating adjusting arm and 10mm threaded rod and shoe to accommodate 0" to 3-1/4" inch reveals.



700 Series Cover:

Full Cover, (COV) (Standard)

High impact full plastic cover, non-handed.



700 Series Accessories:

Drop Plate

DC100408 (AL)

DC100409 (Duro)

For top jamb mount when overhead ceiling clearance is less than 1-7/8" or to provide clearance for overhead holder. Also permits parallel arm installation on doors with a minimum top rail of 2-1/2".



Sex Nuts:

SNB1

DC100222 (AL)

DC100095 (Duro)

SNB1 — Sex nuts with machine screws for 1-3/4" (44 mm) door.

SNB2

DC100089 (AL)

DC100203 (Duro)

SNB2 — Sex nuts with machine screws for 1-3/8" (35 mm) door.




Parallel Arm Bracket, (PAB) (Standard)

DC100117 (AL)

Used when mounting as parallel arm with regular main arm.




How to Order 700 Series:

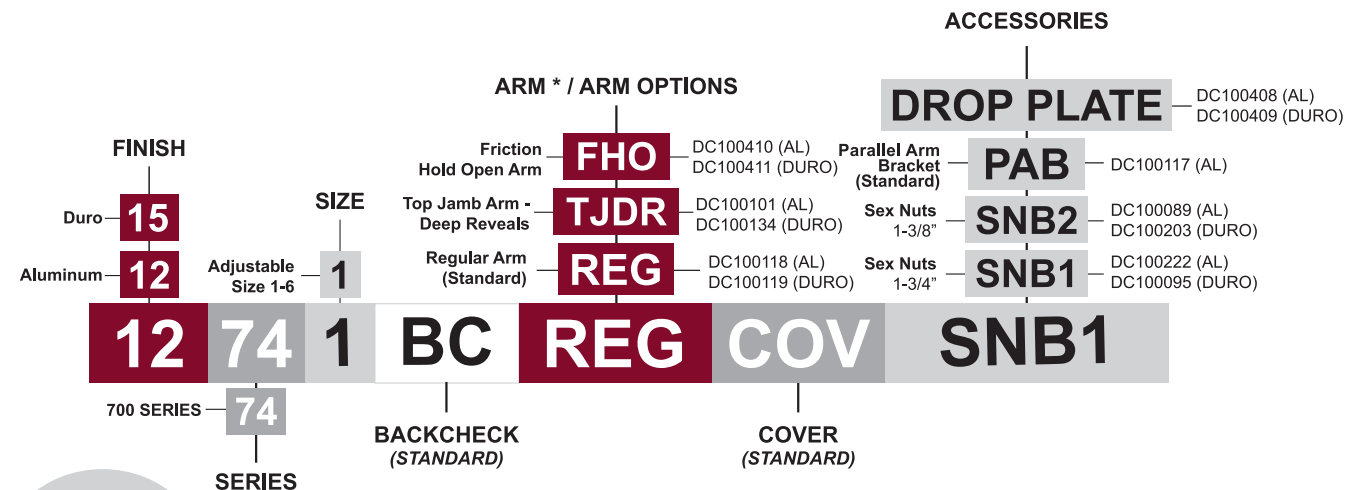

* **TRI-PACK, STANDARD=**
Regular Arm,
Top Jamb Arm 0-3",
Parallel Arm
Bracket

800 SERIES

Heavy-Duty Commercial Grade 1 Surface Applied Closers

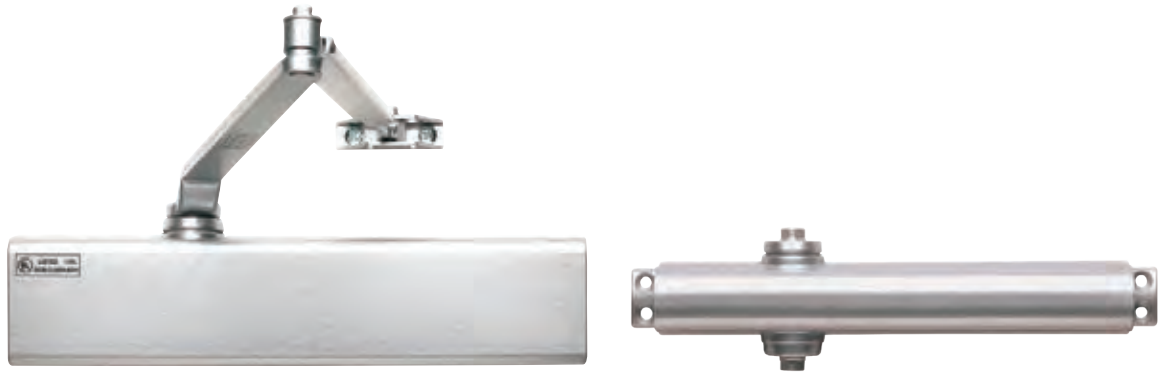


Standard Features

- **Performance** Complies with ANSI A156.4, Grade 1, 2 million cycles, UL/ULC listed up to 3 hours fire rated
- **Chassis/Closer** Cast aluminum
- **Handing** Non-handed
- **Mounting** **TRI-PACK** — regular, top jamb and parallel arm applications.
- **Main Arm** Stamped steel, accommodates reveals up to 3 1/4", adjustable extension arm
- **Spring Power** Spring power adjustable size 1 - 6 standard for interior and exterior applications
- **Backcheck** Adjustable, hydraulic - providing cushioning and preventing uncontrolled openings of the door
- **Valves** Adjustable, independent, non-critical (sweep and latch), consistent closing speeds
- **Fasteners** Metal screws included for hollow metal and aluminum mounting applications. Wood screws included for wood door mounting applications. Closers are packed with thru-bolts.
- **Door Range** Up to 180 degrees
- **Door Preparation** 12" horizontal and 3/4" vertical mounting hole locations (retrofits traditional closer)
- **Cover** High impact plastic streamlined cover
- **Warranty** 25 year limited

800 Series Application Drawings:

Regular Hinge (Pull) Side Mounting

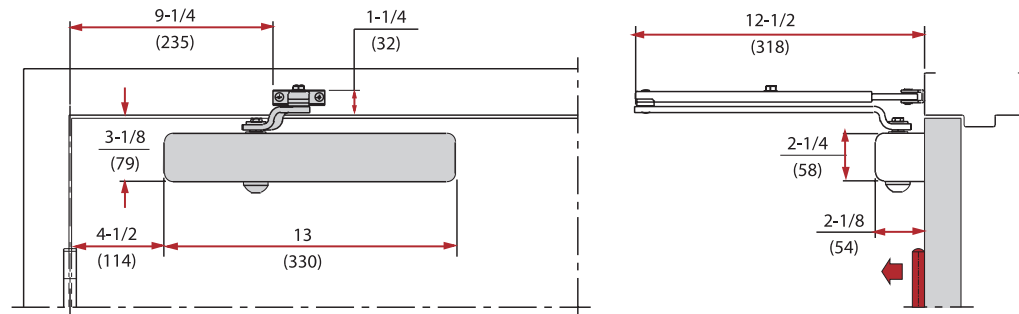

4-1/2" x 4-1/2" Butt Hinges

Minimum door rail for mounting closer 2-1/2".
Minimum door rail to bottom of slim plastic cover 2-5/8".
Minimum door rail to bottom of optional full cover 3-5/8".
Backcheck positioning valve in "OFF" position.

**MAXIMUM
OPENING**

180°

**APPROX
BACKCHECK***


65°-180°

**APPROX.
DELAYED
ACTION**

180°-65°

*Backcheck is advanced approximately 15° with positioning valve on.

Regular Hold Open Arm

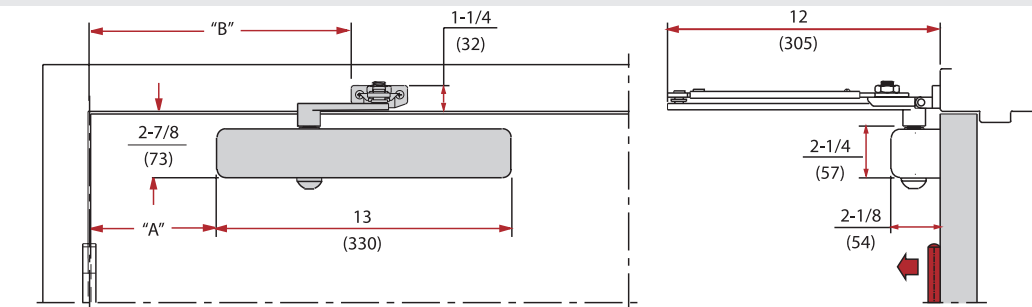

4-1/2" x 4-1/2" Butt Hinges

Minimum door rail for mounting closer 2-5/8".
Minimum door rail to bottom of slim plastic cover 2-3/4".


Minimum door rail to bottom of optional full cover 3-3/4".
Backcheck positioning valve in "OFF" position.

TEMPLATE REFERENCE	DIM "A"	DIM "B"	APPROX. MAXIMUM OPENING	APPROX. BACKCHECK*	APPROX. DELAYED ACTION	MINIMUM HOLD OPEN	MAXIMUM HOLD OPEN
TO 100°	7" (178)	12-3/8" (321)	110°	65°-110°	110°-65°	80°	110°
100°-120°	6" (152)	11-5/8" (295)	125°	70°-125°	125°-70°	90°	125°
OVER 120°	3-1/2" (89)	9-1/8" (232)	180°	85°-180°	180°-85°	100°	165°

*Backcheck is advanced approximately 15° with positioning valve on.

800 Series Application Drawings:


Top Jamb (Push Side) Mounting

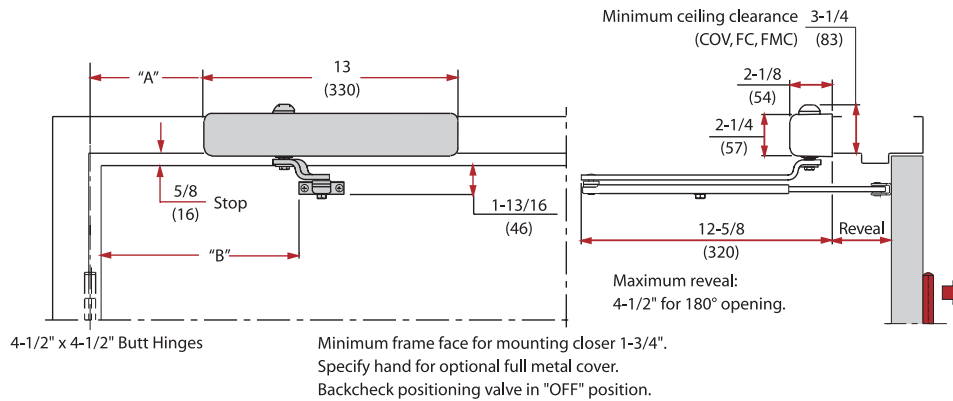

TEMPLATE REFERENCE	DIM "A"	DIM "B"	REVEAL	ARM	APPROX. MAXIMUM OPENING	APPROX. BACKCHECK*	APPROX. DELAYED ACTION
TO 180°	4-1/2" (114)	9-1/4" (235)	0"	AF AR	180°	70°-180°	180°-70°
TO 180°	4-1/2" (114)	9-1/4" (235)	4"	AF AR	180°	75°-180°	180°-75°
TO 180°	4-1/2" (114)	9-1/4" (235)	4"	AFJ ARJ	180°	75°-180°	180°-75°
TO 180°	4-1/2" (114)	9-1/4" (235)	8"	AFJ ARJ	165°	80°-165°	165°-80°

*Backcheck is advanced approximately 15° with positioning valve on.

Heavy-Duty Parallel Arm With Dead Stop

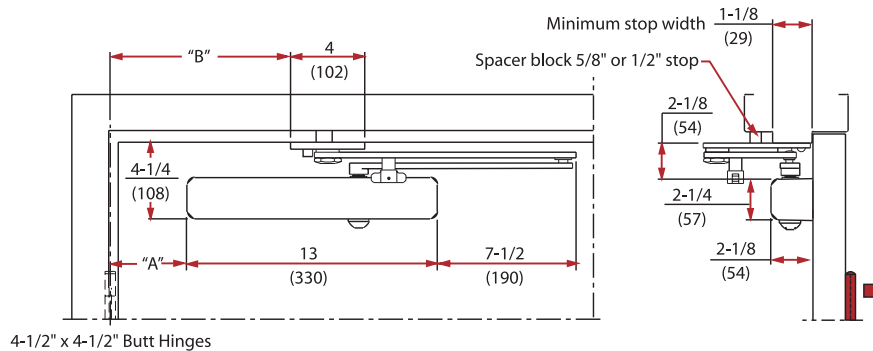

4-1/2" x 4-1/2" Butt Hinges

Minimum door rail for mounting closer 4-5/8"*

Minimum door rail to bottom of slim plastic cover 4-3/4"*

Minimum door rail to bottom of optional full cover 5-3/4"*


Backcheck positioning valve in "ON" position.

* Based on 5/8" stop.

TEMPLATE REFERENCE	DIM "A"	DIM "B"	APPROX. MAXIMUM OPENING	APPROX. BACKCHECK*	APPROX. DELAYED ACTION	MINIMUM HOLD OPEN
85°	4-5/8" (117)	10-5/8" (270)	85°	50°-85°	85°-65°	26"
90°	3-7/8" (98)	9-3/4" (248)	90°	55°-90°	90°-70°	25"
100°	3-5/8" (57)	8-5/8" (219)	100°	60°-100°	100°-75°	24"
110°	1-1/2" (38)	7-1/2" (191)	110°	65°-110°	110°-80°	23"


800 Series Application Drawings:

Parallel Arm (Push Side) Mounting

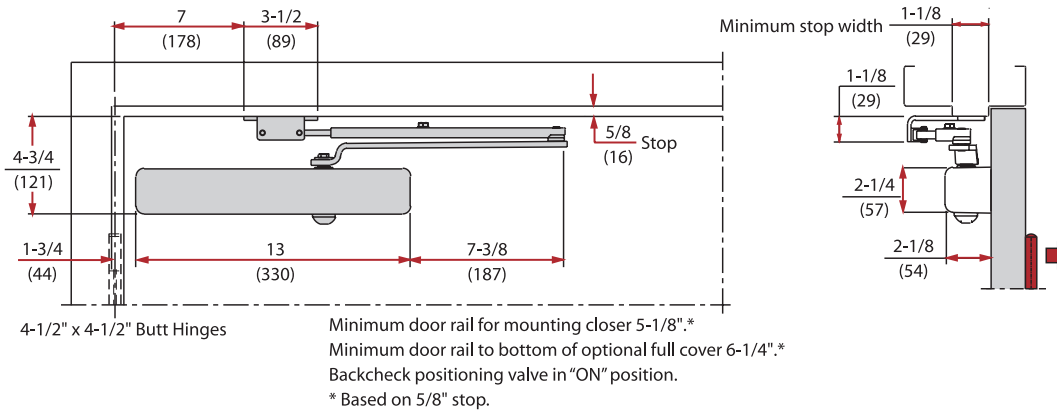

MAXIMUM OPENING	APPROX BACKCHECK	APPROX. DELAYED ACTION	MINIMUM DOOR WIDTH
180°	60°-180°	180°-75°	24"


Parallel Hold Open Arm

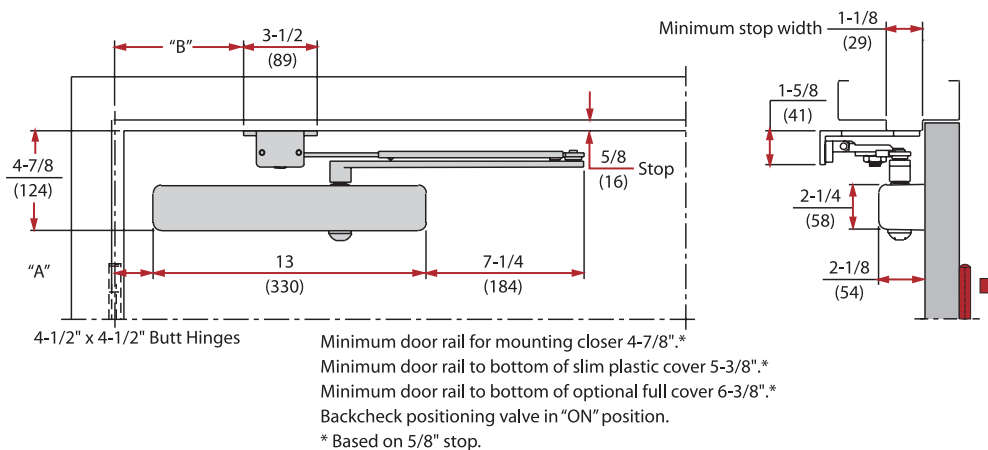

TEMPLATE REFERENCE	DIM "A"	DIM "B"	APPROX. MAXIMUM OPENING	APPROX. BACKCHECK RANGE	APPROX. DELAYED ACTION	MIN. HOLD OPEN	MAX. HOLD OPEN	MIN. DOOR WIDTH
TO 100°	3-5/8"	9"	110°	65°-110° (92)	110°-80° (228)	45°	105°	29"
OVER 100°	1-1/2" (38)	6-1/2" (165)	180°	80°-180°	180°-95°	45°	175°	24"

800 Series Application Drawings:

Top Jamb Hold Open Arm

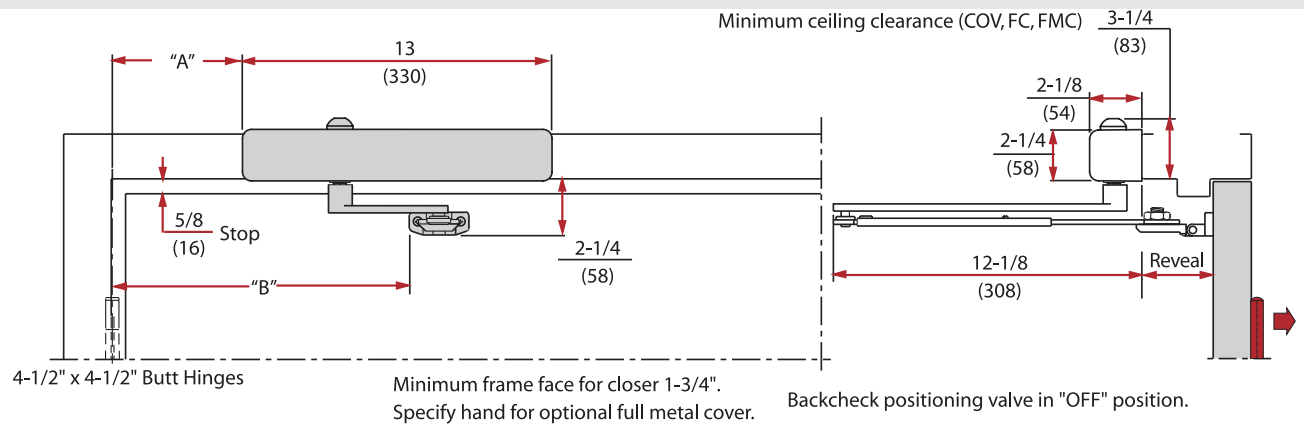

TEMPLATE REFERENCE	DIM "A"	DIM "B"	REVEAL	ARM	APPROX. MAXIMUM OPENING	APPROX. BACKCHECK*	APPROX. DELAYED ACTION RANGE	MIN. HOLD OPEN	MAX. HOLD OPEN
TO 100°	7-1/2" (190)	13-1/8" (333)	0"	FH	110°	70°-110°	110°-70°	70°	105°
			4"	FH	105°	75°-105°	105° - 75°	70°	100°
			4"	FHJ	105°	75°-105°	105° - 75°	70°	100°
			8"	FHJ	100°	80°-100°	110° - 80°	70°	95°
TO 120°	6" (152)	11-5/8" (295)	0"	FH	125°	75°-125°	75°-125°	75°	120°
			4"	FH	120°	80°-120°	120° - 80°	75°	115°
			4"	FHJ	120°	80°-120°	120° - 80°	75°	115°
			8"	FHJ	115°	85°-115°	115° - 85°	75°	110°
OVER 120°	3-1/2" (89)	9-1/8" (232)	0"	FH	180°	85°-180°	180° - 85°	80°	170°
			4"	FH	180°	90°-180°	180° - 90°	80°	170°
			4"	FHJ	180°	90°-180°	180° - 90°	80°	170°
			8"	FHJ	165°	100°-165°	165° - 100°	85°	155°

*Backcheck is advanced approximately 15° with positioning valve on.

800 Series Arm Options:

Regular Arm, (Standard)


DC100279 (AL)

Complete arm assembly with forged steel main arm, full articulating adjusting arm and 10mm threaded rod and shoe to accommodate 0" to 3-1/4" inch reveals.



Dead Stop Arm (DS)

DC100285 (AL)

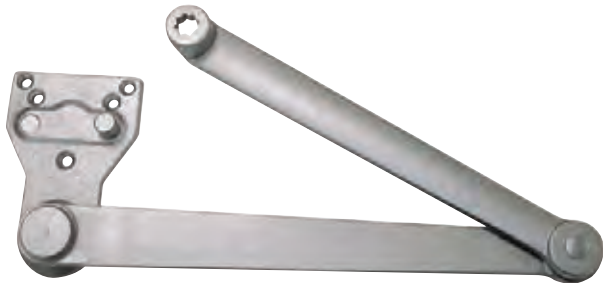

Super Parallel Hold Open Arm (SPH)

DC100282 (AL)



800 Series Cover:

Full Plastic Cover, (Standard)

DC100288

High impact full plastic cover, non-handed.



800 Series Accessories:

Sex Nuts:

SNB1

DC100222 (AL)

DC100095 (Duro)

DC100096 (Gold)

SNB1 — Sex nuts with machine screws for 1-3/4" (44 mm) door.

SNB2

DC100089 (AL)

DC100203 (Duro)

SNB2 — Sex nuts with machine screws for 1-3/8" (35 mm) door.



Drop Plate / DC100245 (AL)

For top jamb mount when overhead ceiling clearance is less than 1-7/8" or to provide clearance for overhead holder. Also permits parallel arm installation on doors with a minimum top rail of 2-1/2".



Parallel Arm Bracket, (PAB) (Standard)

DC100117 (AL)

DC100192 (Duro)

DC100216 (Gold)

Used when mounting as parallel arm with regular main arm.



800 Series Cross Reference:

TELL	CAL-ROYAL	DORMA	DOR-O-MATIC	INTERNATIONAL	LCN	NORTON	PARKER	SENTINEL	YALE	SARGENT
816	801S*	8616	SC80/SC81	9000	1460	8000	900BC	2500	3000*	1430
										1431

NOTE: This chart has been prepared by comparing functions of door closers. Since no products are exactly alike, the data on this chart represents our judgment of which products are most similar. Because information has been obtained from trade sources, it is not guaranteed nor represented that any specific product exactly equals any other product.

* RETROFIT INSTALLATION HOLE FOR HOLE

800 Series Door Sizing Chart:


Door Sizing Chart	D O O R W I D T H							
		2'-0" min.	2'-6" max.	3'-0" max.	3'-6" max.	4'-0" max.	4'-6" max.	5'-0" max.
CLOSER 816 Regular & Top Jamb								
	Interior	✓	✓	⚠	✓	✓	✓	✓
	Exterior	✓	✓	⚠	✓	✓	✓	N/A
	816							
	PA							
	Interior	✓	✓	⚠	✓	✓	✓	N/A
	Exterior	✓	✓	⚠	✓	✓	N/A	N/A

✓ = Recommended

N/A = Not applicable or recommended


⚠ = Opening force 5 lbs. on interior and 8.5 lbs. on exterior doors

How to Order 800 Series:

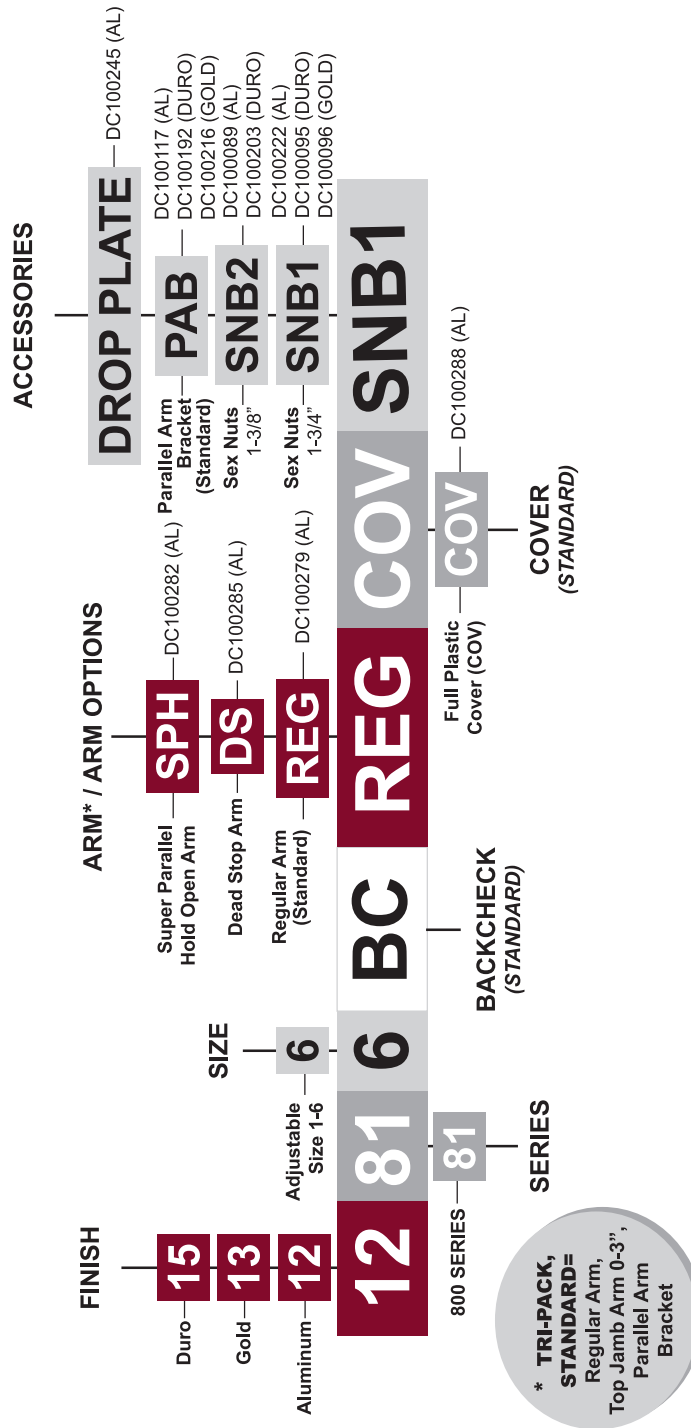

900 SERIES

Heavy-Duty Commercial Grade 1 Surface Applied Closers

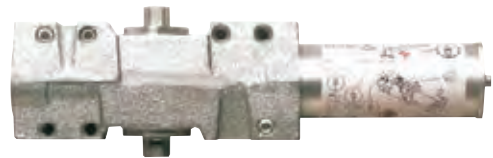

Standard Features


- **Performance** Complies with ANSI A156.4, Grade 1, 2 million cycles, UL/ULC listed up to 3 hours fire rated
- **Chassis/Closer** Cast steel
- **Handing** Non-handed
- **Mounting** **TRI-PACK** — regular, top jamb and parallel arm applications.
- **Main Arm** Forged steel, accommodates reveals up to 3 1/4", adjustable extension arm
- **Spring Power** Adjustable 1 - 6 sizes
- **Backcheck** Adjustable, hydraulic - providing cushioning and preventing uncontrolled openings of the door
- **Valves** Adjustable, independent, non-critical (sweep and latch), consistent closing speeds
- **Fasteners** Metal screws included for hollow metal and aluminum mounting applications. Wood screws included for wood door mounting applications. Closers are packed with thru-bolts.
- **Door Range** Up to 180 degrees
- **Door Preparation** 5" horizontal and 2-1/4" vertical mounting hole locations (retrofits traditional closer)
- **Warranty** 25 year limited

Optional Features

- **Covers** High impact plastic and plated kit: cover, arm & bracket
- **Other Features** Refer to Arm Option and Accessories pages for more optional features


900 Series Application Drawings:

Parallel Arm (Push Side) Mounting

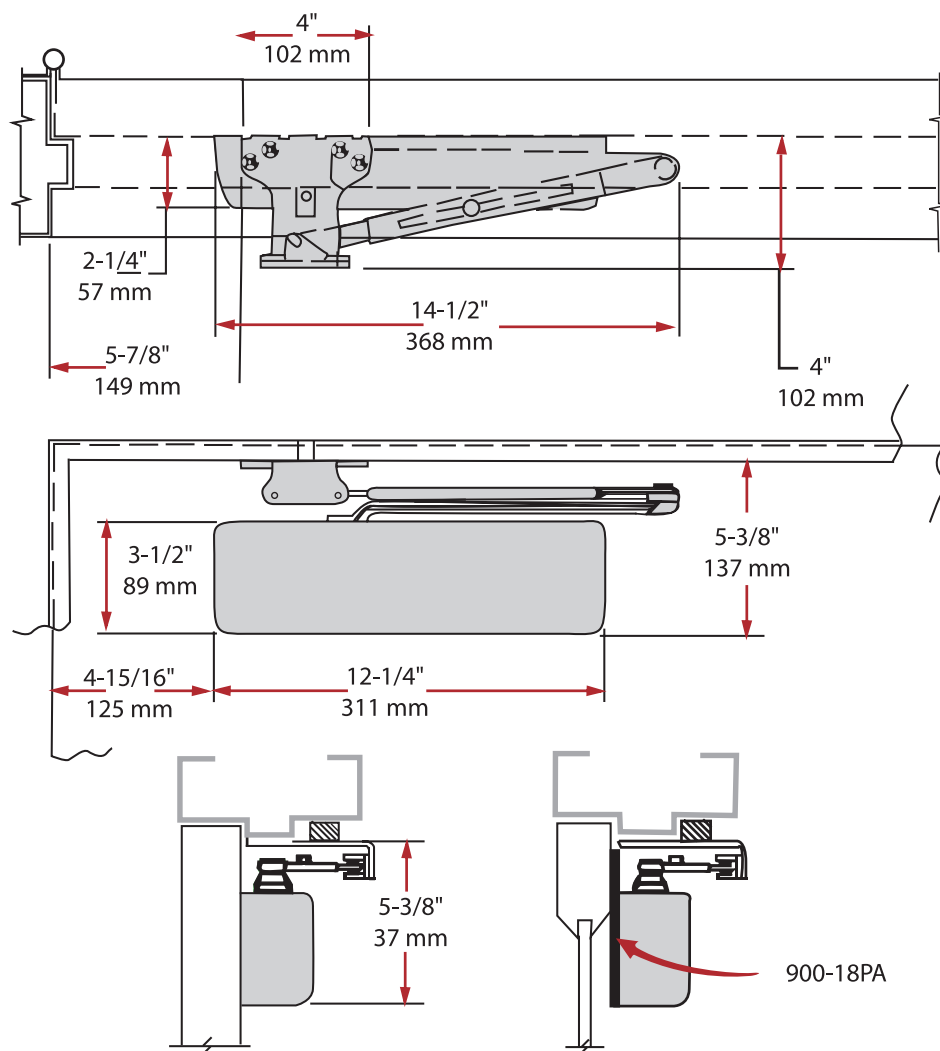


900 Series Application Drawings:

Top Jamb (Push Side) Mounting

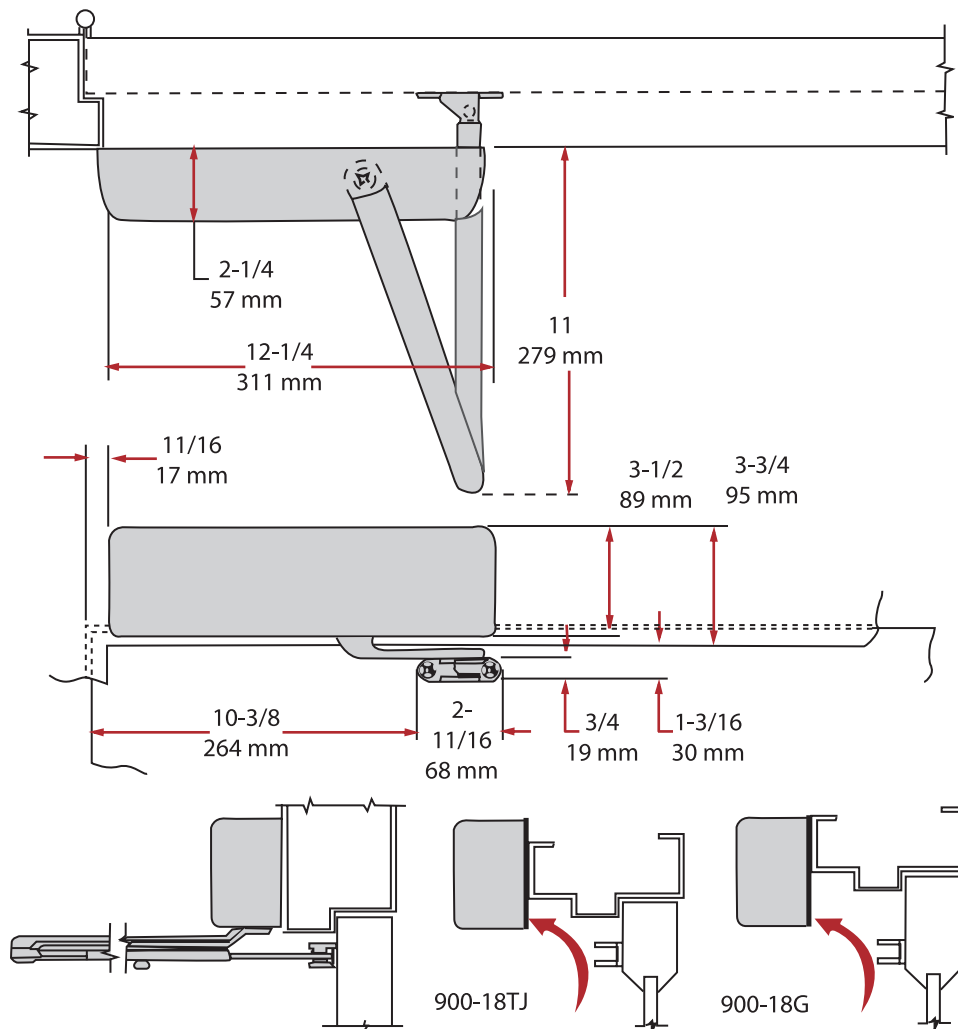

900 Series Application Drawings:

Regular (Pull Side) Mounting

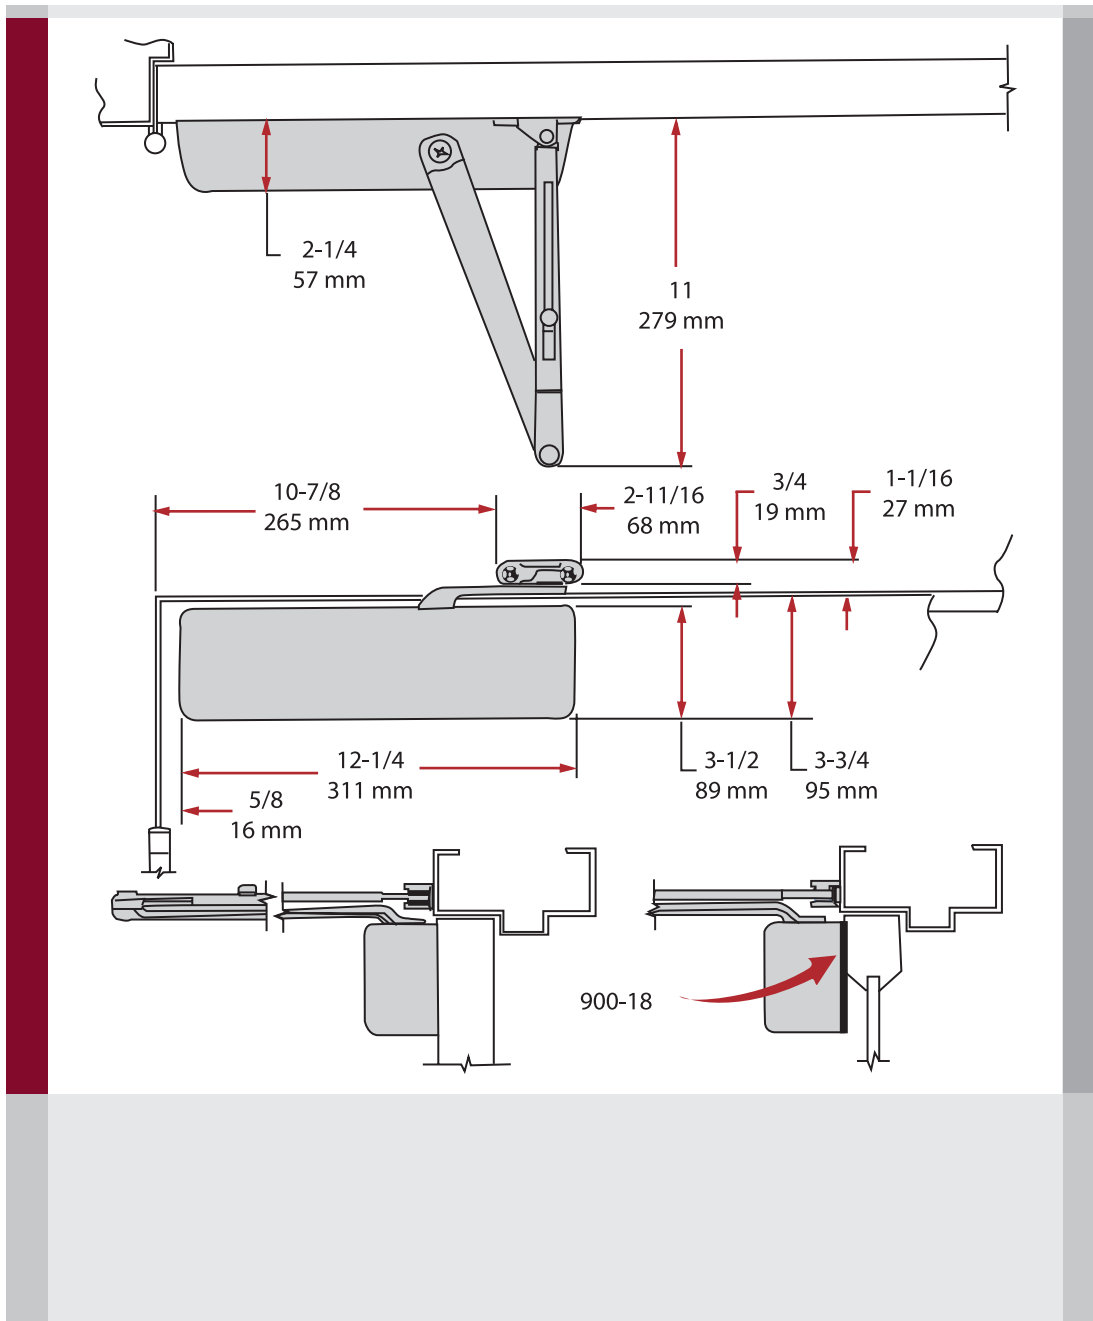

900 Series Standard Feature:

Cover, (Standard)

DC100257 (AL)

Standard, non-handed high impact plastic cover.
Available for all painted finishes.



900 Series Arm Options:

Regular Arm, (Standard)

DC100191 (AL)

DC100212 (Duro)

Non-handed arm used to mount for regular, top jamb and with parallel arm bracket. Solid steel forged main arm with slide connecting arm to handle reveals up to 3-1/4" inches.



Hold Open Arm, (HO)

DC100138 (AL)

DC100139 (Duro)

Optional, non-handed hold open arm and can be mounted regular, top jamb and parallel arm*.

*PA bracket optional



Heavy Duty Parallel Arm, (SP)

DC100124 (AL)

DC100144 (Duro)

Optional, non-handed heavy-duty parallel arm features forged steel main arm and forearm for abusive conditions.



NOTE: AL=Aluminum, Duro=Duranodic

900 Series Arm Options:

Dead Stop Arm, (DS)

DC100193 (AL)

Optional, non-handed heavy-duty parallel arm features forged steel main arm and forearm with positive dead stop built into soffit plate.



Heavy Duty Dead Stop Hold Open Arm, (DSH)

DC100181 (AL)

DC100190 (Duro)

Optional, handed hold open heavy duty parallel arm features forged steel main arm and forearm with positive dead stop built into soffit plate.



900 Series Options:

Plated Kit

DC100184 (US3)

DC100185 (US26)

DC100200 (US26D)

Optional Plated Kit includes non-handed full metal cover, regular arm, parallel arm bracket and all fasteners in matching plated finish



NOTE: AL=Aluminum, Duro=Duranodic, US26=Bright Chrome, US26D=Satin Chrome

900 Series Accessories:

Regular Mount Plate

DC100141 (AL)

DC100140 (Duro)

Optional drop plate to mount closer parallel arm where top rail of door is less than 5-1/2" measured from the stop. Minimum top rail on door of 2" required.



DC100142 (Duro)

Optional drop plate to mount closer parallel arm where top rail of door is less than 5-1/2" measured from the stop. Minimum top rail on door of 2" required.



Drop Plate

DC100210 (AL)

DC100227 (Duro)

Optional drop plate to mount closer on top jamb application where ceiling is flush with top of frame. Requires minimum 1-3/4" frame face.



Friction Hold Open "L" Bracket, (FHO)

DC100225 (AL)

Used when mounting parallel arm or friction hold open (FHO) arm.



Sex Nuts:

SNB1

DC100222 (AL)

DC100095 (Duro)

SNB1 — Sex nuts with machine screws for 1-3/4" (44 mm) door.

SNB2

DC100089 (AL)

DC100203 (Duro)

SNB2 — Sex nuts with machine screws for 1-3/8 (35 mm) door.






900 Series Cross Reference Chart:

TELL	CAL-ROYAL	DORMA	LCN	NORTON	SARGENT	YALE
900	CR441*	8916 AF	4040*	7500	281	4400

NOTE: This chart has been prepared by comparing functions of door closers. Since no products are exactly alike, the data on this chart represents our judgement of which products are most similar. Because information has been obtained from trade sources, it is not guaranteed nor represented that any specific product exactly equals any other product.

* RETROFIT INSTALLATION HOLE FOR HOLE

900 Series Door Sizing Chart:


Door Sizing Chart	D O O R W I D T H						
	24" min. 610mm	30" max. 762mm	36" max. 914mm	42" max. 1067mm	48" max. 1219mm	54" max. 1372mm	60" max. 1523mm
CLOSER							
900	Interior	✓	✓			✓	✓
	Exterior	✓	✓		✓	✓	N/A

✓ = Recommended

N/A = Not applicable or recommended

 = Opening force 5 lbs. on interior and 8.5 lbs. on exterior doors

How to Order 900 Series:

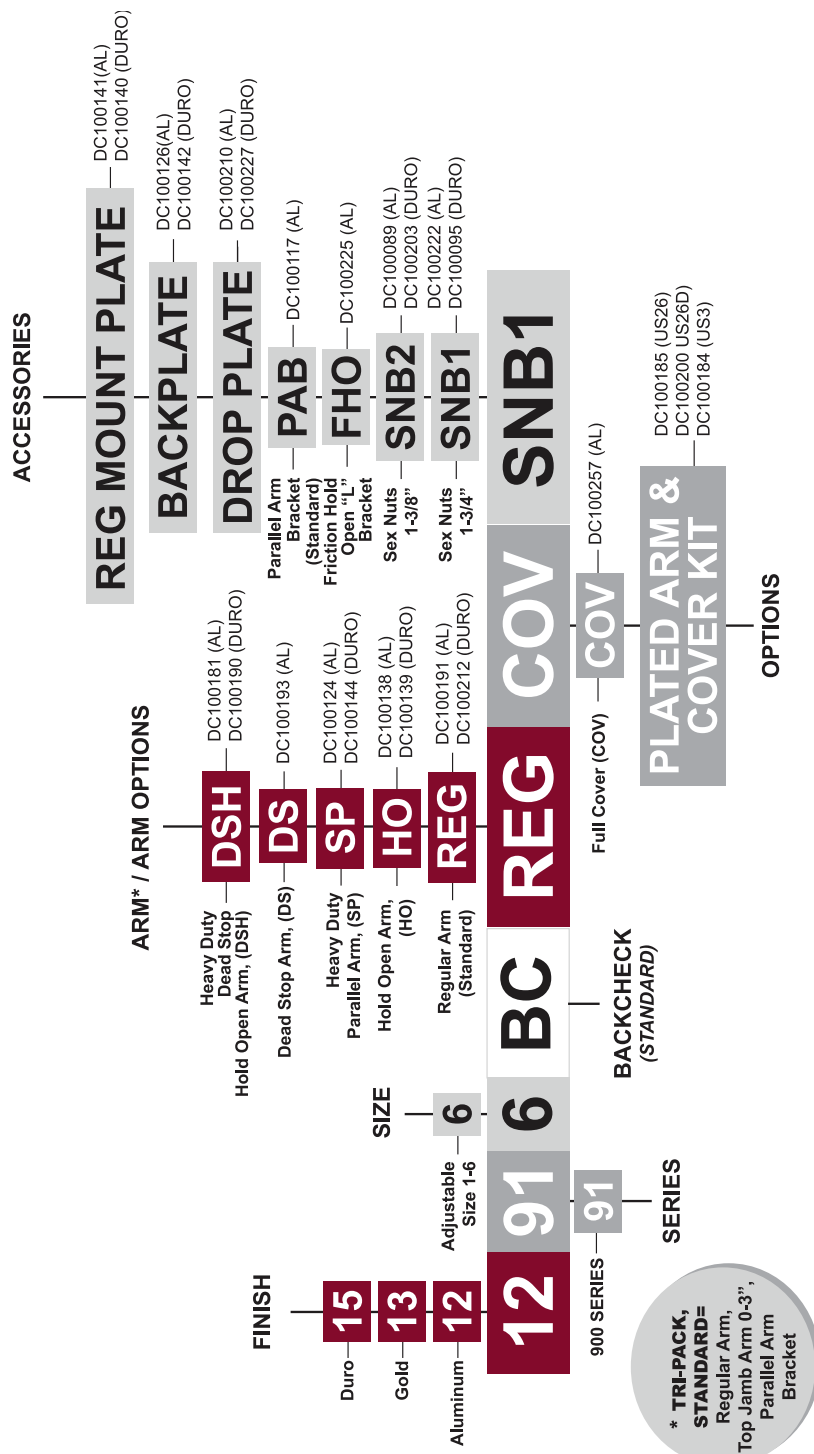

1000 SERIES Residential Closer

1000 Series (Brown)



1000 Series (Ivory)



2000 SERIES Light Commercial Residential Closer

2000 Series (Brown)



2000 Series (Ivory)



1000 Series Standard Features:

- **Chassis/Closer** Non-handed, size 1 only, fits doors 24" to 30" wide, weighing 30 to 65 pounds.
- **Valves** Adjustable closing speed
- **Finishes** Two painted finishes, ivory and brown
- **Arm** Friction Hold Open (FHO) available on select models

2000 Series Standard Features:

- **Chassis/Closer** Non-handed, size 3 only, fits doors 34" to 38" wide, weighing 85 to 120 pounds.
- **Valves** Adjustable closing speed
- **Finishes** Two painted finishes, ivory and brown
- **Arm** Friction Hold Open (FHO) available on select models

How to Order 1000/2000 Series:

PART NO.	DESCRIPTION	COLOR	ARM FEATURES	APPLICATION
1000 SERIES:				
DC100082	11186	Ivory	FRICTION HOLD OPEN (FHO)	Standard / Parallel
DC100080	11184	Brown	FRICTION HOLD OPEN (FHO)	Standard / Parallel
DC100079	10175	Brown	—	Standard / Parallel
DC100081	10173	Ivory	—	Standard / Parallel
2000 SERIES:				
DC100077	20675	Brown	FRICTION HOLD OPEN (FHO)	Top Jamb / Standard
DC100078	20673	Ivory	FRICTION HOLD OPEN (FHO)	Top Jamb / Standard
DC100083	20375	Brown	—	Top Jamb / Standard
DC100084	20373	Ivory	—	Top Jamb / Standard

NOTE: Please check application before purchase to ensure proper fit.

Exit Devices
Red Tab

Exit Devices
Red Tab back

COMMERCIAL DOORS & HARDWARE

table of contents

EXIT DEVICES

	PAGE
7300 Rim Exit Device	1
7400 Series Surface Vertical Rod	5
8300 Rim Exit Device	9
8300 Series with Alarm	10
8400 Series Surface Vertical Rod	15
9500 Series Rim Exit Device	19
9400 Series Surface Vertical Rod	23
9100 Series Mortise Lock Exit Device	27



7300 SERIES

Commercial Duty Grade 1 Rim Exit Devices



Standard Features

- **Performance** Complies with ANSI A156.3, 1994, Grade 1, UL/ULC listed
- **Rail** Fits 28" to 36" doors
- **Latch** Stainless steel 5/8" throw
- **Backset** 2-3/4"
- **Strike** Adjustable with slotted holes for adjustments
- **Standard Cylinder** Standard cylinder Schlage (SCC) - 6-pin solid brass, C keyway, keyed different (KD).
- **Fasteners** Accommodates wood or metal doors
- **Door Range** 1-3/4" to 2" thickness
- **Door Preparation** Surface mounted
- **Warranty** 10 year limited

Optional Features

- **Exterior Trim** Exterior blank pull, exterior pull with cylinder cut out, entry ball knob trim, storeroom ball knob trim, entry lever trim without clutch, exterior thumbpiece trim, pull trim with rim cylinder, exterior escutcheon lever trim, heavy-duty escutcheon entry lever trim
- **UL Listed** 3 hour fire rated device available
- **Fire Rated** UL labeled fire rated device available for use on doors rated up to 3 hours. Fire rated device also available for larger doors up to a maximum of 4' x 8'. Specify when ordering.
- **Strikes** Other strikes available

Keying Options for Select Knob and Lever Trim

- **Tell Cylinder** Restricted Tell keyway cylinder can key both the cylinder and interchangeable core in one lock. The cylinders and IC cores are interchangeable. Tell keyway cylinder is available **only** keyed to 6-pin. Tell IC cylinder can be keyed to 6-pin or 7-pin interchangeable core (IC).
- **Other Cylinder Options** Arrow A (ARA), Corbin 59A1 (C059A1), Corbin 60 (C06), Corbin Russwin L4 (CL4), Kwikset (KW1), Russwin D1 (RD1), Sargent LA (SAL), Schlage E (SCE), Schlage F (SCF), Weiser E (WRE), Yale 8 (YA8), Yale GA (YGA)
ALL CYLINDERS 6-PIN. CAN ALSO BE PINNED 5-PIN.
- **IC Keyway Cylinder** Tell, Best A (BA), Best B (BB), Best C (BC), Best D (BD), Best E (BE), Best F (BF), Best G (BG), Best H (BH), Best J (BJ), Best K (BK), Best L (BL), Best M (BM), Best Q (BQ), Best
AVAILABLE 6- OR 7-PIN
- **Keying Options** Grand master key (GMK), construction master key (CMK), master key (MK), keyed different (KD), keyed alike (KA), interchangeable core uncombined (IC), 0-bitted (OBT)

7300 Series Accessories

Non-Restricted Keyway

FOR KNOB TRIM (EMP), LEVER TRIM (CTL)

CL100219 —
Cylinder, Schlage C, US26D

CL100584 —
Cylinder, Schlage C, US4
Standard brass 6-pin cylinder
SCC keyway, optional keyways
available, (see price list).




CL100268 —
IC Core Best A 6 Pin, US26D

CL100270 —
IC Core Best A 7 Pin, US26D

CL100269 —
IC Core Best A 6 Pin, US4

CL100271 —
IC Core Best A 7 Pin, US4
Small format interchangeable core
brass cylinder 6-pin standard, 7-pin
available. Best "A" keyway standard.



416 Strike

Standard strike for rim
7300. Slotted holes for
easy adjustment. Black
powder coated finish.



Glass Shim Plate

EX100050

Shim plate standard 1/8"



Tell Restricted Keyway

FOR LEVER TRIM (CTL), THUMBPIECE TRIM (TP81), ESCUTCHEON LEVER TRIM (ESC), HEAVY-DUTY ESCUTCHEON ENTRY LEVER TRIM (ESCHD), PULL TRIM (PT881)



TELL CYLINDERS:

CL101503 —
6 pin Tell cylinder, US26D

CL101504 —
6 pin Tell cylinder, US4



TELL INTERCHANGEABLE CORES:

CL101499 —
6 pin Tell IC core, US26D

CL101500 —
6 pin Tell IC core, US4

CL101501 —
7 pin Tell IC core, US26D


CL101502 —
7 pin Tell IC core, US4



Overlapping Strike

EX100007 (US32D)

Optional strike used on inactive
door when pairs of doors require rim
7300 on active door.



7300 Series Trim


8PDT

EX100013 (AL)
Exterior blank pull.



8PO3

EX100014 (AL)
Exterior pull with cylinder cut out.



TP81

EX100008 (AL)
Exterior thumbpiece trim, includes 1-1/4" mortise cylinder SCC



EMP808

EX100010 (entry, US32D)

EMP875

EX100011 (passage, US32D)

EMP886

EX100012 (storeroom, US32D)

Exterior sectional ball knob trim.



PT881

EX100090 (AL)
Pull trim with rim cylinder



CTL / Lever Trim (w/out clutch)

EX100005 (entry, US26D)*
EX100006 (passage, US26D)
EX100038 (storeroom, US26D)
Exterior sectional lever trim.



ESC / Escutcheon Trim

EX100054 (entry, US26D)
EX100056 (passage, US26D)
EX100055 (storeroom, US26D)
EX100057 (dummy, US26D)

Exterior escutcheon free wheeling lever trim, includes 1-1/4" mortise cylinder SCC



ESCHD / Escutcheon Trim, Heavy-Duty

EX100303 (entry, US32D)
**-03 Storeroom function available, consult customer service. Requires EX100336 cam.*

Exterior heavy-duty escutcheon free wheeling lever trim, includes 1-1/4" mortise cylinder SCC




**Entry CTL lever trim also available in US3 / Bright Brass / EX100171 Duro / Duronodic / EX100173*

NOTE: AL=Aluminum, US32D=Satin Stainless Steel, US26D=Satin Chrome

How To Order 7300 Series

IC KEYWAY CYLINDER AVAILABLE 6- OR 7-PIN

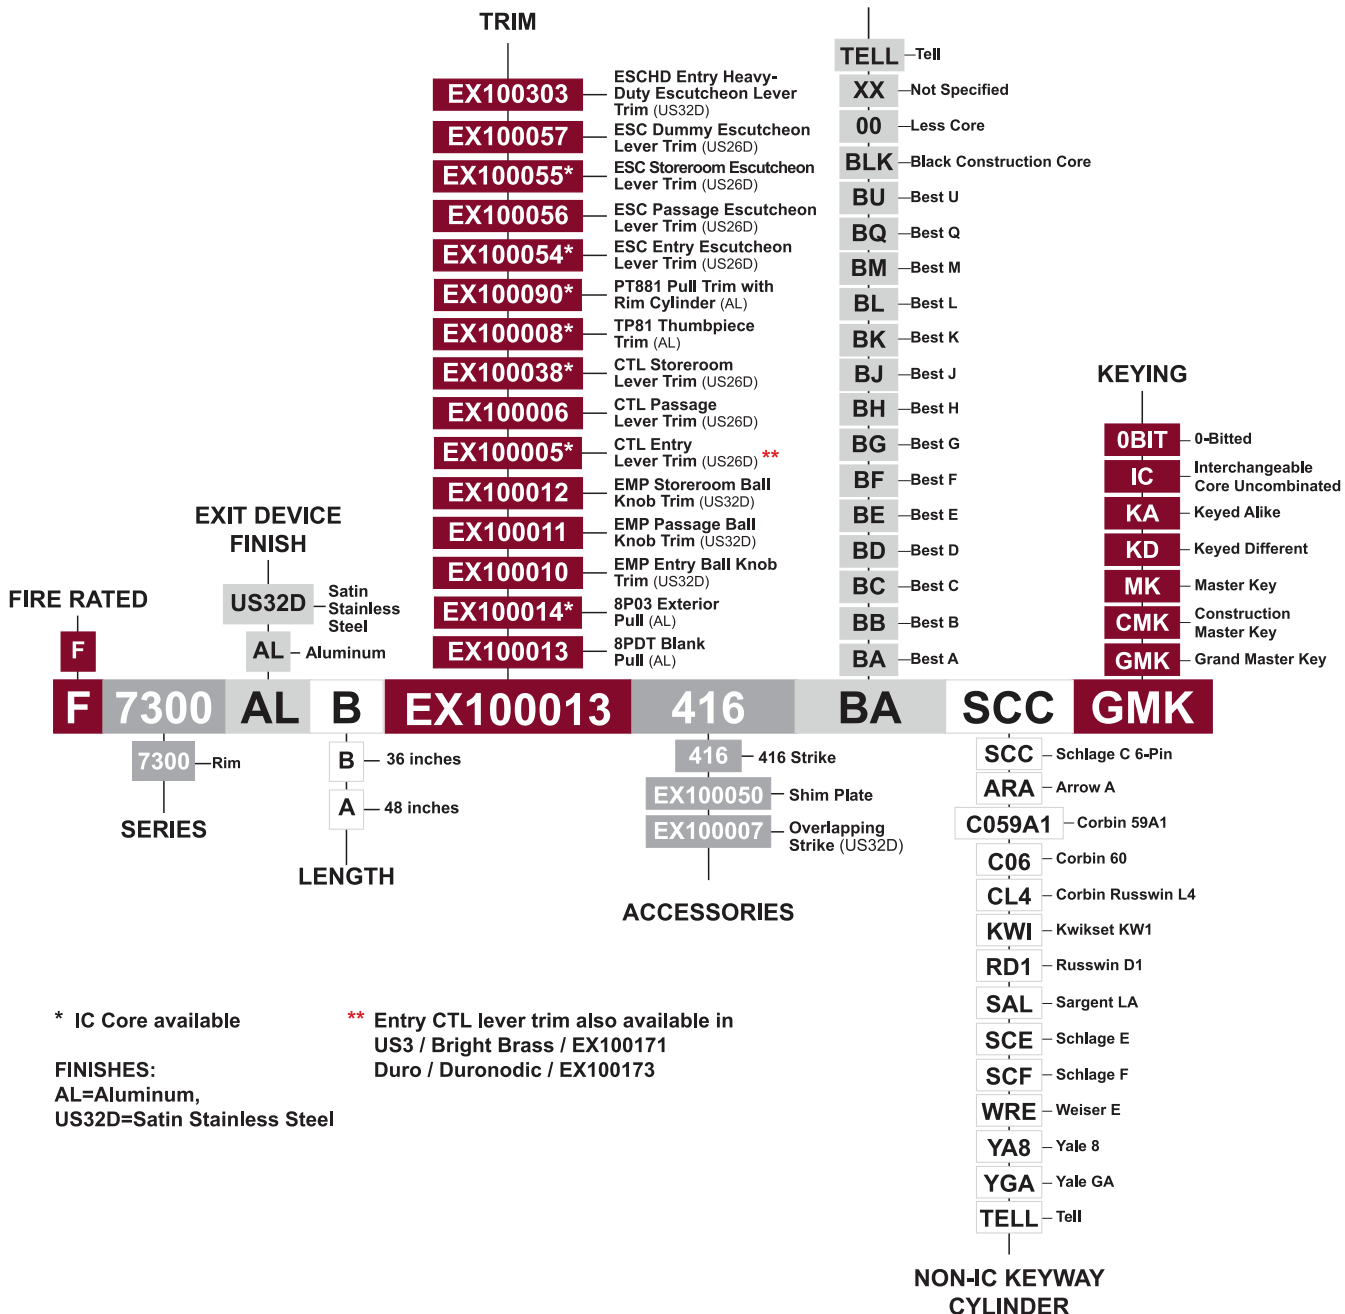

* IC Core available

** Entry CTL lever trim also available in
US3 / Bright Brass / EX100171
Duro / Duronodic / EX100173

FINISHES:

AL=Aluminum,
US32D=Satin Stainless Steel

ALL CYLINDERS AVAILABLE 6-PIN. CAN ALSO BE PINNED 5-PIN.
TELL KEYWAY CYLINDER IS AVAILABLE ONLY KEYED TO 6-PIN.

7400 SERIES

Commercial Surface Grade 1 Vertical Rod Exit Device



Standard Features

- Performance
- Rail
- Latch
- Backset
- Strike
- Standard Cylinder

Complies with ANSI A156.3, 1994, Grade 1, UL/ULC listed
Fits 28" to 36" doors. Easily field sizeable.
Pullman latch bolts top and bottom stainless steel 1/2" throw 2-3/4"
Adjustable with slotted holes for adjustments
Standard cylinder Schlage (SCC) - 6-pin solid brass, C keyway, keyed different (KD).
Accommodates wood or metal doors
1-3/4" to 2" thickness
Surface mounted
10 year limited

- Fasteners
- Door Range
- Door Preparation
- Warranty

Optional Features

- Rail
- Exterior Trim

Models fit 36" or 48" wide doors
Exterior blank pull, exterior pull with cylinder cut out, entry ball knob trim, storeroom ball knob trim, entry lever trim without clutch, exterior thumbpiece trim, pull trim with rim cylinder, exterior escutcheon lever trim, heavy-duty escutcheon entry lever trim

- UL Listed
- Fire Rated

3 hour fire rated device available
UL labeled fire rated device available. Fire rated device also available for larger doors up to a maximum of 4' x 8'. Specify when ordering.

- Strikes

Other strikes available

Keying Options for Select Knob and Lever Trim

- Tell Cylinder

Restricted Tell keyway cylinder can key both the cylinder and interchangeable core in one lock. The cylinders and IC cores are interchangeable. Tell keyway cylinder is available only keyed to 6-pin. Tell IC cylinder can be keyed to 6-pin or 7-pin interchangeable core (IC).

- Other Cylinder Options

Arrow A (ARA), Corbin 59A1 (C059A1), Corbin 60 (C06), Corbin Russwin L4 (CL4), Kwikset (KW1), Russwin D1 (RD1), Sargent LA (SAL), Schlage E (SCE), Schlage F (SCF), Weiser E (WRE), Yale 8 (YA8), Yale GA (YGA)

ALL CYLINDERS 6-PIN. CAN ALSO BE PINNED 5-PIN.

- IC Keyway Cylinder
AVAILABLE 6- OR 7-PIN

Tell, Best A (BA), Best B (BB), Best C (BC), Best D (BD), Best E (BE), Best F (BF), Best G (BG), Best H (BH), Best J (BJ), Best K (BK), Best L (BL), Best M (BM), Best Q (BQ), Best Grand master key (GMK), construction master key (CMK), master key (MK), keyed different (KD), keyed alike (KA), interchangeable core uncombined (IC), 0-bitted (OBIT)

- Keying Options

7400 Series Accessories

Non-Restricted Keyway

**FOR KNOB TRIM (EMP),
LEVER TRIM (CTL)**

CL100219 —
Cylinder, Schlage C, US26D

CL100584 —
Cylinder, Schlage C, US4
Standard brass 6-pin cylinder
SCC keyway, optional keyways
available, (see price list).



CL100268 —
IC Core Best A 6 Pin, US26D

CL100270 —
IC Core Best A 7 Pin, US26D

CL100269 —
IC Core Best A 6 Pin, US4

CL100271 —
IC Core Best A 7 Pin, US4
Small format interchangeable core
brass cylinder 6-pin standard, 7-pin
available. Best "A" keyway standard.



Tell Restricted Keyway

**FOR LEVER TRIM (CTL), THUMBPIECE
TRIM (TP81), ESCUTCHEON LEVER
TRIM (ESC), HEAVY-DUTY ESCUTCHEON
ENTRY LEVER TRIM (ESCHD), PULL TRIM
(PT881)**

TELL CYLINDERS:

CL101503 —
6 pin Tell cylinder, US26D

CL101504 —
6 pin Tell cylinder, US4



TELL INTERCHANGEABLE CORES:

CL101499 —
6 pin Tell IC core, US26D

CL101500 —
6 pin Tell IC core, US4

CL101501 —
7 pin Tell IC core, US26D

CL101502 —
7 pin Tell IC core, US4



7400 Series Trim


8PDT

EX100013 (AL)
Exterior blank pull.



8P03

EX100014 (AL)
Exterior pull with cylinder cut out.



TP81

EX100008 (AL)
Exterior thumbpiece trim, includes 1-1/4" mortise cylinder SCC



EMP808

EX100010 (entry, US32D)

EMP875

EX100011 (passage, US32D)

EMP886

EX100012 (storeroom, US32D)

Exterior sectional ball knob trim.



PT881

EX100090 (AL)
Pull trim with rim cylinder



CTL / Lever Trim (w/out clutch)

EX100005 (entry, US26D)*
EX100006 (passage, US26D)
EX100038 (storeroom, US26D)
Exterior sectional lever trim.



ESC / Escutcheon Trim

EX100054 (entry, US26D)
EX100056 (passage, US26D)
EX100055 (storeroom, US26D)
EX100057 (dummy, US26D)
Exterior escutcheon free wheeling lever trim, includes 1-1/4" mortise cylinder SCC



ESCHD / Escutcheon Trim, Heavy-Duty

EX100303 (entry, US32D)
**-03 Storeroom function available, consult customer service. Requires EX100336 cam.*
Exterior heavy-duty escutcheon free wheeling lever trim, includes 1-1/4" mortise cylinder SCC




**Entry CTL lever trim also available in
US3 / Bright Brass / EX100171
Duro / Duronodic / EX100173*

How To Order 7400 Series

NON-IC KEYWAY CYLINDER

ALL CYLINDERS AVAILABLE 6-PIN. CAN ALSO BE PINNED 5-PIN.
TELL KEYWAY CYLINDER IS AVAILABLE ONLY KEYED TO 6-PIN.

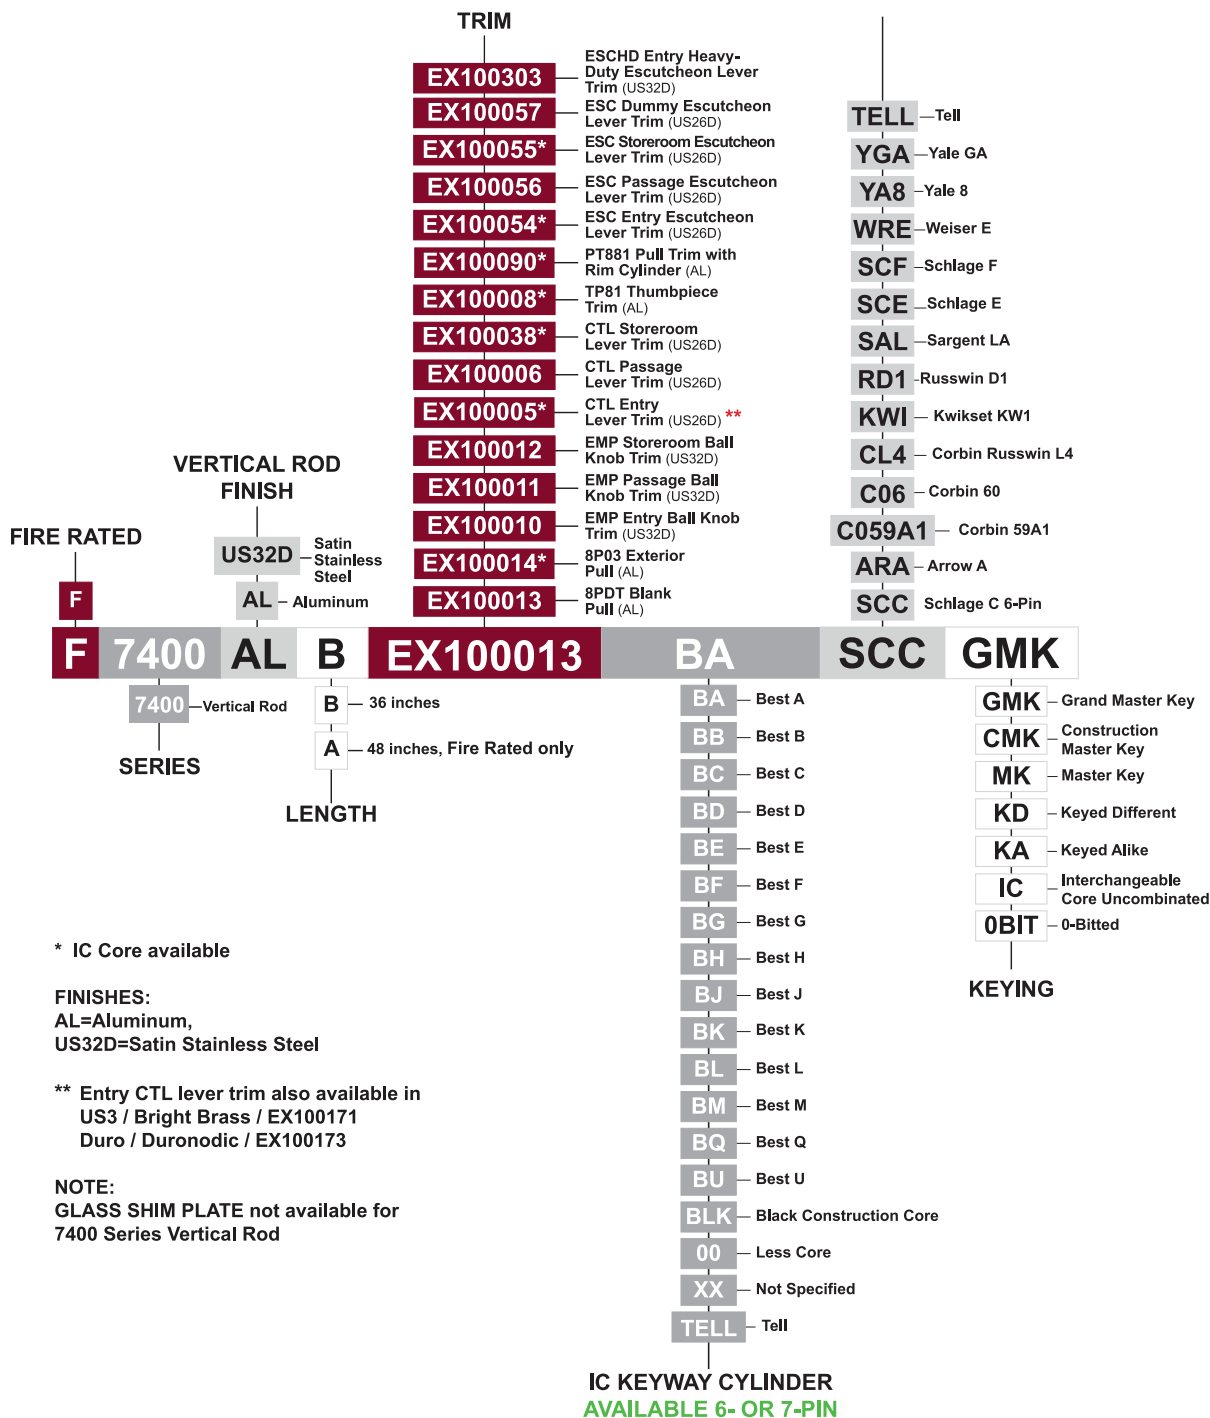

* IC Core available

FINISHES:

AL=Aluminum,
US32D=Satin Stainless Steel

** Entry CTL lever trim also available in

US3 / Bright Brass / EX100171

Duro / Duronodic / EX100173

NOTE:

GLASS SHIM PLATE not available for
7400 Series Vertical Rod

8300 SERIES

Heavy-Duty Commercial Grade 1 Rim Exit Devices



Standard Features

- **Performance** Complies with ANSI A156.3, 1994, Grade 1, UL/ULC listed
- **Rail** Fits 28" to 36" doors
- **Latch** Stainless steel 5/8" throw
- **Backset** 2-3/4"
- **Strike** Adjustable with slotted holes for adjustments
- **Standard Cylinder** Standard cylinder Schlage (SCC) - 6-pin solid brass, C keyway, keyed different (KD).
- **Fasteners** Accommodates wood or metal doors
- **Door Range** 1-3/4" to 2" thickness
- **Door Preparation** Surface mounted
- **Warranty** 10 year limited

Optional Features

- **Exterior Trim** Exterior blank pull, exterior pull with cylinder cut out, entry ball knob trim, storeroom ball knob trim, entry lever trim without clutch, exterior thumbpiece trim, pull trim with rim cylinder, exterior escutcheon lever trim, heavy-duty escutcheon entry lever trim
- **UL Listed** 3 hour fire rated device available
- **Fire Rated** UL labeled fire rated device available for use on doors rated up to 3 hours. Fire rated device also available for larger doors up to a maximum of 4' x 8'. Specify when ordering.
- **Strikes** Other strikes available

Keying Options for Select Knob and Lever Trim

- **Tell Cylinder** Restricted Tell keyway cylinder can key both the cylinder and interchangeable core in one lock. The cylinders and IC cores are interchangeable. Tell keyway cylinder is available **only** keyed to 6-pin. Tell IC cylinder can be keyed to 6-pin or 7-pin interchangeable core (IC).
- **Other Cylinder Options** Arrow A (ARA), Corbin 59A1 (C059A1), Corbin 60 (C06), Corbin Russwin L4 (CL4), Kwikset (KW1), Russwin D1 (RD1), Sargent LA (SAL), Schlage E (SCE), Schlage F (SCF), Weiser E (WRE), Yale 8 (YA8), Yale GA (YGA)
ALL CYLINDERS 6-PIN. CAN ALSO BE PINNED 5-PIN.
- **IC Keyway Cylinder** Tell, Best A (BA), Best B (BB), Best C (BC), Best D (BD), Best E (BE), Best F (BF), Best G (BG), Best H (BH), Best J (BJ), Best K (BK), Best L (BL), Best M (BM), Best Q (BQ), Best
AVAILABLE 6- OR 7-PIN
- **Keying Options** Grand master key (GMK), construction master key (CMK), master key (MK), keyed different (KD), keyed alike (KA), interchangeable core uncombined (IC), 0-bitted (OBIT)

8300 SERIES with ALARM



Standard Features

- **Performance** Complies with ANSI A156.3, 1994, Grade 1
- **Rail** Fits 36" doors ~ * **cannot be cut down.**
- **Latch** Stainless steel 5/8" throw
- **Backset** 2-3/4"
- **Strike** Adjustable with slotted holes for adjustments
- **Standard Cylinder** Standard cylinder Schlage (SCC) - 6-pin solid brass, C keyway, keyed different (KD).
- **Fasteners** Accommodates wood or metal doors
- **Door Range** 1-3/4" to 2" thickness
- **Door Preparation** Surface mounted
- **Warranty** 10 year limited for device; 1 year for electronics

Alarm Features

- **Horn** Alarm unit has an internal horn. When the push rail is depressed, the horn sounds to provide an audible means of signaling that the door has been opened and violated.
- **Cut Off Feature** The unit has changeable 2 minute alarm cutoff or manual reset. It is preset at factory for 2 minute alarm cut off.
- **Jumper Cable** Jumper cable is provided to switch to continuous alarm.
- **Key** The key switch to turn the alarm off is a standard 1 1/4" **mortise cylinder** with "C" keyway. The alarm operates on one standard 9 volt transistor battery. When battery is weak the horn will emit an intermittent signal.
- **Switches** Alarmed units are supplied with two switches. One switch monitors the push rail and the other switch monitors the latchbolt for fool proof security.
- **Decal** Unit includes "Emergency exit only, Alarm will sound" decal for application on door or unit.

Keying Options for Select Knob and Lever Trim

- **Tell Cylinder** Restricted Tell keyway cylinder can key both the cylinder and interchangeable core in one lock. The cylinders and IC cores are interchangeable. Tell keyway cylinder is available **only** keyed to 6-pin. Tell IC cylinder can be keyed to 6-pin or 7-pin interchangeable core (IC).
- **Other Cylinder Options** Arrow A (ARA), Corbin 59A1 (C059A1), Corbin 60 (C06), Corbin Russwin L4 (CL4), Kwikset (KW1), Russwin D1 (RD1), Sargent LA (SAL), Schlage E (SCE), Schlage F (SCF), Weiser E (WRE), Yale 8 (YA8), Yale GA (YGA)
ALL CYLINDERS 6-PIN. CAN ALSO BE PINNED 5-PIN.
- **IC Keyway Cylinder** Tell, Best A (BA), Best B (BB), Best C (BC), Best D (BD), Best E (BE), Best F (BF), Best G (BG), Best H (BH), Best J (BJ), Best K (BK), Best L (BL), Best M (BM), Best Q (BQ), Best
AVAILABLE 6- OR 7-PIN
- **Keying Options** Grand master key (GMK), construction master key (CMK), master key (MK), keyed different (KD), keyed alike (KA), interchangeable core uncombined (IC), 0-bitted (0BIT)

8300 Series Accessories

Non-Restricted Keyway

FOR KNOB TRIM (EMP), LEVER TRIM (CTL)



Tell Restricted Keyway

FOR LEVER TRIM (CTL), THUMBPIECE TRIM (TP81), ESCUTCHEON LEVER TRIM (ESC) HEAVY-DUTY ESCUTCHEON ENTRY LEVER TRIM (ESCHD), PULL TRIM (PT881)

CL100219 —
Cylinder, Schlage C, US26D

CL100584 —
Cylinder, Schlage C, US4
Standard brass 6-pin cylinder
SCC keyway, optional keyways
available, (see price list).




CL100268 —
IC Core Best A 6 Pin, US26D

CL100270 —
IC Core Best A 7 Pin, US26D

CL100269 —
IC Core Best A 6 Pin, US4

CL100271 —
IC Core Best A 7 Pin, US4
Small format interchangeable core
brass cylinder 6-pin standard, 7-pin
available. Best "A" keyway standard.



TELL CYLINDERS:

CL101503 —
6 pin Tell cylinder, US26D

CL101504 —
6 pin Tell cylinder, US4



TELL INTERCHANGEABLE CORES:

CL101499 —
6 pin Tell IC core, US26D

CL101500 —
6 pin Tell IC core, US4

CL101501 —
7 pin Tell IC core, US26D

CL101502 —
7 pin Tell IC core, US4



FINISHES: US26D=Satin Chrome, US4=Satin Brass

8300 Series Trim

8PDT

EX100013 (AL)


Exterior blank pull.



8P03

EX100014 (AL)

Exterior pull with cylinder cut out.



TP81

EX100008 (AL)

Exterior thumbpiece trim, includes 1-1/4" mortise cylinder SCC



EMP808

EX100010 (entry, US32D)

EMP875

EX100011 (passage, US32D)

EMP886

EX100012 (storeroom, US32D)

Exterior sectional ball knob trim.



PT881

EX100090 (AL)

Pull trim with rim cylinder



CTL / Lever Trim (w/out clutch)

EX100005 (entry, US26D)*

EX100006 (passage, US26D)

EX100038 (storeroom, US26D)

Exterior sectional lever trim.



ESC / Escutcheon Trim

EX100054 (entry, US26D)

EX100056 (passage, US26D)

EX100055 (storeroom, US26D)

EX100057 (dummy, US26D)

Exterior escutcheon free wheeling lever trim, includes 1-1/4" mortise cylinder SCC



ESCHD / Escutcheon Trim, Heavy-Duty

EX100303 (entry, US32D)

*-03 Storeroom function available, consult customer service.

Requires EX100336 cam.

Exterior heavy-duty escutcheon free wheeling lever trim, includes 1-1/4" mortise cylinder SCC



*Entry CTL lever trim also available in

US3 / Bright Brass / EX100171

Duro / Duronodic / EX100173

8300 Series Accessories

416 Strike

Standard strike for rim 8300. Slotted holes for easy adjustment. Black powder coated finish.



Glass Shim Plate

EX100050


Shim plate standard 1/8"



Overlapping Strike


EX100007 (US32D)

Optional strike used on inactive door when pairs of doors require rim 8300 on active door.



NOTE: US32D=Satin Stainless Steel

How To Order 8300 Series

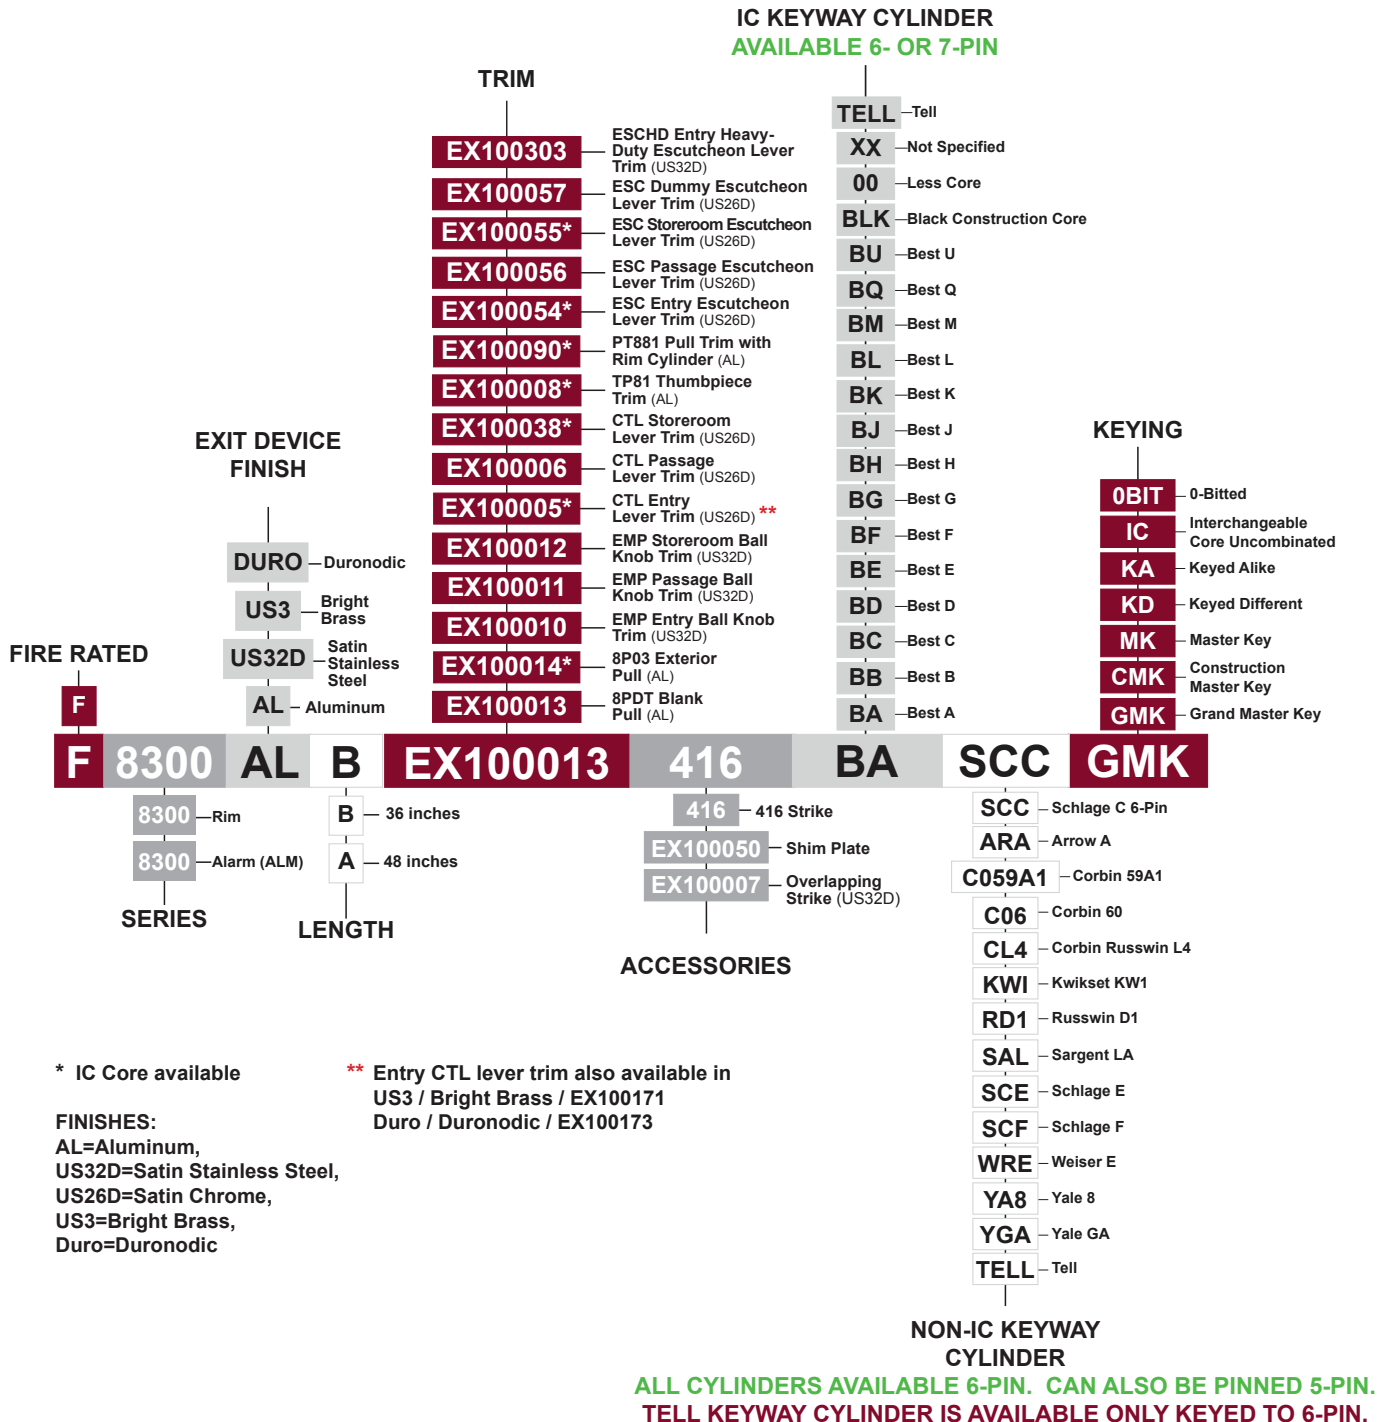

8400 SERIES

Heavy-Duty Commercial Grade 1 Surface Vertical Rod



Standard Features

- **Performance** Complies with ANSI A156.3, 1994, Grade 1, UL/ULC listed
- **Rail** Fits 28" to 36" doors. Easily field sizable.
- **Latch** Pullman latch bolts top and bottom stainless steel 1/2" throw
- **Backset** 2-3/4"
- **Strike** Adjustable with slotted holes for adjustments
- **Standard Cylinder** Standard cylinder Schlage (SCC) - 6-pin solid brass, C keyway, keyed different (KD).
- **Fasteners** Accommodates wood or metal doors
- **Door Range** 1-3/4" to 2" thickness
- **Door Preparation** Surface mounted
- **Warranty** 10 year limited

Optional Features

- **Rail** Fits 48" door, only available fire rated.
- **Exterior Trim** Exterior blank pull, exterior pull with cylinder cut out, entry ball knob trim, storeroom ball knob trim, entry lever trim without clutch, exterior thumbpiece trim, pull trim with rim cylinder, exterior escutcheon lever trim, heavy-duty escutcheon entry lever trim
- **UL Listed** 3 hour fire rated device available
- **Fire Rated** UL labeled fire rated device available for use on doors rated up to 3 hours. Fire rated device also available for larger doors up to a maximum of 4' x 8'. Specify when ordering.
- **Strikes** Other strikes available

Keying Options for Select Knob and Lever Trim

- **Tell Cylinder** Restricted Tell keyway cylinder can key both the cylinder and interchangeable core in one lock. The cylinders and IC cores are interchangeable. Tell keyway cylinder is available only keyed to 6-pin. Tell IC cylinder can be keyed to 6-pin or 7-pin interchangeable core (IC).
- **Other Cylinder Options** Arrow A (ARA), Corbin 59A1 (C059A1), Corbin 60 (C06), Corbin Russwin L4 (CL4), Kwikset (KW1), Russwin D1 (RD1), Sargent LA (SAL), Schlage E (SCE), Schlage F (SCF), Weiser E (WRE), Yale 8 (YA8), Yale GA (YGA)
ALL CYLINDERS 6-PIN. CAN ALSO BE PINNED 5-PIN.
- **IC Keyway Cylinder** Tell, Best A (BA), Best B (BB), Best C (BC), Best D (BD), Best E (BE), Best F (BF), Best G (BG), Best H (BH), Best J (BJ), Best K (BK), Best L (BL), Best M (BM), Best Q (BQ), Best Grand master key (GMK), construction master key (CMK), master key (MK), keyed different (KD), keyed alike (KA), interchangeable core uncombined (IC), 0-bitted (0BIT)
AVAILABLE 6- OR 7-PIN
- **Keying Options**


8400 Series Accessories

Non-Restricted Keyway

**FOR KNOB TRIM (EMP),
LEVER TRIM (CTL)**

CL100219 —
Cylinder, Schlage C, US26D

CL100584 —
Cylinder, Schlage C, US4
Standard brass 6-pin cylinder
SCC keyway, optional keyways
available, (see price list).




CL100268 —
IC Core Best A 6 Pin, US26D

CL100270 —
IC Core Best A 7 Pin, US26D

CL100269 —
IC Core Best A 6 Pin, US4

CL100271 —
IC Core Best A 7 Pin, US4
Small format interchangeable core
brass cylinder 6-pin standard, 7-pin
available. Best "A" keyway standard.



Glass Shim Plate

EX100051

Shim plate standard.



Tell Restricted Keyway

**FOR LEVER TRIM (CTL), THUMBPIECE
TRIM (TP81), ESCUTCHEON LEVER
TRIM (ESC), HEAVY-DUTY ESCUTCHEON
ENTRY LEVER TRIM (ESCHD), PULL TRIM
(PT881)**

TELL CYLINDERS:

CL101503 —
6 pin Tell cylinder, US26D

CL101504 —
6 pin Tell cylinder, US4



TELL INTERCHANGEABLE CORES:

CL101499 —
6 pin Tell IC core, US26D

CL101500 —
6 pin Tell IC core, US4

CL101501 —
7 pin Tell IC core, US26D

CL101502 —
7 pin Tell IC core, US4



8400 Series Trim

8PDT

EX100013 (AL)


Exterior blank pull.



8P03

EX100014 (AL)

Exterior pull with cylinder cut out.



TP81

EX100008 (AL)

Exterior thumbpiece trim, includes 1-1/4" mortise cylinder SCC



EMP808

EX100010 (entry, US32D)

EMP875

EX100011 (passage, US32D)

EMP886

EX100012 (storeroom, US32D)

Exterior sectional ball knob trim.



PT881

EX100090 (AL)

Pull trim with rim cylinder



CTL / Lever Trim (w/out clutch)

EX100005 (entry, US26D)*

EX100006 (passage, US26D)

EX100038 (storeroom, US26D)

Exterior sectional lever trim.



ESC / Escutcheon Trim

EX100054 (entry, US26D)

EX100056 (passage, US26D)

EX100055 (storeroom, US26D)

EX100057 (dummy, US26D)

Exterior escutcheon free wheeling lever trim, includes 1-1/4" mortise cylinder SCC



ESCHD / Escutcheon Trim, Heavy-Duty

EX100303 (entry, US32D)

**-03 Storeroom function available, consult customer service. Requires EX100336 cam.*


Exterior heavy-duty escutcheon free wheeling lever trim, includes 1-1/4" mortise cylinder SCC



**Entry CTL lever trim also available in
US3 / Bright Brass / EX100171
Duro / Duronodic / EX100173*

How To Order 8400 Series

IC KEYWAY CYLINDER AVAILABLE 6- OR 7-PIN

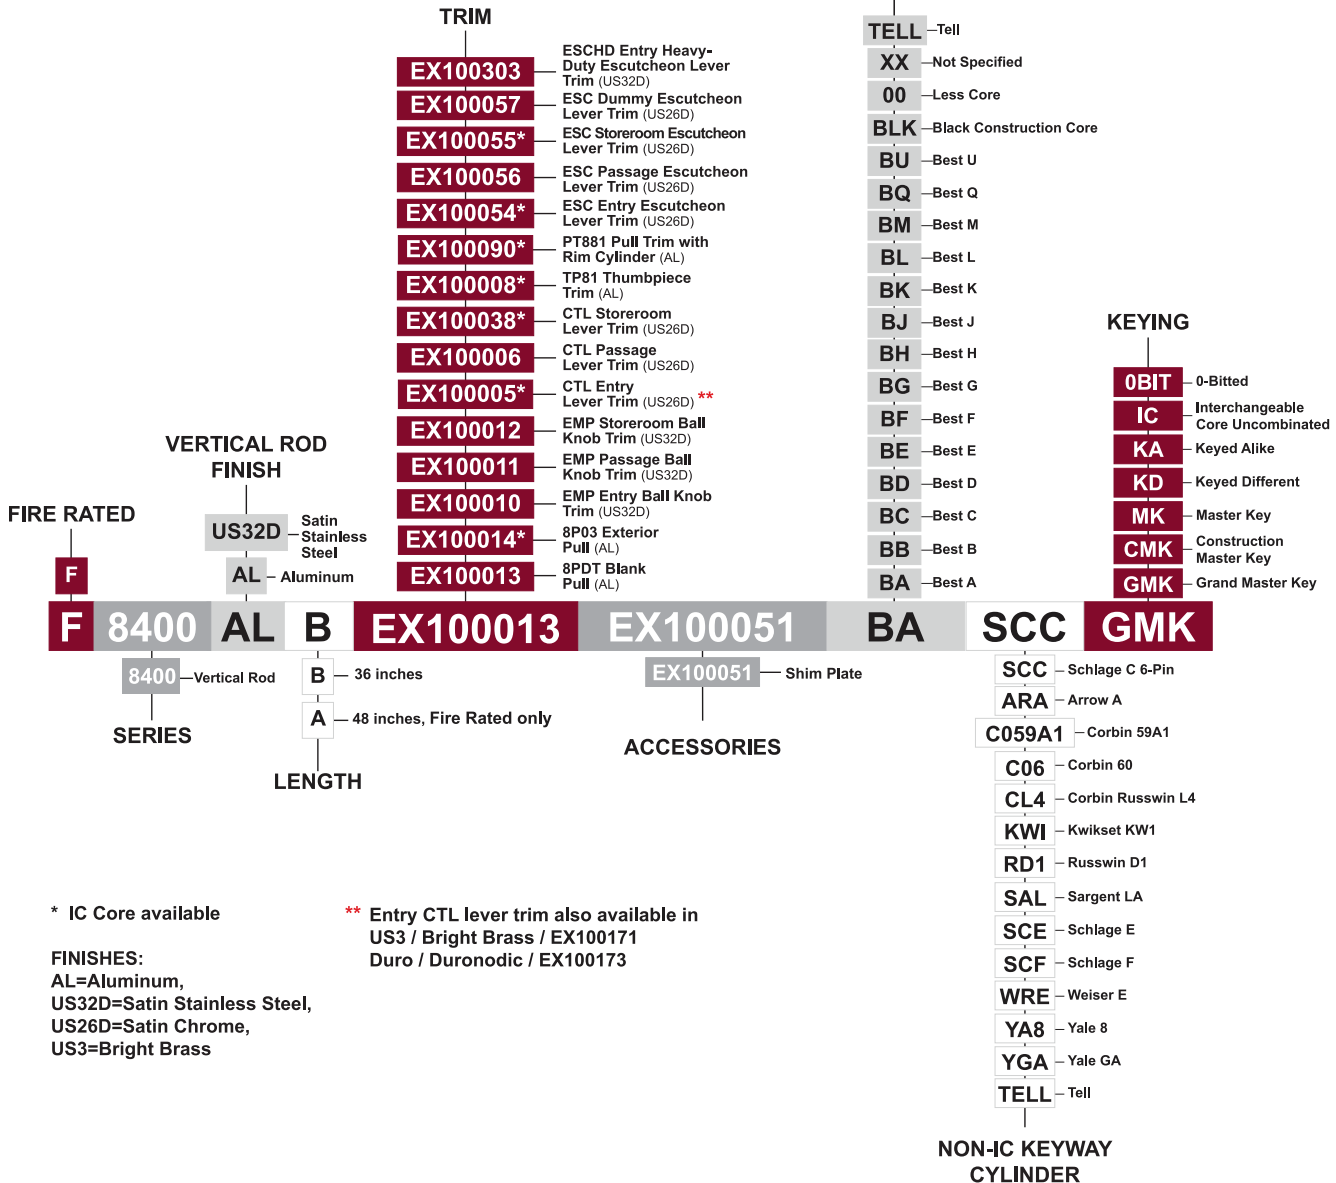

* IC Core available

FINISHES:
AL=Aluminum,
US32D=Satin Stainless Steel,
US26D=Satin Chrome,
US3=Bright Brass

** Entry CTL lever trim also available in
US3 / Bright Brass / EX100171
Duro / Duronodic / EX100173

ALL CYLINDERS AVAILABLE 6-PIN. CAN ALSO BE PINNED 5-PIN.
TELL KEYWAY CYLINDER IS AVAILABLE ONLY KEYED TO 6-PIN.

9500 SERIES

Heavy-Duty Commercial Grade 1 Architectural Rim Exit Device



Standard Features

- **Performance** Complies with ANSI A156.3, 2001, Grade 1, UL/ULC Listed
- **Rail** Fits 30" to 36" doors
- **Latch** Stainless steel ¾" throw with deadlatch feature
- **Backset** 2-3/4"
- **Strikes** Adjustable with slotted holes for adjustments
- **Standard Cylinder** Standard cylinder Schlage (SCC) - 6-pin solid brass, C keyway, keyed different (KD).
- **Fasteners** Accommodates wood and metal doors with thru bolts standard
- **Door Range** 1-3/4" to 2-1/4" thick
- **Door Preparation** Surface mounted and covers 161 prep
- **Warranty** 10 years

Optional Features

- **Fire Rated** Fire Rated device available for use on doors rated up to 3 hours.
- **UL Listed** 3 hour fire rated device available
- **Exterior Trim** Exterior blank pull, exterior pull with cylinder cut out, entry ball knob trim, storeroom ball knob trim, entry lever trim without clutch, exterior thumbpiece trim, pull trim with rim cylinder, exterior escutcheon lever trim, heavy-duty escutcheon entry lever trim
- **Strikes** Other strikes available

Keying Options for Select Lever Trim

- **Tell Cylinder** Restricted Tell keyway cylinder can key both the cylinder and interchangeable core in one lock. The cylinders and IC cores are interchangeable. Tell keyway cylinder is available only keyed to 6-pin. Tell IC cylinder can be keyed to 6-pin or 7-pin interchangeable core (IC).
- **Other Cylinder Options** Arrow A (ARA), Corbin 59A1 (C059A1), Corbin 60 (C06), Corbin Russwin L4 (CL4), Kwikset (KW1), Russwin D1 (RD1), Sargent LA (SAL), Schlage E (SCE), Schlage F (SCF), Weiser E (WRE), Yale 8 (YA8), Yale GA (YGA)
ALL CYLINDERS 6-PIN. CAN ALSO BE PINNED 5-PIN.
- **IC Keyway Cylinder** Tell, Best A (BA), Best B (BB), Best C (BC), Best D (BD), Best E (BE), Best F (BF), Best G (BG), Best H (BH), Best J (BJ), Best K (BK), Best L (BL), Best M (BM), Best Q (BQ), Best
AVAILABLE 6- OR 7-PIN
- **Keying Options** Grand master key (GMK), construction master key (CMK), master key (MK), keyed different (KD), keyed alike (KA), interchangeable core uncombined (IC), 0-bitted (OBIT)

9500 Series Accessories

Non-Restricted Keyway

FOR LEVER TRIM (CTL)

CL100219 —
Cylinder, Schlage C, US26D

CL100584 —
Cylinder, Schlage C, US4
Standard brass 6-pin cylinder
SCC keyway, optional keyways
available, (see price list).




CL100268 —
IC Core Best A 6 Pin, US26D

CL100270 —
IC Core Best A 7 Pin, US26D

CL100269 —
IC Core Best A 6 Pin, US4

CL100271 —
IC Core Best A 7 Pin, US4
Small format interchangeable core
brass cylinder 6-pin standard, 7-pin
available. Best "A" keyway standard.



Tell Restricted Keyway

**FOR LEVER TRIM (CTL), THUMBPIECE
TRIM (TP81), ESCUTCHEON LEVER
TRIM (ESC), HEAVY-DUTY ESCUTCHEON
ENTRY LEVER TRIM (ESCHD), PULL TRIM
(PT881)**

TELL CYLINDERS:

CL101503 —
6 pin Tell cylinder, US26D

CL101504 —
6 pin Tell cylinder, US4



TELL INTERCHANGEABLE CORES:

CL101499 —
6 pin Tell IC core, US26D

CL101500 —
6 pin Tell IC core, US4

CL101501 —
7 pin Tell IC core, US26D

CL101502 —
7 pin Tell IC core, US4




416 Strike

Standard strike for
rim exit device.
Slotted holes for
easy adjustment.
Black powder
coated finish.



Overlapping Strike EX100007 (US32D)

Optional strike used
on inactive door when
pairs of doors require
rim exit device on
active door.



9500 Series Trim

8PDT

EX100013 (AL)


Exterior blank pull.



8P03

EX100014 (AL)

Exterior pull with cylinder cut out.



EMP808

EX100010 (entry, US32D)

EMP875

EX100011 (passage, US32D)

EMP886

EX100012 (storeroom, US32D)

Exterior sectional ball knob trim.



TP81

EX100008 (AL)

Exterior thumbpiece trim, includes 1-1/4" mortise cylinder SCC



CTL / Lever Trim (w/out clutch)

EX100005 (entry, US26D)*

EX100006 (passage, US26D)

EX100038 (storeroom, US26D)

Exterior sectional lever trim.



PT881

EX100090

(AL)

Pull trim with rim cylinder



ESC / Escutcheon Trim

EX100054 (entry, US26D)

EX100056 (passage, US26D)

EX100055 (storeroom, US26D)

EX100057 (dummy, US26D)

Exterior escutcheon free wheeling lever trim, includes 1-1/4" mortise cylinder SCC



ESCHD / Escutcheon Trim, Heavy-Duty

EX100303 (entry, US32D)

*-03 Storeroom function available, consult customer service. Requires EX100336 cam.

Exterior heavy-duty escutcheon free wheeling lever trim, includes 1-1/4" mortise cylinder SCC




*Entry CTL lever trim also available in
US3 / Bright Brass / EX100171
Duro / Duronodic / EX100173

How to Order 9500 Series


NON-IC KEYWAY CYLINDER

ALL CYLINDERS AVAILABLE 6-PIN. CAN ALSO BE PINNED 5-PIN.
TELL KEYWAY CYLINDER IS AVAILABLE ONLY KEYED TO 6-PIN.

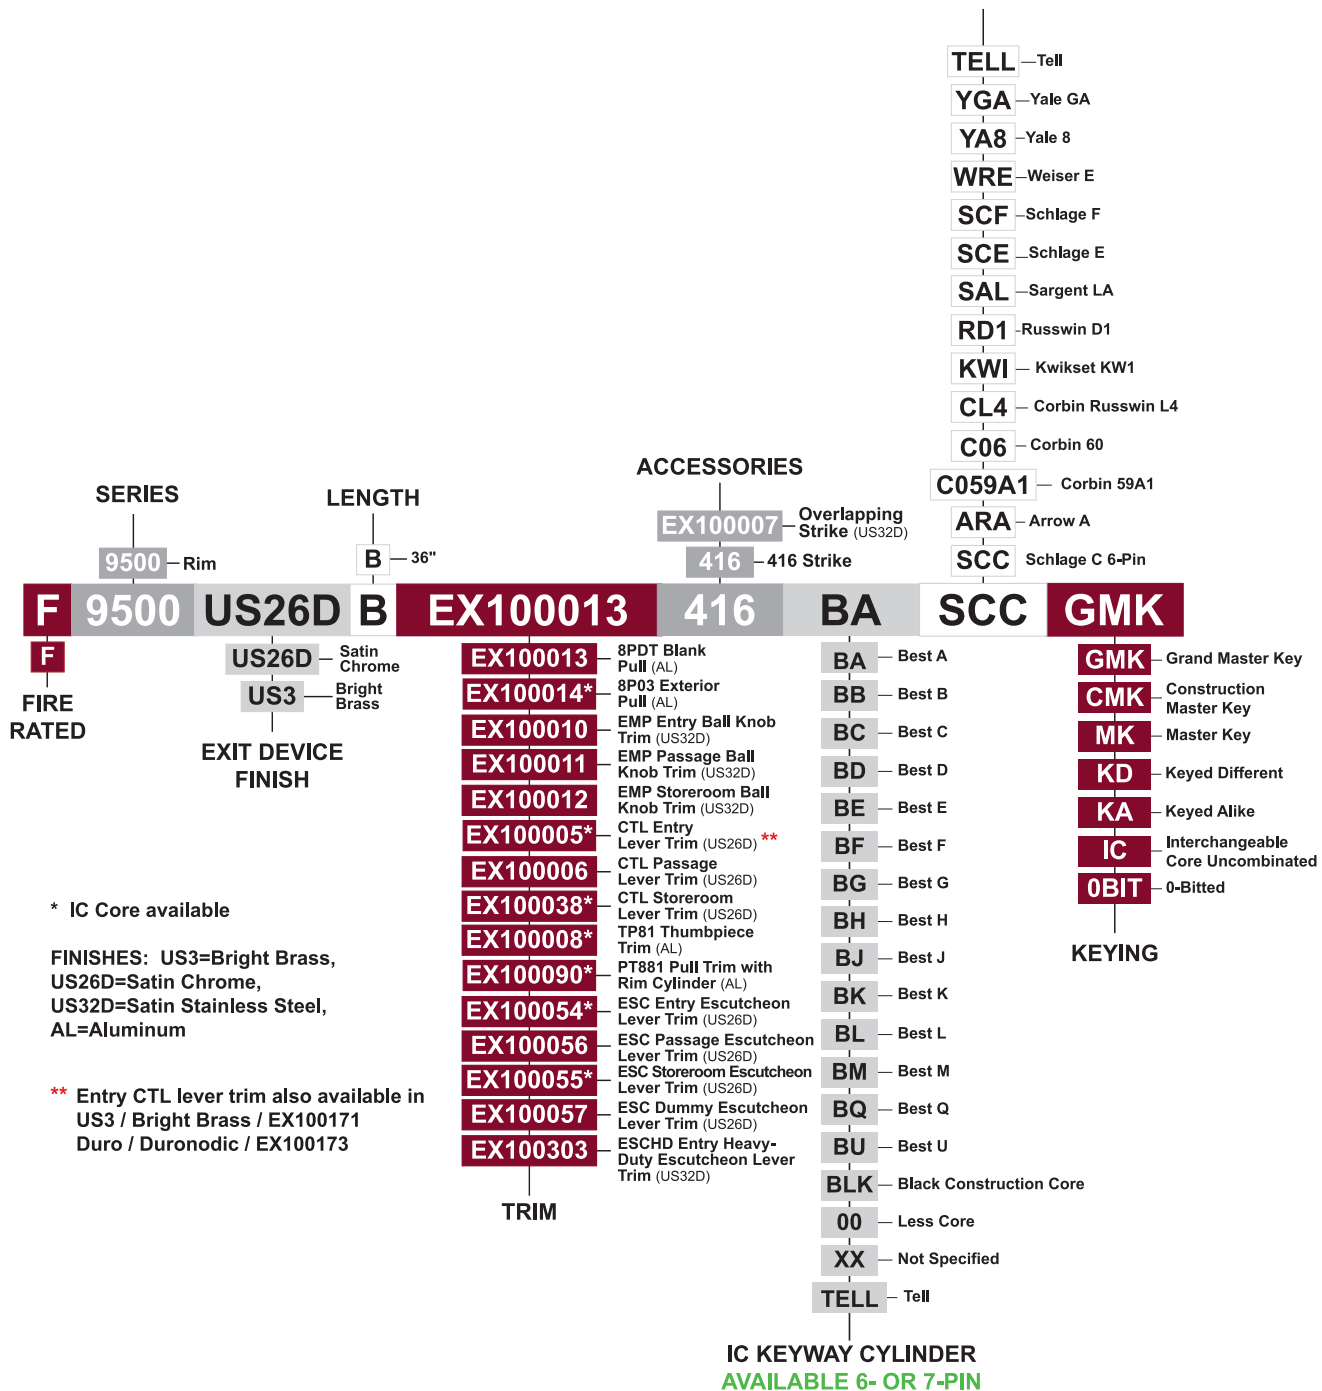

9400 SERIES

Heavy-Duty Commercial Grade 1 Architectural Surface Vertical Rod Exit Device

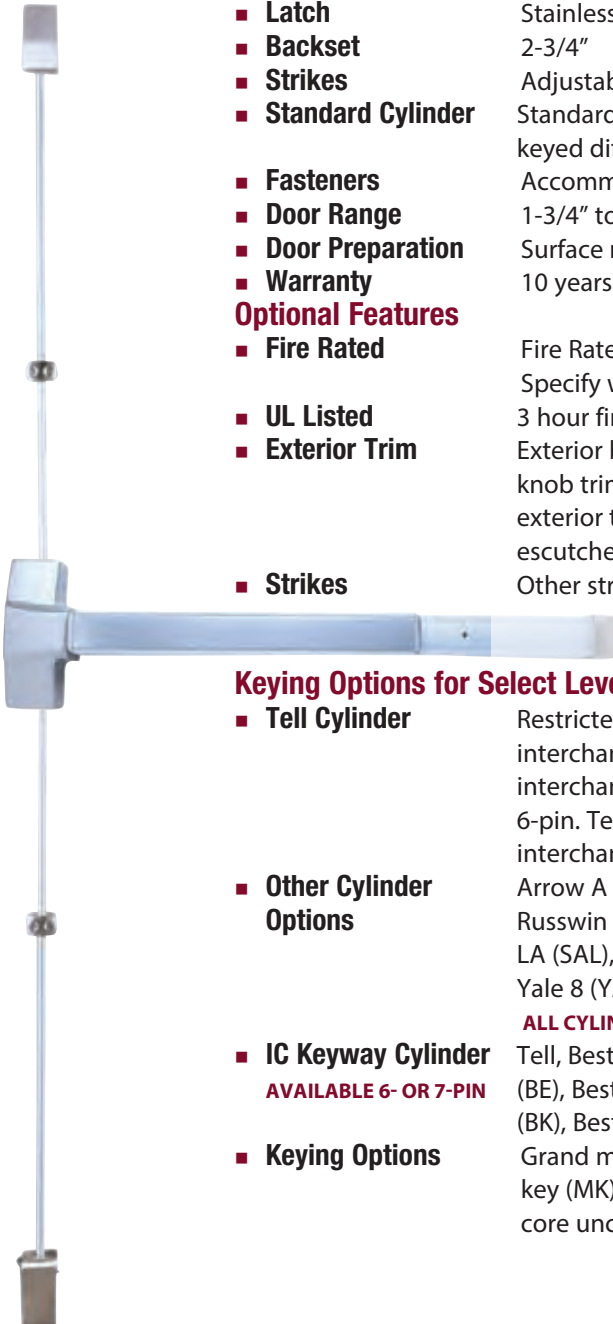

Standard Features

- **Performance** Complies with ANSI A156.3, 2001, Grade 1, UL/ULC Listed
- **Rail** Fits 30" to 36" doors
- **Latch** Stainless steel 5/8" throw with deadlatch feature
- **Backset** 2-3/4"
- **Strikes** Adjustable with slotted holes for adjustments
- **Standard Cylinder** Standard cylinder Schlage (SCC) - 6-pin solid brass, C keyway, keyed different (KD).
- **Fasteners** Accommodates wood and metal doors with thru bolts standard
- **Door Range** 1-3/4" to 2-1/4" thick
- **Door Preparation** Surface mounted and covers 161 prep
- **Warranty** 10 years

Optional Features

- **Fire Rated** Fire Rated device available for use on doors rated up to 3 hours. Specify when ordering.
- **UL Listed** 3 hour fire rated device available
- **Exterior Trim** Exterior blank pull, exterior pull with cylinder cut out, entry ball knob trim, storeroom ball knob trim, entry lever trim without clutch, exterior thumbpiece trim, pull trim with rim cylinder, exterior escutcheon lever trim, heavy-duty escutcheon entry lever trim
- **Strikes** Other strikes available

Keying Options for Select Lever Trim

- **Tell Cylinder** Restricted Tell keyway cylinder can key both the cylinder and interchangeable core in one lock. The cylinders and IC cores are interchangeable. Tell keyway cylinder is available only keyed to 6-pin. Tell IC cylinder can be keyed to 6-pin or 7-pin interchangeable core (IC).
- **Other Cylinder Options** Arrow A (ARA), Corbin 59A1 (C059A1), Corbin 60 (C06), Corbin Russwin L4 (CL4), Kwikset (KW1), Russwin D1 (RD1), Sargent LA (SAL), Schlage E (SCE), Schlage F (SCF), Weiser E (WRE), Yale 8 (YA8), Yale GA (YGA)
ALL CYLINDERS 6-PIN. CAN ALSO BE PINNED 5-PIN.
- **IC Keyway Cylinder** Tell, Best A (BA), Best B (BB), Best C (BC), Best D (BD), Best E (BE), Best F (BF), Best G (BG), Best H (BH), Best J (BJ), Best K (BK), Best L (BL), Best M (BM), Best Q (BQ), Best
AVAILABLE 6- OR 7-PIN
- **Keying Options** Grand master key (GMK), constructionmaster key (CMK), master key (MK), keyed different (KD), keyed alike (KA), interchangeable core uncombined (IC), 0-bitted (0BIT)

9400 Series Accessories

Non-Restricted Keyway

FOR LEVER TRIM (CTL)

CL100219 —
Cylinder, Schlage C, US26D

CL100584 —
Cylinder, Schlage C, US4
Standard brass 6-pin cylinder
SCC keyway, optional keyways
available, (see price list).




CL100268 —
IC Core Best A 6 Pin, US26D

CL100270 —
IC Core Best A 7 Pin, US26D

CL100269 —
IC Core Best A 6 Pin, US4

CL100271 —
IC Core Best A 7 Pin, US4
Small format interchangeable core
brass cylinder 6-pin standard, 7-pin
available. Best "A" keyway standard.



Tell Restricted Keyway

**FOR LEVER TRIM (CTL), THUMBPIECE
TRIM (TP81), ESCUTCHEON LEVER
TRIM (ESC), HEAVY-DUTY ESCUTCHEON
ENTRY LEVER TRIM (ESCHD), PULL TRIM
(PT881)**

TELL CYLINDERS:

CL101503 —
6 pin Tell cylinder, US26D

CL101504 —
6 pin Tell cylinder, US4



TELL INTERCHANGEABLE CORES:

CL101499 —
6 pin Tell IC core, US26D

CL101500 —
6 pin Tell IC core, US4

CL101501 —
7 pin Tell IC core, US26D

CL101502 —
7 pin Tell IC core, US4




416 Strike

Standard strike for
rim exit device.
Slotted holes for
easy adjustment.
Black powder
coated finish.



Overlapping Strike EX100007 (US32D)

Optional strike used
on inactive door when
pairs of doors require
rim exit device on
active door.



9400 Series Trim

8PDT

EX100013 (AL)


Exterior blank pull.



8P03

EX100014 (AL)

Exterior pull with cylinder cut out.



EMP808

EX100010 (entry, US32D)

EMP875

EX100011 (passage, US32D)

EMP886

EX100012 (storeroom, US32D)

Exterior sectional ball knob trim.



TP81

EX100008 (AL)

Exterior thumbpiece trim, includes 1-1/4" mortise cylinder SCC



CTL / Lever Trim (w/out clutch)

EX100005 (entry, US26D)*

EX100006 (passage, US26D)

EX100038 (storeroom, US26D)

Exterior sectional lever trim.



PT881

EX100090

(AL)

Pull trim with rim cylinder



ESC / Escutcheon Trim

EX100054 (entry, US26D)

EX100056 (passage, US26D)

EX100055 (storeroom, US26D)

EX100057 (dummy, US26D)

Exterior escutcheon free wheeling lever trim, includes 1-1/4" mortise cylinder SCC



ESCHD / Escutcheon Trim, Heavy-Duty

EX100303 (entry, US32D)

**-03 Storeroom function available, consult customer service.*

Requires EX100336 cam.

Exterior heavy-duty escutcheon free wheeling lever trim, includes

1-1/4" mortise cylinder SCC




**Entry CTL lever trim also available in
US3 / Bright Brass / EX100171
Duro / Duronodic / EX100173*

How to Order 9400 Series

NON-IC KEYWAY CYLINDER

ALL CYLINDERS AVAILABLE 6-PIN. CAN ALSO BE PINNED 5-PIN.
TELL KEYWAY CYLINDER IS AVAILABLE ONLY KEYED TO 6-PIN.

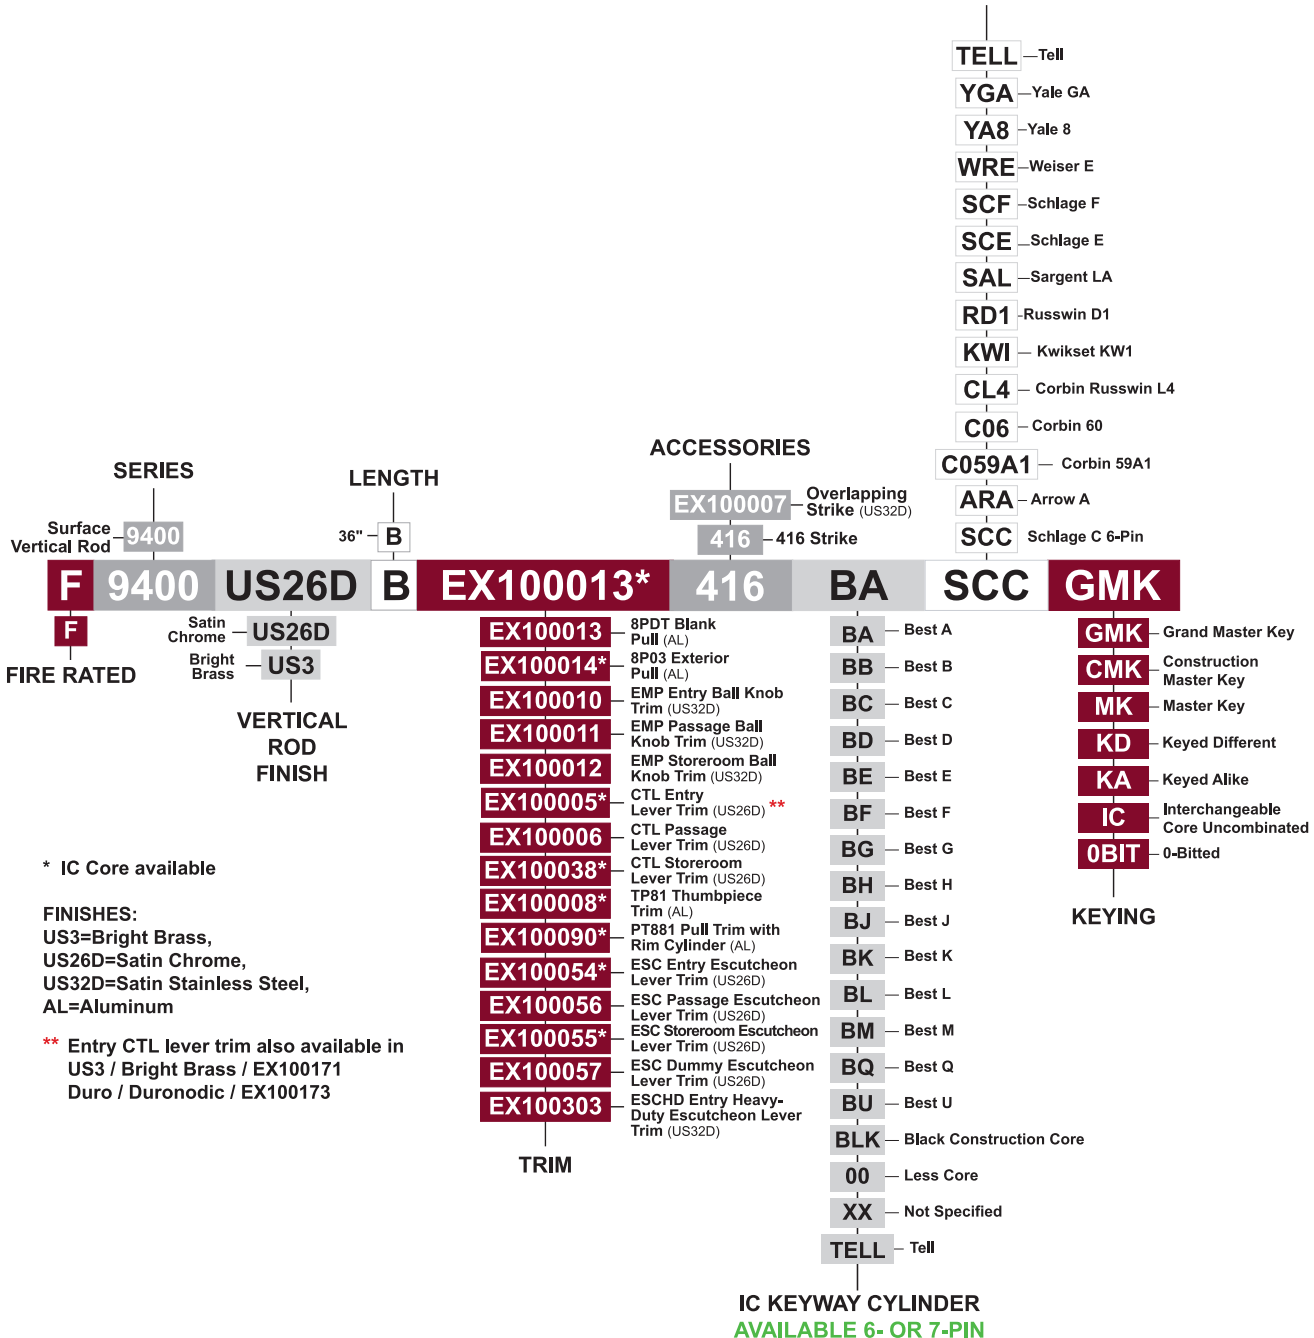

9100 Series Mortise Lock Exit Device

For High Security Installations



ESC / Escutcheon Trim

EX100342 (Entry, US32D, 304)

EX100343 (Entry, US32D, 316)

Standard Features

■ Application

For use on single doors or active leaf of double doors, where both exit device and high security are required. Fits for 1-3/4" (44mm) standard up to 2-1/4" (57 mm) thick RHR or LHR hollow metal door, and wood doors.

■ Specification **MORTISE LOCK PORTION**

Lockcase: Steel, plated. 6-1/6" x 3-15/16" x 29/32"
(154mm x 100mm x 23mm)

Anti Friction Latchbolt: 3/4" (19mm) throw, stainless steel.
Full reversible without removing the lock from the door.

Auxiliary Deadlocking Bolt: Non handed, stainless steel

Faceplate: 1.5mm thick stainless steel. Adjustable.

Strike: 2mm thick stainless steel, universal curved lip.

■ Specification **DEVICE BODY PORTION**

Device Head Cover: Steel, stainless steel

Chassis: Stainless steel

Push Bar: Stainless steel

End Cap: Stainless steel

Mounting: Packed with standard machine screws. Not furnished sex bolts.
Order "SNB" for wood or un-reinforced metal doors


U.L. Listing: Fire Rated

Dogging: Not available

NOTE: Fire rated labeled device is not permitted to be equipped with dogging.

FINISHES: This device is available in 304 and 316 stainless steel

How to Order 9100 Series

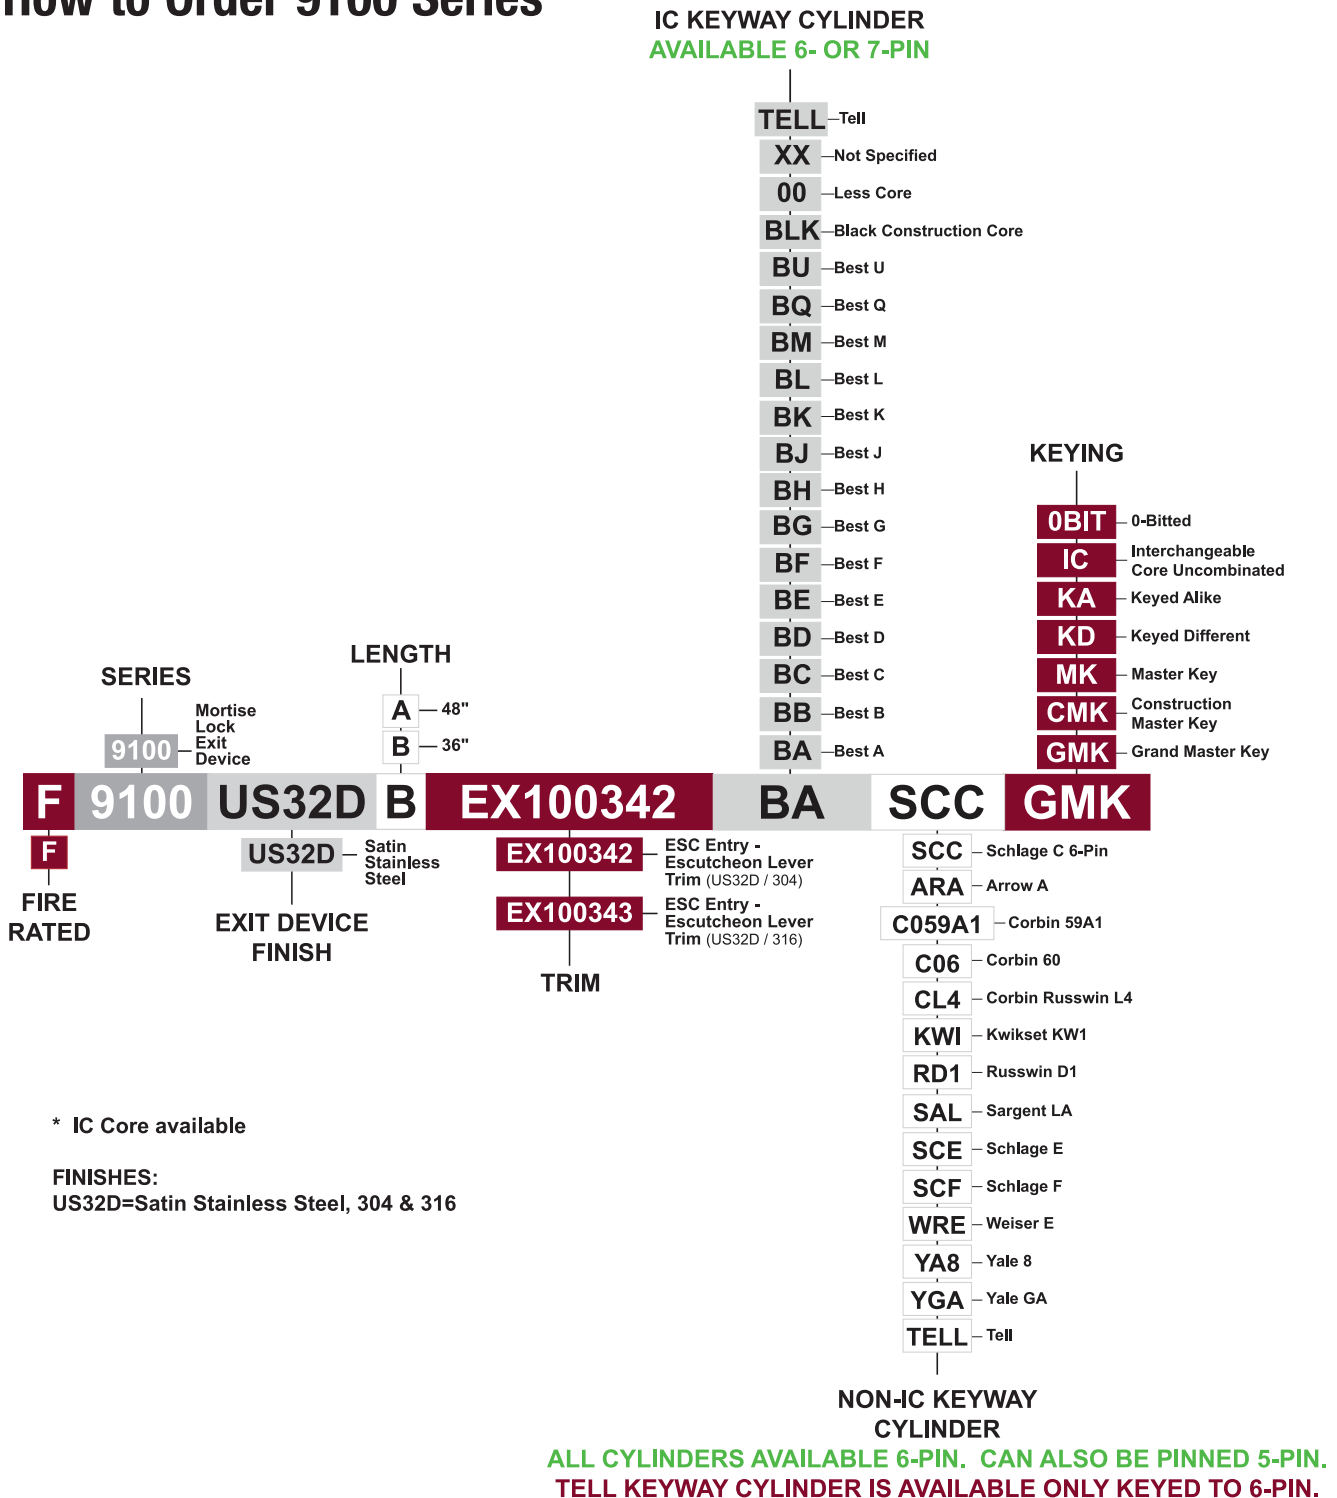

Hinges & Door Trim
Red Tab


Hinges & Door Trim
Red Tab back

COMMERCIAL DOORS & HARDWARE

table of contents

HINGES, HINGE PIVOTS, OFFSET PIVOTS, DOOR TRIM, COMMERCIAL THRESHOLDS & WEATHERSTRIPPING

	PAGE
H4545 SERIES / 4-1/2" x 4-1/2" Square Corner Hinges	2
H4040 SERIES / 4" X 4" Full Mortise Hinges	3
Aluminum Storefront / 4-1/2" X 4" Full Mortise Hinges	4
SPRING HINGE (Commercial) / 4-1/2" x 4-1/2" Square Corner Hinges, Reversible, Fully Adjustable	5
Hinge Pivots / 4-1/2" x 4-1/2" Square Corner Hinges	6
Door Trim	7
Commercial Thresholds & Weatherstripping	15



H4545 SERIES

4-1/2" x 4-1/2" Square Corner Hinges



US26D / Satin Chrome



USP / Prime Coat



US3 / Polished Brass



US32D / Satin Stainless Steel


Standard Features

- **Performance** Complies with ANSI A156.1, 1999 (plain bearing and ball bearing)
- **Performance** Complies with ANSI A156.17, 1999, UL listed (spring hinge)
- **Hinge** 4-1/2" x 4-1/2", square corner, templated, .134" gauge steel.
See below for pin and finish options.
- **Screws** Furnished with 24 metal screws and 24 #12 wood screws
- **Warranty** 1 year

Optional Features

- **Pin** Ball Bearing & Non-removeable
- **Finishes** USP, US26D, US32D, US3, US10B
- **Note** Other finishes and sizes available upon request. Check for availability and lead time.
- **Gauge** Heavy-duty available in US26D finish, ball bearing, with either loose pin or non-removeable pin (NRP)

How To Order H4545 Series

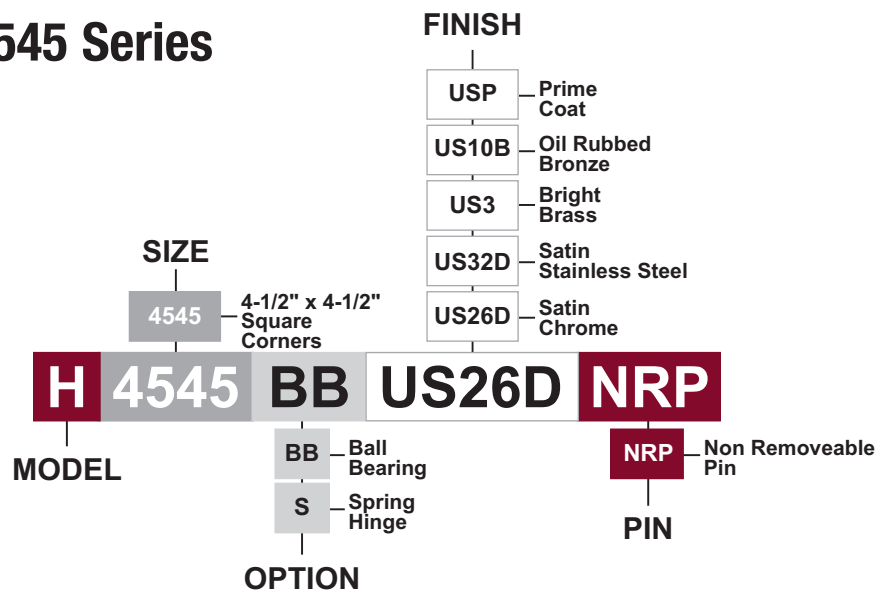

H4040 SERIES

4" x 4" Full Mortise Hinges



US26D / Satin Chrome



US10B / Oil Rubbed Bronze

Standard Features

- **Performance** Complies with ANSI A156.1, 1999 (plain bearing and ball bearing)
- **Hinge** 4" x 4", steel square corner, templated, full mortise, .085" gauge steel, standard weight. See below for pin and finish options.
- **Warranty** 1 year

Optional Features

- **Pin** Non-removeable
- **Finishes** US26D, US3, US4, US10B, USP
- **Note** Other finishes and sizes available upon request. Check for availability and lead time.


Standard Features

- **Performance** Complies with ANSI A156.1, 1999 (plain bearing and ball bearing)
- **Hinge** 4" x 4", steel 5/8" round radius corner, templated, full mortise, .085" gauge steel, standard weight. See below for pin and finish options.
- **Warranty** 1 year

Optional Features


- **Pin** Non-removeable
- **Finishes** US26D, US3, US4, US10B, USP
- **Note** Other finishes and sizes available upon request. Check for availability and lead time.

How To Order H4040 Series

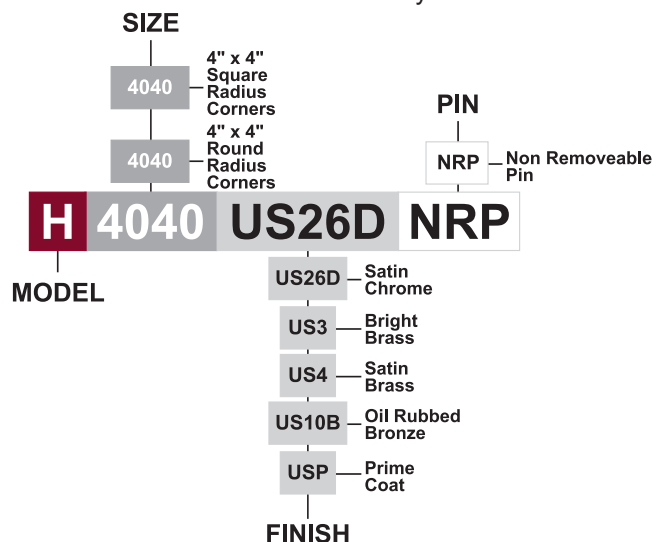

Aluminum Storefront Frame

4-1/2" x 4" Full Mortise Radius Corner Hinges



Standard Features

- **Performance** Complies with ANSI 156.1-2000
- **Hinge** Standard sizes 4-1/2" x 4"; standard weight; standard with ball bearings; standard with 3/16" radius corners; templated
- **Screws** Furnished with metal screws and 1/2 wood screws

Optional Features

- **Pin** Non-removable pin
- **Finishes** US32D, DKB, and black powdercoat

How To Order Aluminum Storefront Full Mortise Hinges



SPRING HINGE (Commercial)

4-1/2" x 4-1/2" Square Corner Hinges, Reversible, Fully Adjustable



Full Mortise Type Template

Size to FH Screws		Pieces Per Box	Pieces Per Carton
Machine	Wood	1	48
1/2" x 12-24	1-1/4" x 12		

US26D / Satin Chrome

SH-140

4-1/2" X 4-1/2"

.134




Standard Features

- **Performance** Complies with ANSI A156.17, 1999, UL listed (spring hinge)
- **Hinge** Templated, .134" gauge steel.
- **Screws** Furnished with 8 metal screws and 8 #12 wood screws
- **Warranty** 1 year

Optional Features


- **Finishes** USP/Prime Coat, US26D/Satin Chrome, US4/Satin Brass, US3/Bright Brass
- **Material** Steel available
- **Note** Other finishes and sizes available upon request. Check for availability and lead time.

How To Order Spring Hinges

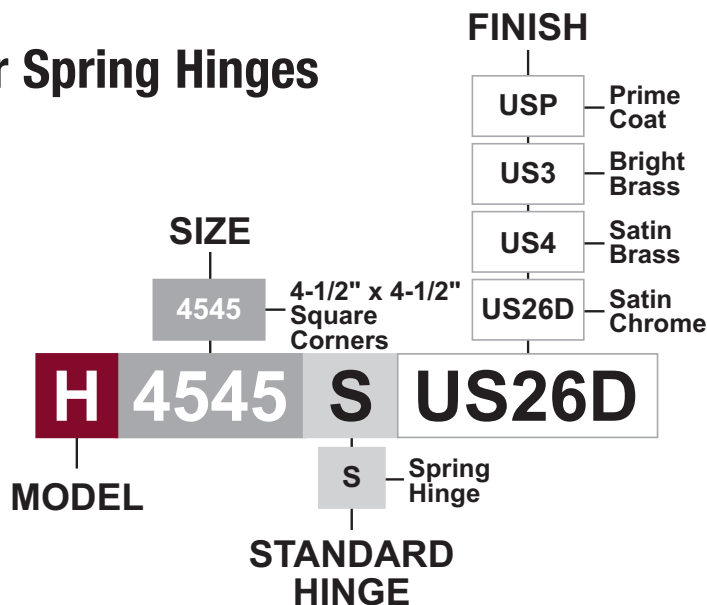


HINGE PIVOTS

4-1/2" x 4-1/2" Square Corner Hinges

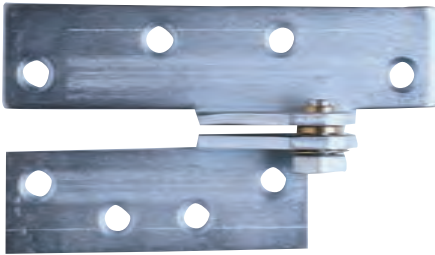

Left Hand - BZ / Bright Zinc
HG100233

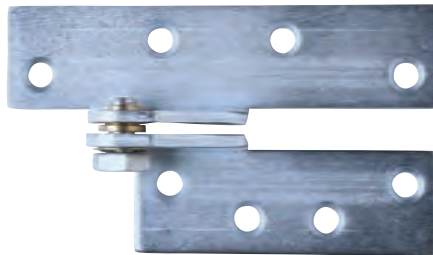


Right Hand - BZ / Bright Zinc
HG100234

Standard Features

- **Butt Hinge Width** 4.5" x 4.5", square corners
- **Projection** 3/4" — projection from centerline of pivot to face of door
- **Door Thickness** 1-3/4"
- **Gauge** .187
- **Handing** Left hand or right hand
- **Machine Screws** 3/4 x 1/4-20
- **Wood Screws** 1-1/4 x 14
- **Warranty** 1 year warranty

How To Order Hinge Pivots

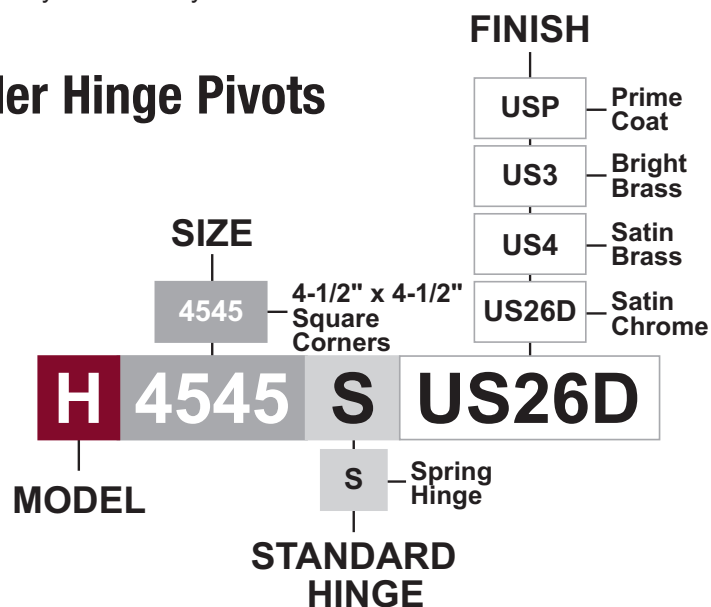

DOOR TRIM

Push & Pull Plates



DT100071 / P35153 Bright Brass

DT100072 / P351532D Satin Stainless Steel

DT100073 / P351528 Aluminum

- Push plate square corner-beveled .050 gauge. 3.5" x 15"



DT100068 / PP35153 Bright Brass

DT100067 / PP351532D Satin Stainless Steel

DT100484 / PP351528 Aluminum

- Pull plate square corner-beveled .050 gauge.
3.5" x 15", 5.5" CTC Pull

Door Holders



DT100008 / 418SKD26D Satin Chrome Plated

DT100483 / 418SKD3 Bright Brass

DT100481 / 418SKD10B Oil Rubbed Bronze

DT100009 / 418SKD10 Satin Bronze

- Cast 4-1/8" triangular top kickdown door holder.



DT100007 / 528SKD26D Satin Chrome Plated

- Cast 4-1/8" square top kickdown door holder.

- Solid brass core



DT100075 / 1468 Black

- Replacement rubber tip for use with kick down door holder.

Floor Stops



DT100033 / 175SDL26D Satin Chrome

DT100041 / 175SDL3 Bright Brass

DT100479 / 175SDL10B Oil Rubbed Bronze

DT100040 / 175SDL10 Satin Bronze

- Cast low style floor stop 1-3/4" diameter with 1/8" thick base.



DT100032 / 175SDH26D Satin Chrome

DT100486 / 175SDH3 Bright Brass

DT100488 / 175SDH10B Oil Rubbed Bronze

DT100487 / 175SDH10 Satin Bronze

- Cast high style floor stop. 1-3/4" diameter with 3/8" thick base.



DT100076 / SDRISER26D Satin Chrome

DT100025 / SDRISER3 Bright Brass

- Dome stop riser. 0.5" high.



DT100038 / 218SF26D Satin Chrome

- Cast floor stop. Height = 3 inches. Base = 2.25".



DT100039 / 219HSF26D Satin Chrome

- Cast floor stop and holder. Height = 3 inches. Base = 2.25".

Wall Stops & Bumpers



DT100085 / 021BX32D Satin Stainless Steel

DT100466 / 021BX3 Bright Brass

DT100467 / 021BX10B Oil Rubbed Bronze

DT100468 / 021BX10 Satin Bronze

- Wrought 2-1/2" diameter convex wall stop with concealed mounting.



DT100084 / 022BV32D Satin Stainless Steel

DT100087 / 022BV3 Bright Brass

DT100465 / 022BV10B Oil Rubbed Bronze

DT100086 / 022BV10 Satin Bronze

- Wrought 2-1/2" diameter concave wall stop with concealed mounting.



DT100088 / 35SB26D Satin Chrome

- Cast wall stop.



DT100089 / 35SBH26D Satin Chrome

- Cast wall stop and holder.

Floor Stops



DT100158 / US15 Satin Nickel

DT100167 / US3 Bright Brass

DT100166 / US10B Oil Rubbed Bronze

■ Spring door stop.

Strikes



DT100021 / 2SDS83 Bright Brass

DT100024 / 2SDS8SL Silver Coated

■ 8" x 1-3/8" deadbolt super security strike.



DT100022 / 2SDS3 Bright Brass

DT100023 / 2SDSSL Silver Coated

■ 4-7/8" x 1-1/4" deadbolt super security strike.



DT100121 / EL10232D Satin Stainless Steel

DT100036 / EL1023 Bright Brass

■ Extended lip strike 2-1/4" x 2".

Door Bolts & Door Guards



DT100042 / 4261FW26D Satin Chrome

DT100471 / 4261FW3 Bright Brass

DT100469 / 4261FW10B Oil Rubbed Bronze

DT100470 / 4261FW10 Satin Bronze

- Lever extension flush bolt for use on wood composite/fire rated doors.



DT100043 / 4081FM26D Satin Chrome

DT100474 / 4081FM3 Bright Brass

DT100473/ 4081FM10B Oil Rubbed Bronze


DT100472 / 4081FM10 Satin Bronze

- Lever extension flush bolt for use on hollow metal/fire rated doors.



DT101589 / 26 Bright Chrome

- 190 degree door viewer with heavy duty privacy cover, 1-3/8" to 2-1/4".

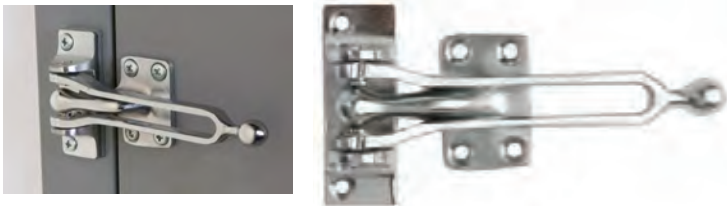

DT100027 / 304GD26D Satin Chrome

DT100475 / 304GD3 Bright Brass

- Heavy duty door guard 4" arm length.



DT100026 / DG45026D Satin Chrome

- Heavy duty door chain.



DT100480 / BL17123 Bright Brass

DT100477 / BL171210B Oil Rubbed Bronze

DT100159 / BL171215 Satin Nickel

- Ball catch. Available in other finishes.

Door Bolts



DT100077 / 909LR26D Satin Chrome

DT100478 / 909LR3 Bright Brass

DT100476 / 909LR10B Oil Rubbed Bronze

- Roller latch



DT100017 / 4131BS Solid Brass material with Satin Chrome finish (26D)

- 8" surface bolt UL listed.

Wrap-Arounds



DT100096 / VF81PB3 Bright Brass

DT100282 / VF81S32D Satin Stainless Steel

- Door wrap-around 4-1/4" x 4-1/2" for 1-3/4" thick door with 2-1/8" hole and 2-3/4" backset.



DT100097 / VF4PB3 Bright Brass

DT100095 / VF4S32D Satin Stainless Steel

- Door wrap-around 4-1/4" x 9" for 1-3/4" thick door with 2-1/8" hole and 2-3/4" backset.

Kickplates



DT100053 / KP63028 Aluminum

DT100054 / KP6303 Bright Brass

DT100055 / KP63032D Satin Stainless Steel

...

DT100056 / KP63428 Aluminum

DT100057 / KP6343 Bright Brass

DT100058 / KP63432D Satin Stainless Steel

...

DT100059 / KP83032D Satin Stainless Steel

...

DT100051 / KP83428 Aluminum

DT100060 / KP8343 Bright Brass

DT100052 / KP83432D Satin Stainless Steel

...

DT100118 / KP8243 Bright Brass

...

DT100146 / KP84632D Satin Stainless Steel

■ 6" x 30" door protection kick plate .050 gauge.

■ 6" x 30" door protection kick plate .050 gauge.

■ 6" x 30" door protection kick plate .050 gauge.

■ 6" x 34" door protection kick plate .050 gauge.

■ 6" x 34" door protection kick plate .050 gauge.

■ 6" x 34" door protection kick plate .050 gauge.

■ 8" x 30" door protection kick plate .050 gauge.

■ 8" x 34" door protection kick plate .050 gauge.

■ 8" x 34" door protection kick plate .050 gauge.

■ 8" x 34" door protection kick plate .050 gauge.

■ 8" x 24" door protection kick plate .050 gauge.

■ 8" x 46" door protection kick plate .050 gauge.


Hinge Pin



DT100156 / US15 Silver Coated

- Hinge pin stop.

Latch Protectors

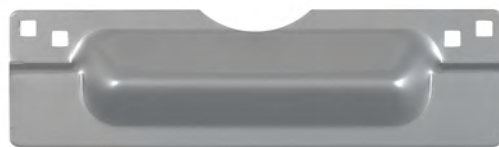

DT100063 / ILP206SL Silver Coated

- Inner locking 6" latch protection plate for inswinging doors.

DT100062 / LP207SL Silver Coated

- 2-3/4" x 7" latch protection plate for use with cylindrical locks on outswinging doors.

DT100061 / LP211SL Silver Coated

- 3" x 11" latch protection plate for use with cylindrical locks on outswinging doors.

Miscellaneous




DT100004 / BF161USP Prime

- Hole filler plate to cover 2-1/8" diameter (161) hole.

COMMERCIAL THRESHOLDS

SADDLE THRESHOLD

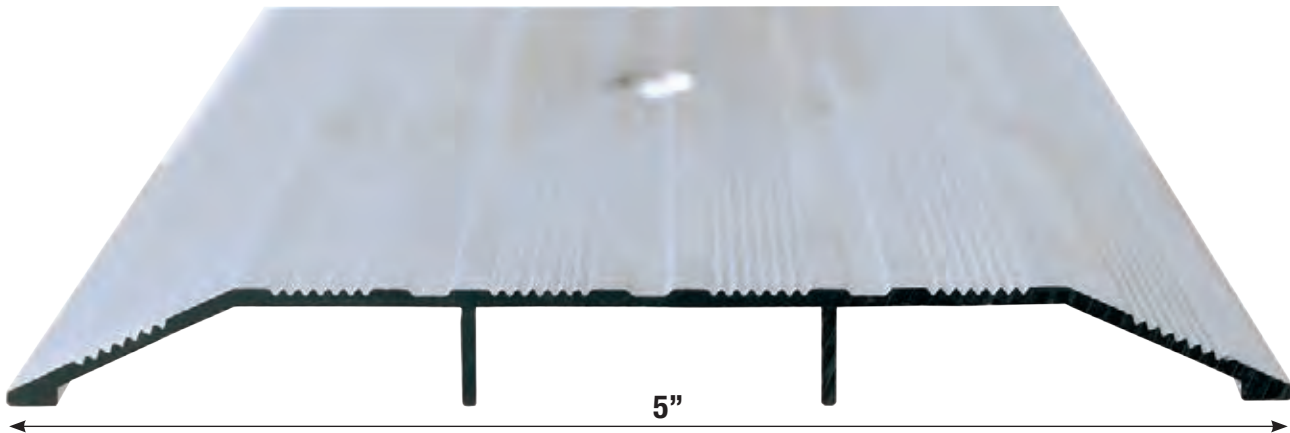

SADDLE THRESHOLD SPECIFICATIONS:

DT100081

36" Aluminum Saddle Threshold


DT100098

72" Aluminum Saddle Threshold



COMMERCIAL WEATHERSTRIP

DRIP CAP

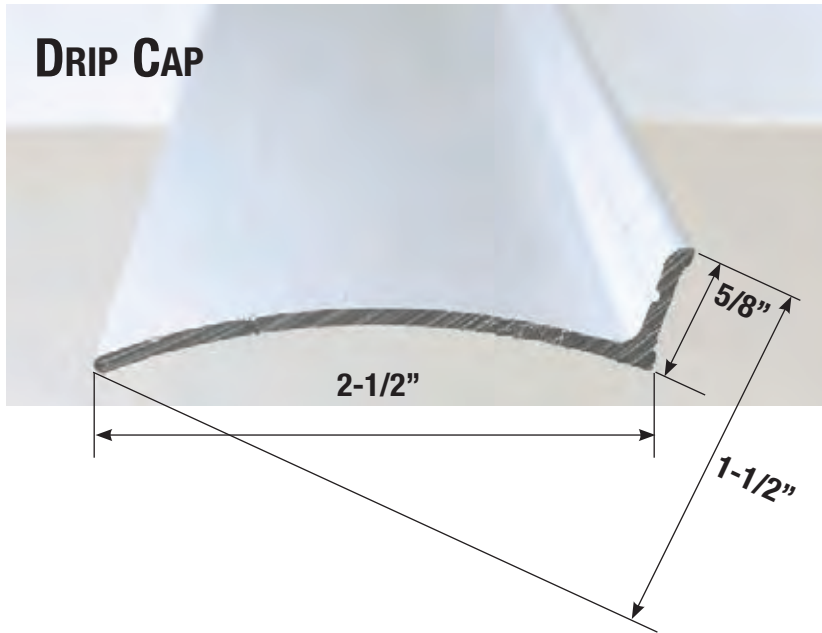

DRIP CAP SPECIFICATIONS

DT100011

40" Door Drip Cap

DT100102

76" Door Drip Cap

MD100029

38.5" Telstar Drip Cap

SWEEP




SWEEP SPECIFICATIONS

DT100101


36" Vinyl Sweep

DT100180

48" Vinyl Sweep

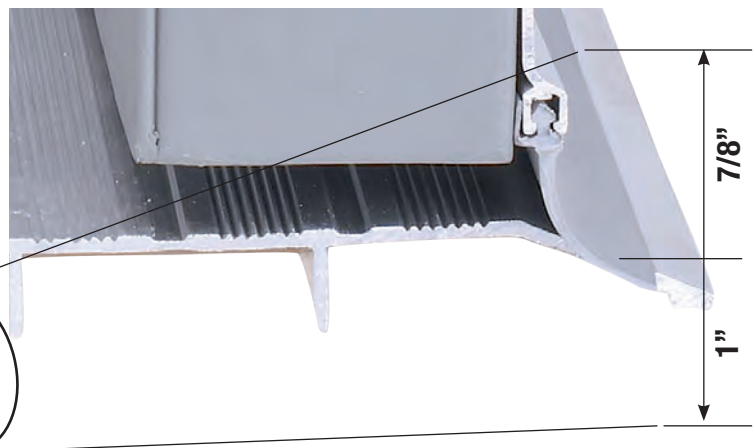

COMMERCIAL WEATHERSTRIP

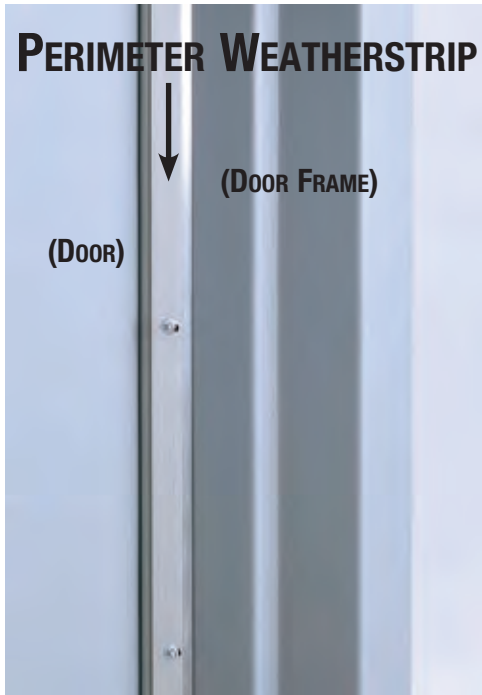

PERIMETER WEATHERSTRIP SPECIFICATIONS

DT100099

3680 Vinyl Aluminum Weatherstrip

36" X 80"

DT100100

7280 Vinyl Aluminum Weatherstrip

72" X 80"

DT100548

3684 Vinyl Aluminum Weatherstrip

36" X 84"



Doors & Frames
Red Tab

Doors & Frames
Red Tab back

COMMERCIAL DOORS & HARDWARE

table of contents

DOORS & FRAMES

	PAGE
Spartan Doors	1
Viking Doors	11
Spartan Frames	13
Telstar Doors	19
Tioga Doors	25
Wood Doors	31
Timely Pre-Finished Doors & Frames	33
Limited Warranty	37



SPARTAN : DOOR



DOORS

MADE IN USA

TELL MFG offers a complete line of standard hollow metal doors to fit your needs. **SPARTAN DOORS** are available in 20 and 18 gauge steel. All doors come with a polystyrene core as standard, making every door smoother, flatter, and stronger. **SPARTAN DOORS** are available in a complete range of fire ratings (up to 3 hours) and are certified by Underwriters Laboratories. All door panels are manufactured from high quality galvanized steel and are thoroughly cleaned inside and out to insure excellent corrosion resistance and paint adhesion. **SPARTAN DOORS** come standard with a prime coat, ready to be finished. Factory applied finish coat paint is available in many colors. Contact customer service for pricing and quantities required, for factory finish paint.


TELL MFG follows the same set of performance specifications as other door manufacturers, as set forth in the Steel Door Institute (SDI) requirements.

- Insulated with polystyrene core
- Non-handed
- Galvanized (standard)
- Fire rated up to 3 hours
- 7 gauge hinge reinforcements
- Reinforced 161 lock prep
- Closer reinforcement (standard)
- Meets ANSI standards
- Universal 4 ½" hinge prep
- Inverted top and bottom channel
- Installed steel cap standard


SPARTAN HOLLOW METAL HANDING CHART

Handing of doors and frames present a problem for many, even within the door industry. The below chart is designed to make your choice easy, reducing the chances of error.

IN-SWING DOORS

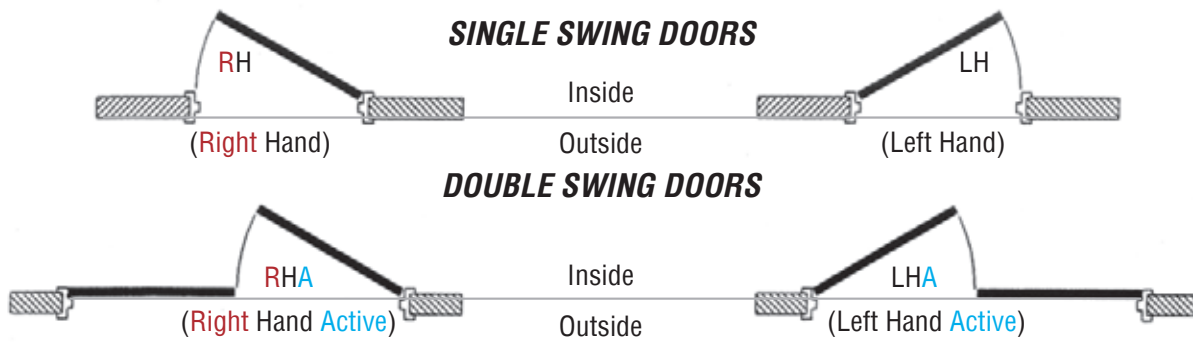

OUT-SWING DOORS

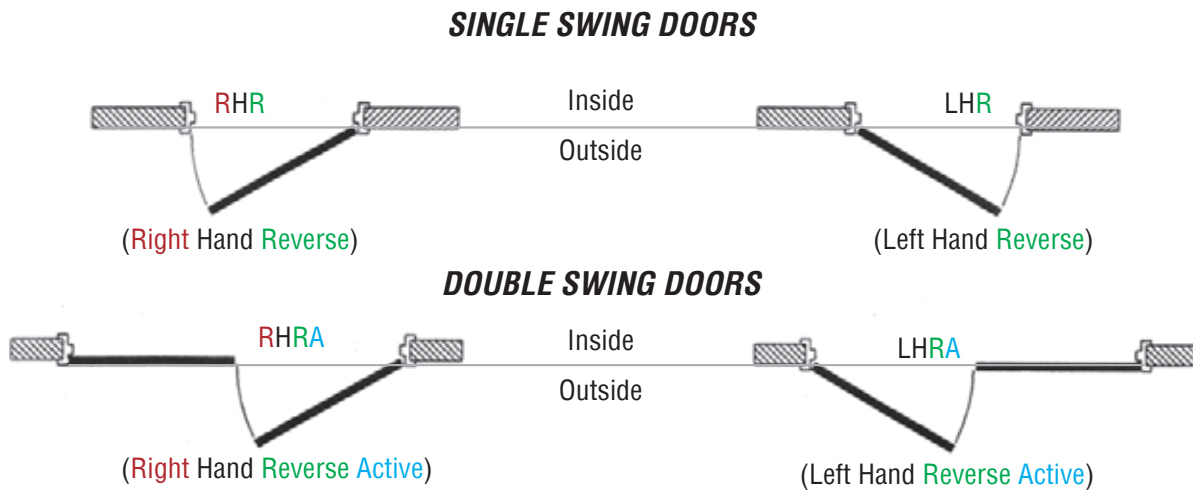

Non-Handed



**Polystyrene
Flush**



Urethane Flush




DOOR DIMENSIONS

TOP




HINGE
SIDE

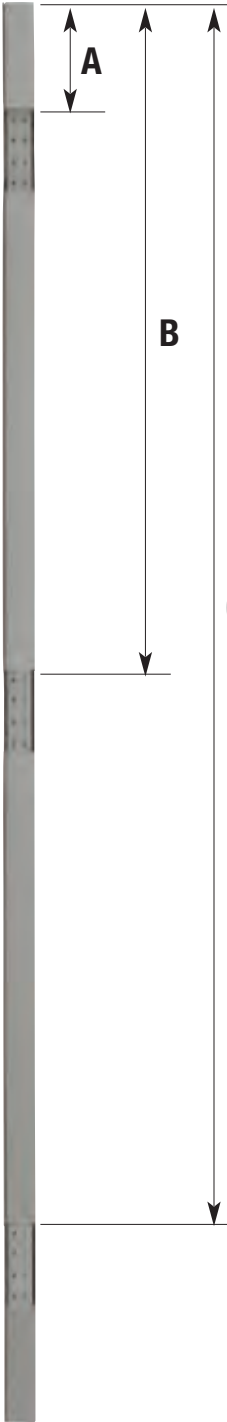

DOOR HEIGHT*	A	B	C	D
6'8"	7-3/8"	37-5/16"	67-1/4"	39-9/16"
7'0"	7-3/8"	39-5/16"	71-1/4"	43-9/16"
OTHER SIZES AND HINGE LOCATIONS AVAILABLE ON REQUEST				

*WITH 3/4" UNDERCUT

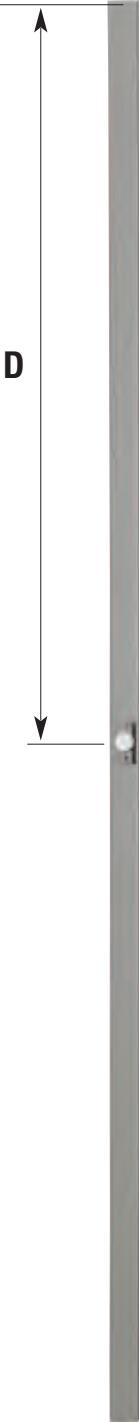

LATCH
SIDE



HINGE
CLOSE
UP

4-1/2"
HINGE
PREP




LATCH
CLOSE
UP

2-1/4"
X
1-1/8"
LATCH
PREP


BOTTOM




SPARTAN DOORS COLOR OPTIONS



**BRONZE BZ
(TIOGA)**



**MEDIUM GRAY
(MSD/PRIMER GRAY)
PR**




**LIGHT GRAY
(TELSTAR)
GR**



**OFF WHITE
(TELSTAR)
OW**



**TRUE WHITE
(TIOGA)
WH**



**BRIGHT WHITE
(TELSTAR)
BW**

**NO PAINT
NP**

NOTE:

ACTUAL COLORS MAY VARY FROM THOSE SHOWN DUE TO LIMITATIONS OF THE PRINTING PRODUCTION PROCESS.

TECHNICAL DATA SERIES

Rev. 2 - April 6, 2022

DOORS & FRAMES – 1

- Hollow Metal
- Spartan Series
- Doors


ABOUT THE PRODUCT

The Spartan Series Doors are designed to meet the architectural requirements for hollow metal doors. This premium door construction combines the strength and dimensional stability of steel with the structural integrity of the a polystyrene core. The continuous bonding of core to metal provides an attractive flat door, free of face welding marks. Windstorm Tests have proven that the Spartan door has integral high resistance to impact damage, low thermal conductivity, and high STC ratings. To meet application, specification and performance requirements, the Spartan doors offer a wide range of specifiable options including sizes, glass lite designs, hardware (mechanical, pneumatic, electrical) preparations and edge constructions.

FEATURES AND BENEFITS

Spartan Series Doors offer the following standard unique features, which enhance long term performance and durability.

1. Polystyrene core system enhances the structural integrity of the door, while significantly reducing the weight.
2. Full height, epoxy filled mechanical interlock edges provide structural support and stability along the full height of the door edges.
3. Patented universal hinge preparations allow for easy field conversion from standard weight (.134) hinges to heavy weight (.180) hinges.
4. 18 gage top and bottom channels provide stability and protection for the top and bottom edges from abuse.
5. Square hinge and lock edges allow for non-handed options and eliminate handing issues in the field.

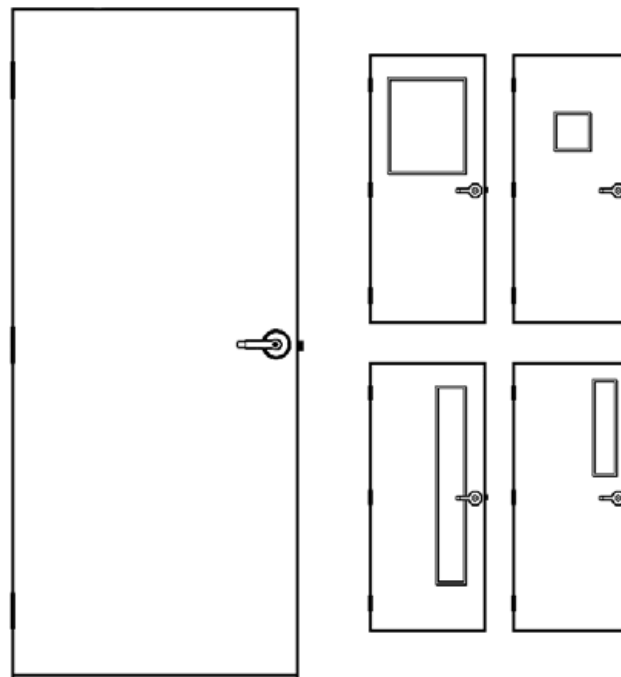

6. All steel glass trim provides a clean, neat, and flush finish with the door surface
7. Factory applied baked on rust inhibiting primer in accordance with ANSI A250.10
8. Calculated R-Value of 7.14

SPECIFICATION COMPLIANCE

1. Door construction for the Spartan Series Hollow Metal Doors meets the requirements of ANSI A250.8-1998 (commonly referred to as SDI-100).
2. Hardware preparations and reinforcements are in accordance with ANSI A250.6-1997. Locations are in accordance with ANSI/DHI A115.

FIRE RATINGS

The Spartan Series doors offer select options for fire rating to comply with both negative and positive pressure standards (ASTM E152, UL-10B, UBC 7-2 and UL-10C).

Please contact Tell representatives to confirm what options are appropriate for your requirements.

Steel Thickness	Opening	Usage Frequency ¹	Frame Applications
16-Gage Galvanealed ²	Interior & Exterior	Extra-Heavy Duty	16 & 14-Gage Steel Frames
18-Gage Galvanealed ²	Interior & Exterior	Heavy Duty	16-Gage Steel Frames
20-Gage Galvanealed ²	Interior & Exterior	Standard Duty	16-Gage Steel Frames

1. Usage frequency is based on ANSI A250.8-1998 2. Reinforcements for galvanealed doors are also galvanealed

MATERIAL


All doors are supplied with a factory applied baked on coat of paint, depending on environmental conditions this factory applied paint may serve as a finished paint or may be finish painted in the field.

PROPRIETARY AND CONFIDENTIAL

This information is the sole property of Tell Manufacturing. Any reproduction in part or as a whole without the written permission of Tell Manufacturing is prohibited.

Core Material	R-Value	U-Value
Polystyrene	7.14	0.14
Polyurethane	11.01	0.091

Core Material	STC-Rating
Polystyrene	33
Polyurethane	31

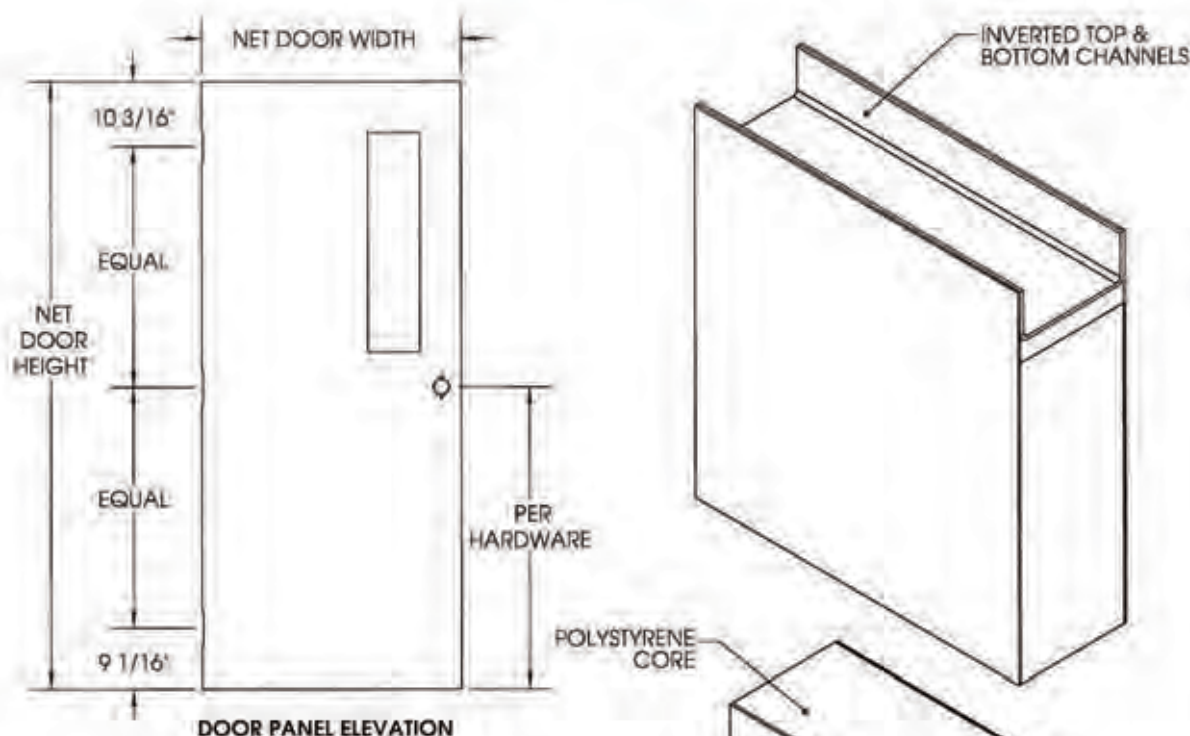


CONSTRUCTION NOTES:


1. Doors are 1 3/4" (45mm) thick.
2. Door opening size maximum:
Single door opening size 4'0" x 8'0" (1219mm x 3048mm)
Double door opening size 8'0" x 8'0" (2438mm x 3048mm)
3. Standard operating clearances (installed in frame):
Head = 1/8" (3mm) to bottom of head or transom panel
Hinge and lock side = 3/32" (2mm) to rabbet on jamb
4. Standard core system:
1.0 lb/ft³ Polystyrene core is laminated to both face sheets with contact adhesive.
5. Hardware preparations: to meet specifications, doors can be prepared for all commercial mortised hardware, and can be factory reinforced for surface applied hardware applications.
 - Lock preps - details and dimensions shown are for cylindrical (ANSI 115.2) type locks or for mortise (ANSI A115.1) locks.

PROPRIETARY AND CONFIDENTIAL


THIS INFORMATION IS THE SOLE PROPERTY OF TELL DOORS & WINDOWS, LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF TELL DOORS & WINDOWS, LLC, IS PROHIBITED.

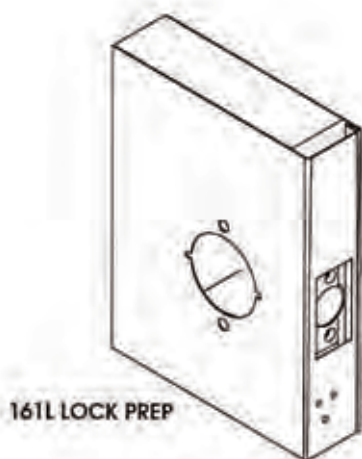


161L LOCK PREP

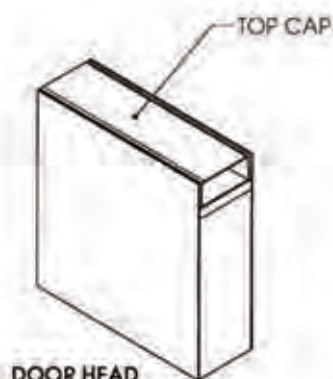

DOOR HEAD

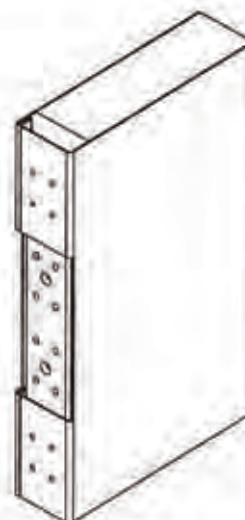

HINGE PREP

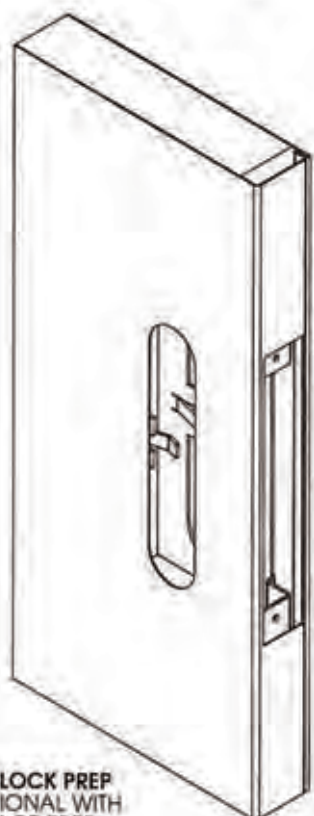

86 LOCK PREP
OPTIONAL WITH
FACE PREP

GENERAL NOTES:

1. Edge construction:
 - Vertical edges (both hinge and lock) are square with a visible seam.
 - Top and bottom edges are closed with inverted 18-gage welded channels. Exterior applications require the addition of snap-in top caps to protect against the weather.
2. Optional cores available in the Spartan Series door construction:
 - Polystyrene for exterior applications in extreme weather conditions.
 - Polyurethane for exterior applications in arctic weather conditions. Not Fire Rated.
3. Standard hardware preparations; standard mortised and reinforced for:
 - Universal hinge preps - 4 1/2" (114mm) patented preparation which allows easy and quick field conversion from standard to heavy weight hinges.
 - Locks - A multitude of standard lock preps are available. The most commonly used with a 47/8" (124mm) strike are 161, 61L and 86.

INSTALLATION:

1. Installation shall conform to the published installation instructions. SDI 105 Recommended Installation Instructions for Steel Frames, and ANSI/DHI A115-IG Installation Guide for Doors and Hardware.
2. Fire Rated Assemblies must be in accordance with NFPA Pamphlet 80. The Authority Having Jurisdiction is the final authority in issues related to the installation and use of installed Fire Rated Doors.

PROPRIETARY AND CONFIDENTIAL

THIS INFORMATION IS THE SOLE PROPERTY OF TELL DOORS & WINDOWS, LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF TELL DOORS & WINDOWS, LLC, IS PROHIBITED.

R-U VALUE INSULATION SPECS FOR SPARTAN DOORS, *PAGE 1 OF 2*

Technical Data Series

Rev. 0 - May 27, 2010




Doors & Frames

+ Hollow Metal

+ Doors

1.1

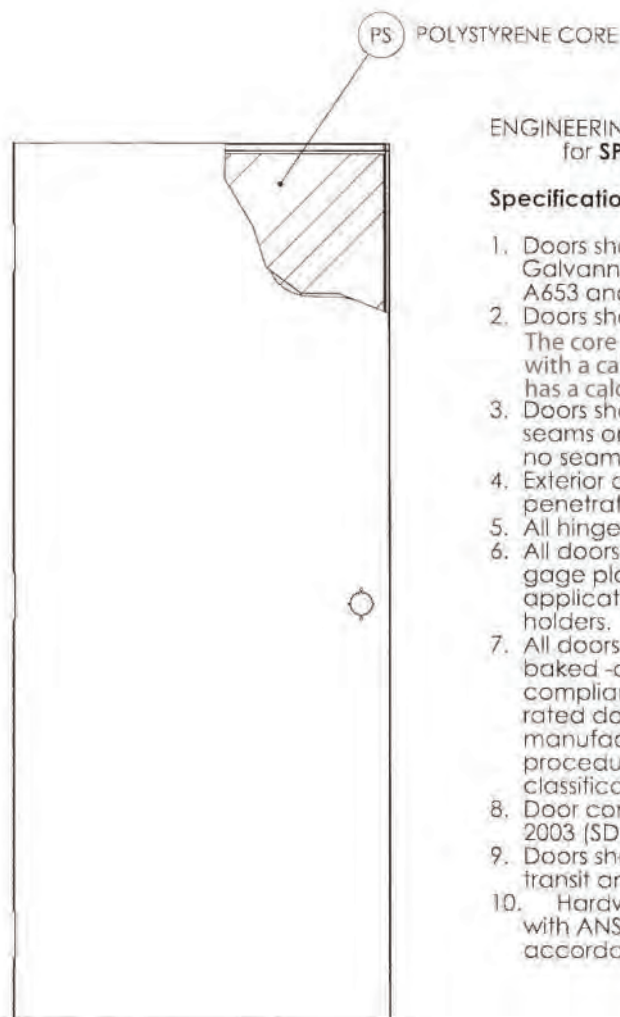

ENGINEERING DETAILS for SPARTAN, TELSTAR, TIOGA Series Doors

Specifications:

1. Doors shall be formed from two 20 or 18 gage Galvannealed Steel per ASTM A924 and A653 and shall be 1-3/4" thick.
2. Doors shall have a core of rigid Polystyrene. The core shall have a nominal density of 1.0 #ft³, with a calculated "R" factor of 7.12. The door panel has a calculated "U" factor of 0.14.
3. Doors shall have vertical mechanical interlocking seams on hinge and lock edges. There shall be no seam on the faces of door.
4. Exterior doors shall be capped to retard moisture penetrating the door.
5. All hinge reinforcements shall be 3/16" thick.
6. All doors shall be internally reinforced with a 12 gage plate both sides of the door for application of surface applied door closures and holders.
7. All doors shall be cleaned and given one coat of baked -on rust- inhibitive metal primer in compliance with ANSI A250.10-2004 12. All fire rated doors, where indicated, shall be manufactured in accordance with UL procedures and bear the appropriate classification mark (label).
8. Door construction complies with ANSI A250.8-2003 (SDI 100)
9. Doors shall be packaged to minimize damage in transit and handling.
10. Hardware reinforcements are in accordance with ANSI A250.6-2003. Locations are in accordance with ANSI/BHMA A156.1 15

R-U VALUE INSULATION SPECS FOR SPARTAN DOORS, PAGE 2 OF 2

Technical Data Series


Rev. D - May 27, 2010



Doors & Frames

• Hollow Metal
• Doors

1.1

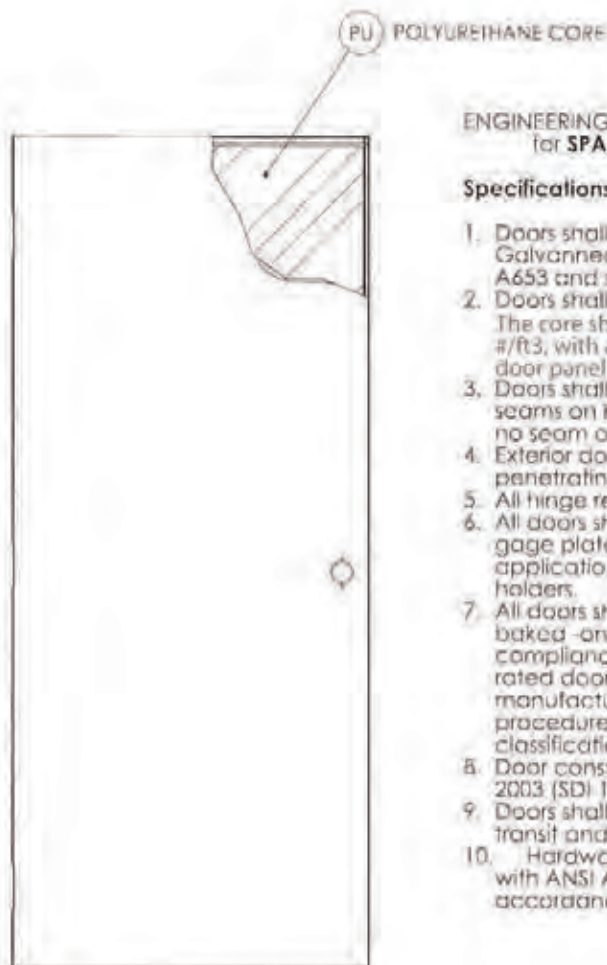

ENGINEERING DETAILS for SPARTAN, TELSTAR & TIOGA Series Doors

Specifications:

1. Doors shall be formed from two 20 or 18 gage Galvanized Steel per ASTM A924 and A653 and shall be 1-3/4" thick.
2. Doors shall have a core of rigid Polyurethane. The core shall have a nominal density of 2.0 #/ft³, with a calculated "R" factor of 11.01. The door panel has a calculated "U" factor of 0.091.
3. Doors shall have vertical mechanical interlocking seams on hinge and lock edges. There shall be no seam on the faces of door.
4. Exterior doors shall be capped to retard moisture penetrating the door.
5. All hinge reinforcements shall be 3/16" thick.
6. All doors shall be internally reinforced with a 12 gage plate both sides of the door for application of surface applied door closures and holders.
7. All doors shall be cleaned and given one coat of baked -on rust - inhibitive metal primer in compliance with ANSI A250.10-2004 12. All fire rated doors, where indicated, shall be manufactured in accordance with UL procedures and bear the appropriate classification mark (label).
8. Door construction complies with ANSI A250.8-2003 (SD) 100.
9. Doors shall be packaged to minimize damage in transit and handling.
10. Hardware reinforcements are in accordance with ANSI A250.6-2003. Locations are in accordance with ANSI/BHMA A156.115.

SPARTAN DOOR HOW TO ORDER CHART

MANUFACTURED STEEL DOOR (MSD SERIES)

HINGE PATTERN OPTIONS

DO—DOMINION / DIAMOND
NH—NO HINGE PREP
TM—TIMELY
CU—CURRIES / PREMIER
PI—PIONEER
CE—CECO
AR—ARWELD REVERSIBLE
A—ARWELD / STEELCRAFT / REPUBLIC

DOOR DESIGNS SEE CHART BELOW**

NCR—NO CLOSER REINFORCEMENT
IDB—INVISIBLE DEAD BOLT PREP
DB—DEAD BOLT

DOOR SERIES

DHM—SPARTAN DOOR / POLYSTYRENE CORE
DHMU—SPARTAN DOOR / HOLLOW METAL / URETHANE CORE

DOOR EDGE AND HINGE TYPES

SQ—SQUARE EDGE W/ CUT THRU HINGES
X—TEXTURED FLUSH
F—SMOOTH FLUSH

FINISH

161—STANDARD CYLINDER PREP 2 3/4" BACKSET
161L—ABOVE WITH PROVISION FOR LEVER THRU-BOLTS
161WR—WIND RATED
86—MORTISE BOX WITH OVAL CUT-OUT & MORTISE EDGE PREP
00—MORTISE BOX WITH NO CUT-OUT; MORTISE EDGE PREP ONLY
B—BLANK; NO FACE OR EDGE PREP

LOCK OPTIONS

NP—NO PAINT
WH—TRUE WHITE (TIOGA)
BW—BRIGHT WHITE (TELSTAR)
OW—OFF WHITE (TELSTAR)
GR—LIGHT GRAY (TELSTAR)
PR—MEDIUM GRAY (MSD / PRIMER GRAY)
BZ—BRONZE (TIOGA)

PAINT OPTIONS
(ALL COLORS NOT LISTED)

DOOR HANDING CHART

OUT-SWING DOORS
SINGLE SWING DOORS

Inside Outside
RHR (Right Hand Reverse) LHR (Left Hand Reverse)

DOUBLE SWING DOORS

Inside Outside
RHR (Right Hand Reverse) LHR (Left Hand Reverse)

SIZE

3070—30" - 3 FEET, 0" INCHES WIDE
18A—18" INCHES TALL
20A—20" INCHES TALL
16A—16" INCHES TALL

GAUGE*

20A—20 GAUGE GALVANNEAL
18A—18 GAUGE GALVANNEAL
16A—16 GAUGE GALVANNEAL

***FIRE RATED DOORS - STANDARD**
— 1.5 HOURS ON 20 GAUGE DOORS
— 3 HOURS ON 18 GAUGE DOORS

DOOR DESIGNS / WINDOW OPTIONS
(ALL OPTIONS NOT LISTED, PLEASE CONTACT CUSTOMER SERVICE FOR MORE OPTIONS)

FLUSH NARROW LITE VISION PANEL HALF GLASS FULL GLASS

VIKING DOORS

Hollow Metal Doors / Fire Rated

Specifications

- **Door** 18 and 16 gauge galvalume
- **Paint** Prime painted
- **Hinge Prep** Non-handed 4-1/2" 10 gauge
Can accommodate heavyweight hinges
- **Construction** Seam welded edge
- **Channels** 16 gauge inverted top and bottom
- **Insulation** Polystyrene core
- **Top Cap** 18 gauge flush
- **Edges** Square hinge and lock edges
- **Closer**
- **Reinforcement** 14 gauge

Options

- **Door Types** Flush, 6 panel
- **Insulation** Honeycomb (special order)
- **Lock Preps** 161, 86 edge and RIM / SVR
- **Galvanized Steel** ASTM A653 / A653-A60



Certifications

3 Hour Intertek / Warnock Hersey, UBC 7-2 (1997):
ASTM E2074 (200): UL 10(b) (2008): NFPA 252 (2008):
UL 10(b) Revision 1 (2009): UL 10(c) (2009):
CAN / ULC S104 (2010):
Built to SDI Specifications ANSI A250.8





Door Dimensions — Fire Rated

3068 Door

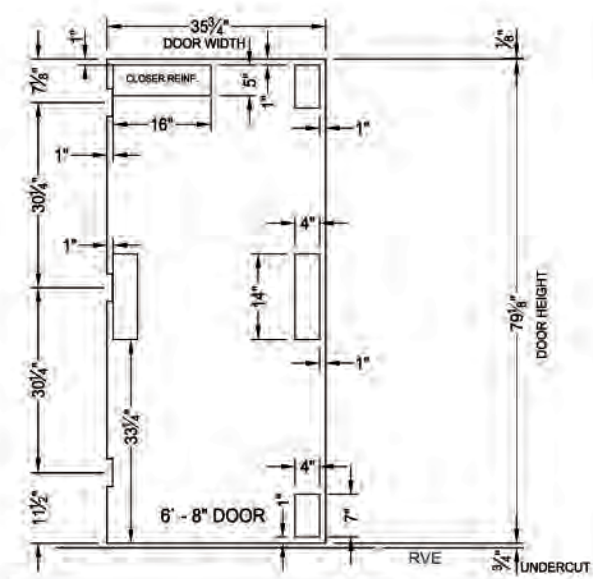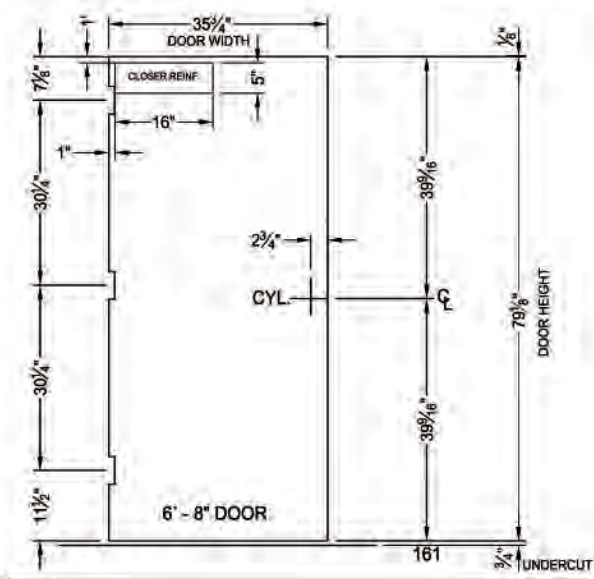

3070 Door

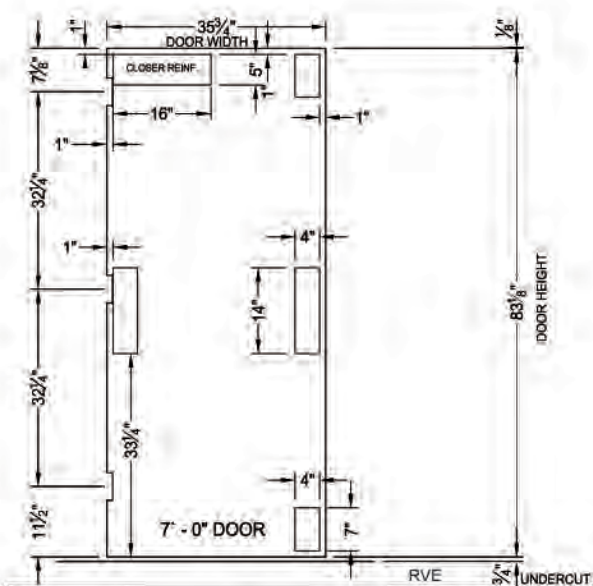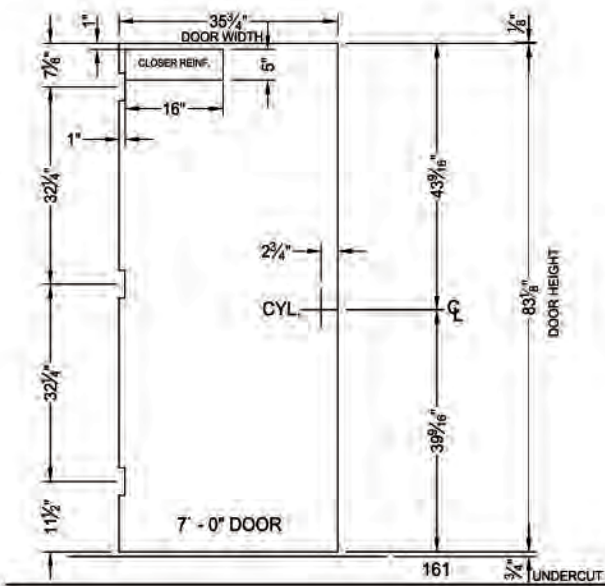



SPARTAN

FRAMES

SPARTAN

FRAMES

DRYWALL & MASONRY

FRAMES

DRYWALL & MASONRY



FRAMES

MADE IN USA

TELL MFG offers **SPARTAN FRAMES** in 16 gauge galvanized steel. Frames are knock-down construction and are designed to be installed on standard and non-standard wall sizes over pre-finished or unfinished drywall.

SPARTAN steel frames are available for 1-3/4" thick doors. They have precision mitered corners, providing a smooth attractive design and easy installation. **SPARTAN FRAMES** come standard with a prime coat, ready to be finished. Factory applied finish coat paint is available in many colors. Contact customer service for pricing and quantities required, for factory finish paint.

TELL MFG follows the same set of performance specifications as other door manufacturers, as set forth in the Steel Door Institute (SDI) requirements.

DRYWALL FRAMES (DW)

STANDARD FEATURES:


All **SPARTAN DRYWALL FRAMES** come with adjustable compression anchors in each jamb. These anchors provide a tight rigid fit in the opening.

- 16 gauge for 1-3/4" doors
- Precision fitted corners
- Galvannealed (standard)
- 7 gauge hinge reinforcements
- Heavy duty strike reinforcements
- Fire rated up to 1-1/2 hours. Available on frame openings up to 8'-0" high and 3'-8" wide single door, 7'-4" double door.
- Meets ANSI standards
- Universal 4 1/2" hinge prep



TYPICAL WALL CONSTRUCTION

Unequal Rabbet Frame

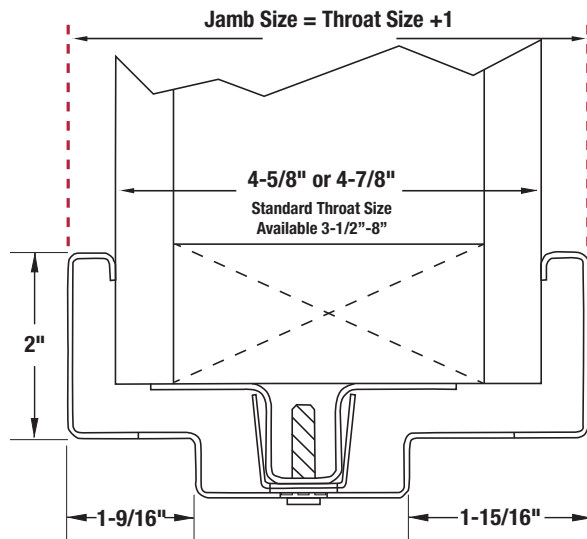

COMPRESSION ANCHOR






ENGINEERING DATA FOR SPARTAN DRYWALL FRAMES SPECIFICATIONS:


1. Will accommodate 1-3/4" doors.
2. Frames are manufactured from 16 gage steel. A1008, or Galvannealed ASTM A653.
3. Frames are knocked down and field assembled with mitered corner joint. Welded frames are available.



4. Integral compression anchors allow easy adjustment.

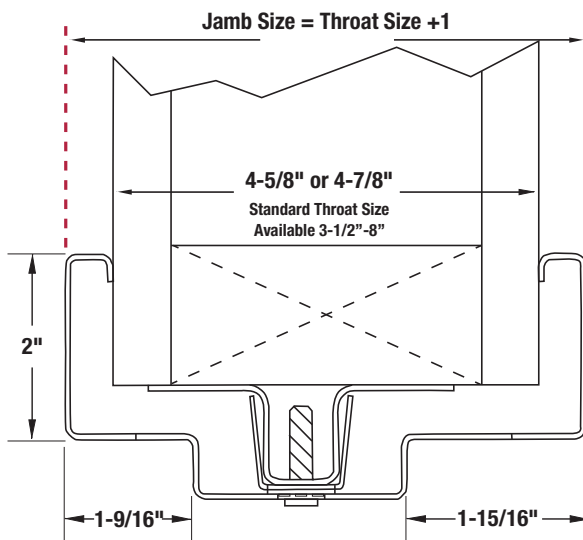

5. Snap-in, strap or dimple base anchors available.

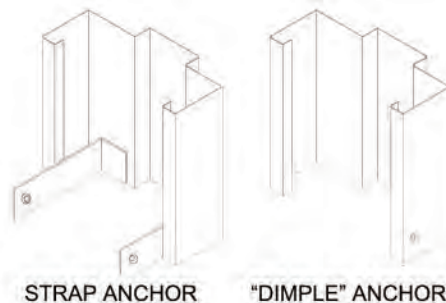

6. Head jambs are reinforced with closer reinforcements when required.

7. Hinge reinforcements are 10 ga (.125min) steel.

8. Strike preparation is 4-7/8 ASA with integral box. Deadbolt strike preps available.

9. Hinge and strike locations are available in manufacturers standard locations. Custom locations are available special order.

10. Frames are prepped for three silencers per single frames.

11. Frames are e-coated with environmentally friendly water base gray. E-coat will serve as primer or top coat. Special colors available on volume orders.

12. Shim plate is attached for on-site vertical shimming.

13. Fire rating (UL) is available for most sizes.

14. Frame structure complies with ANSI A250.8-2003.

15. Hardware preparations, reinforcements and locations comply with ANSI A250.6-2003 and ANSI/BHMA A156.115.

MASONRY FRAMES (MS)



TELL MFG offers **SPARTAN MASONRY FRAMES** in 16 gauge galvanized steel. Frames are knock-down construction designed to be installed as a welded frame, or can be used as non welded. **SPARTAN MASONRY FRAMES** are available for 1 3/4" thick doors as standard. Precision interlocking corners provide a smooth attractive design and allow easy installation. **SPARTAN MASONRY FRAMES** come standard with a prime coat, ready to be finished. Factory applied finish coat paint is available in many colors. Contact customer service for pricing and quantities required, for factory finish paint.

STANDARD FEATURES:


SPARTAN MASONRY FRAMES come with 1/2" returns. Masonry, Wood, and Existing Opening Anchoring (E.O.A.) systems are all available.

- 16 gauge for 1-3/4" doors
- Precision fitted corners
- Galvanized (standard)
- 7 gauge hinge reinforcements
- Heavy duty strike reinforcements
- Fire rated up to 3 hours
- Meets ANSI standards
- Universal 4 1/2" hinge prep


STOCK PROFILE

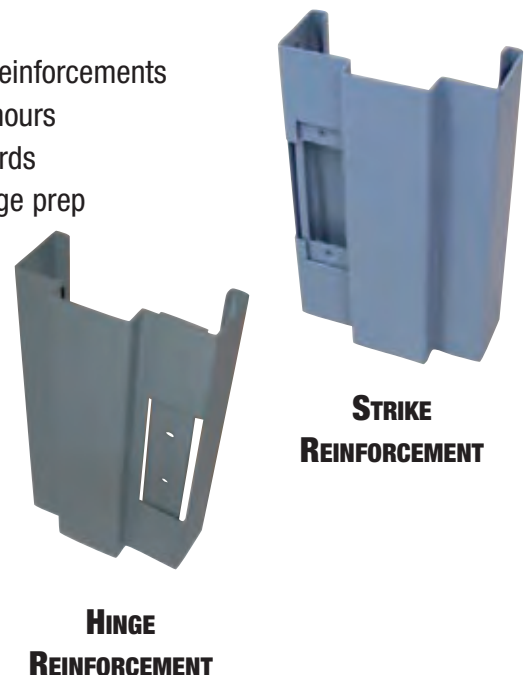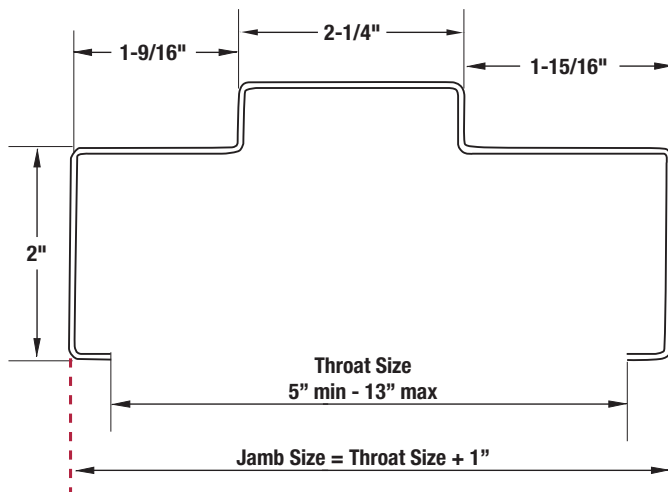

TYPICAL BASE AND WALL ANCHORS

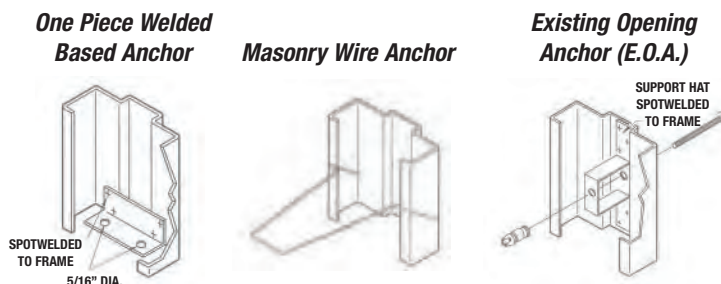

SPARTAN FRAMES COLOR OPTIONS



BRONZE BZ
(TIOGA)



MEDIUM GRAY
(MSD/PRIMER GRAY)
PR




LIGHT GRAY
(TELSTAR)
GR



OFF WHITE
(TELSTAR)
OW



TRUE WHITE
(TIOGA)
WH



BRIGHT WHITE
(TELSTAR)
BW



NO PAINT
NP

NOTE:

ACTUAL COLORS MAY VARY FROM THOSE SHOWN DUE TO LIMITATIONS OF THE PRINTING PRODUCTION PROCESS.

SPARTAN FRAME How To Order Chart

MANUFACTURED STEEL FRAMES (MSD SERIES)

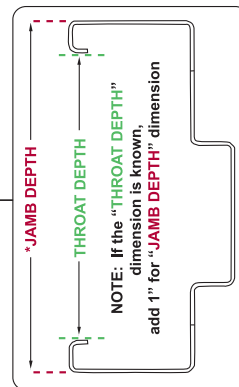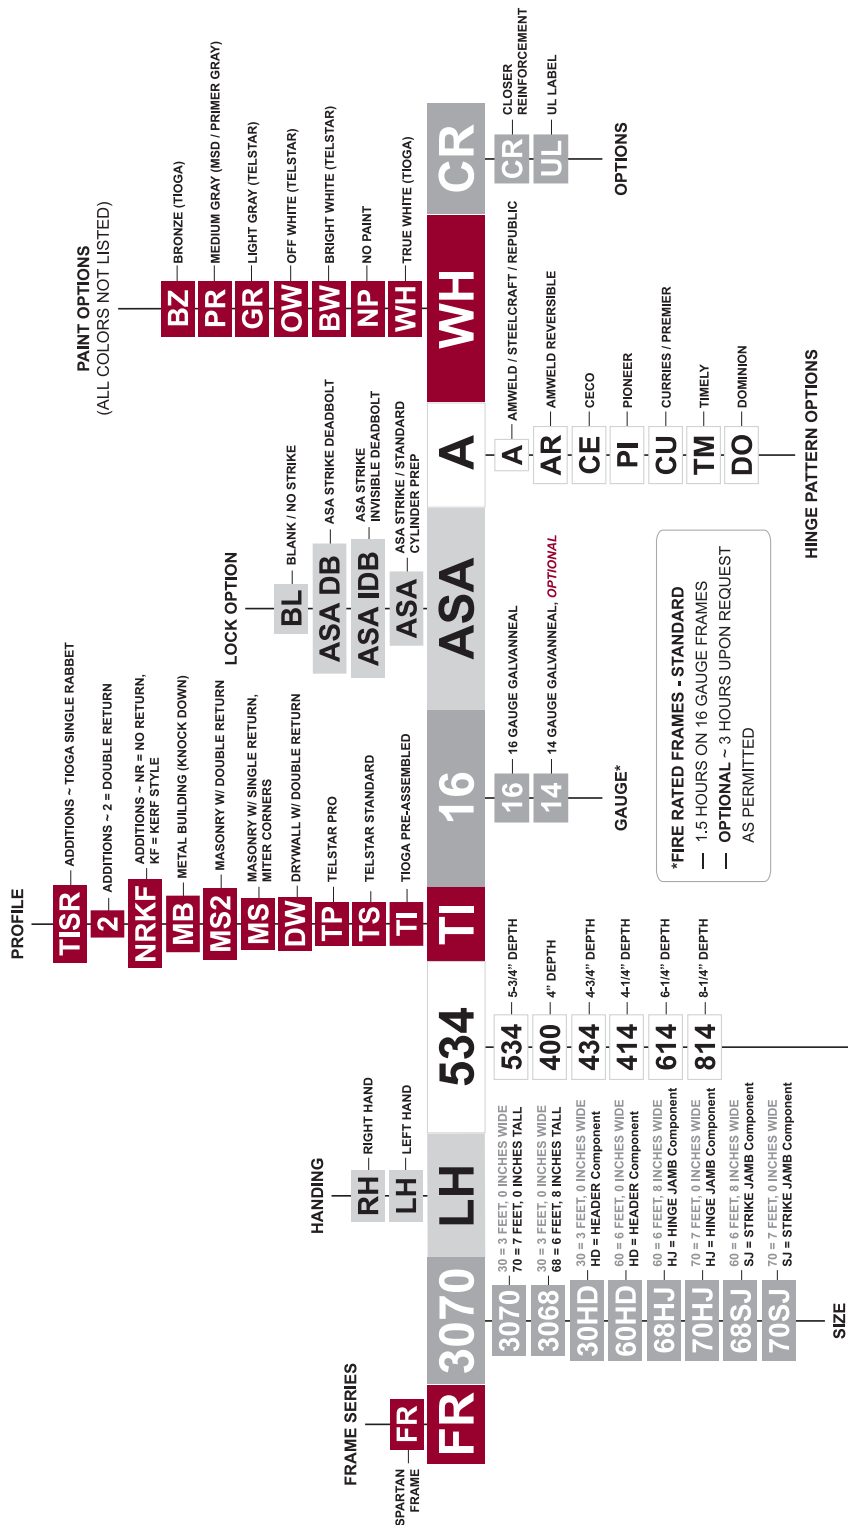


TELSTAR DOORS

***Pre-hung door and frame assembly
161 lock prep
Deadbolt ready
ADA compliant threshold
Sweep and seal
Threshold flashing detaches for
optional installation
Door reinforced for closer
Insulated core
Left or right hand reverse door
20 gauge galvanized door
18 gauge galvanized frame
Non-removable hinge pin***

3 COLORS Available:



Actual colors may vary from those shown due to limitations of the production process.

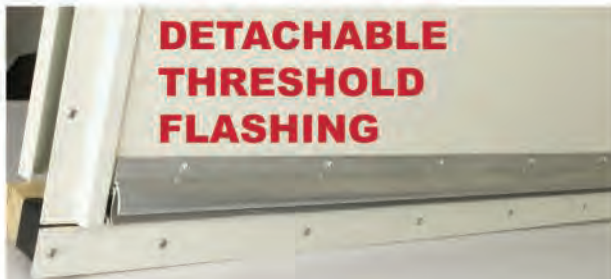

TELL MFG follows the same set of performance specifications as other door manufacturers, as set forth in the Steel Door Institute (SDI) requirements.


**ASA STRIKE
PREP**



**WITH or WITHOUT
10 X 10 LITE KIT**



**ADA COMPLIANT
THRESHOLD**

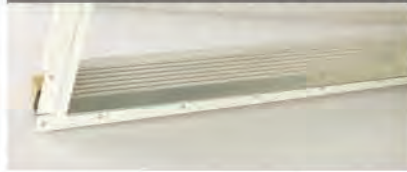

**INVISIBLE
DEADBOLT
PREP**

(Shown without blank plate)



FOAM CORE



**TAMPER
RESISTANT
HINGE**



**LOCKSET &
DEADBOLT
READY**



**EXIT
DEVICE**




**DOOR
REINFORCED
FOR
CLOSER**



**AVAILABLE IN 3 SIZES:
SPECIFICATIONS**

WALL SECTION

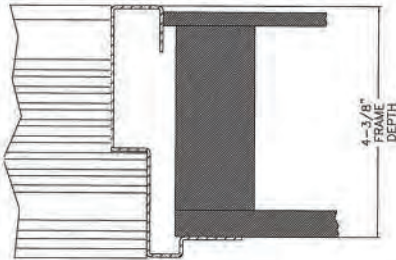

	TELSTAR*	TELSTAR PRO	TELSTAR 70 PRO
Rough Opening Information:	36" x 80"	38" x 81"	38" x 85"
Door Size:	34-3/4" x 78-5/8" x 1-3/4"	35-3/4" x 79-1/8" (3068)	35-3/4" x 83-1/8" (3070)
Exterior Surface Flange:	38-1/2" x 82-3/4" (81-1/4" without threshold flashing)	40-3/8" x 83-5/8" (82-1/4" without threshold flashing)	40-3/8" x 87-5/8" (86-1/4" without threshold flashing)
Interior Wall Overall Frame Size:	35-5/8" x 79-3/4"	37-3/8" x 80-1/2"	37-3/8" x 84-1/2"

***WIND RATED**

Telstar Wind Rating / FLORIDA APPROVAL: FL9277 (34-1/2" X 79" D00R)

Notes:

1. All dimensions are in inches.
2. All wind load deflection testing completed with Tell LC2400 lockset/ D62051 Deadbolt or Tell 6300 Exit Device/ CTL Lever Trim.
3. Threshold sealed to jamb with non-structural sealant.
4. Seal (detail 12) applied to face of soffit.
5. Assembly is to be anchored or secured to spruce/ pine/ fir frame with #10x1" long wood screws. See anchor spacing on page 5.
6. Doors are not approved to be installed in areas requiring water penetration resistance.
7. Door models with 10" x 10" light kit require protection if installed in wind-borne debris regions.
8. Rough opening size: 36 x 80".

Design Pressure tested to ASTM E330. Wind zone ratings calculated from IBC requirements and are for reference only. Follow all local and state code requirements specific to your application.

Design Pressure Rating		Design Pressure (psf)		Wind Zone Rating (mph)			
				Exposure B		Exposure C	
Light Kit	Hardware	+	-	Zone 4	Zone 5	Zone 4	Zone 5
none	Lockset w Deadbolt	+55	-73	170	170	150	150
none	Exit Device (Panic Bar)	+55	-45	150	140	140	120
10x10	Lockset w Deadbolt	+55	-91	170	150	150	140
10x10	Exit Device (Panic Bar)	+41	-37	140	120	120	110

FLORIDA APPROVAL: FL9277

FLORIDA APPROVAL: FL9277

FLORIDA APPROVAL: FL9277

LINK / INSTRUCTIONS to Tell's Approval Listing

Please follow this link:

http://www.floridabuilding.org/pr/pr_app_srch.aspx

Next, please type in Tell Manufacturing's approval number (FL#): FL9277.

This will bring up Tell's specific product approval page.

On this page, if Tell's approval number is clicked on again (lower left hand corner), more detailed information will show.

R-U VALUE INSULATION SPECS FOR TELSTAR DOORS, *PAGE 1 OF 2*

Technical Data Series

Rev. 0 - May 27, 2010




Doors & Frames

+ Hollow Metal

+ Doors

1.1

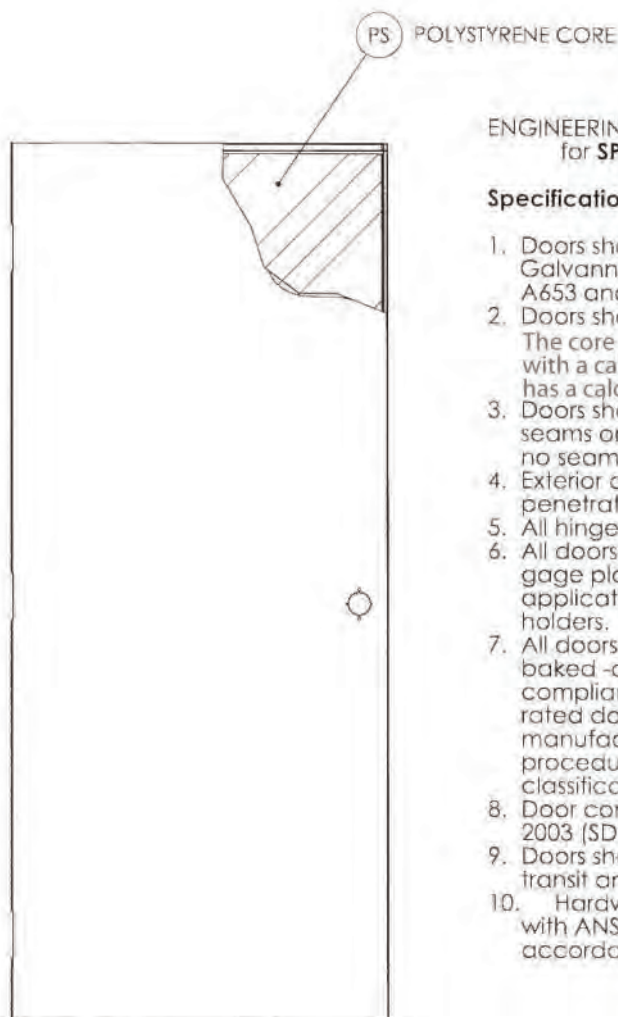

ENGINEERING DETAILS for SPARTAN, TELSTAR, TIOGA Series Doors

Specifications:

1. Doors shall be formed from two 20 or 18 gage Galvannealed Steel per ASTM A924 and A653 and shall be 1-3/4" thick.
2. Doors shall have a core of rigid Polystyrene. The core shall have a nominal density of 1.0 #ft³, with a calculated "R" factor of 7.12. The door panel has a calculated "U" factor of 0.14.
3. Doors shall have vertical mechanical interlocking seams on hinge and lock edges. There shall be no seam on the faces of door.
4. Exterior doors shall be capped to retard moisture penetrating the door.
5. All hinge reinforcements shall be 3/16" thick.
6. All doors shall be internally reinforced with a 12 gage plate both sides of the door for application of surface applied door closures and holders.
7. All doors shall be cleaned and given one coat of baked -on rust- inhibitive metal primer in compliance with ANSI A250.10-2004 12. All fire rated doors, where indicated, shall be manufactured in accordance with UL procedures and bear the appropriate classification mark (label).
8. Door construction complies with ANSI A250.8-2003 (SDI 100)
9. Doors shall be packaged to minimize damage in transit and handling.
10. Hardware reinforcements are in accordance with ANSI A250.6-2003. Locations are in accordance with ANSI/BHMA A156.1 15

R-U VALUE INSULATION SPECS FOR TELSTAR DOORS, *PAGE 2 OF 2*

Technical Data Series

Rev. D - May 27, 2010




Doors & Frames

+ Hollow Metal

+ Doors

1.1

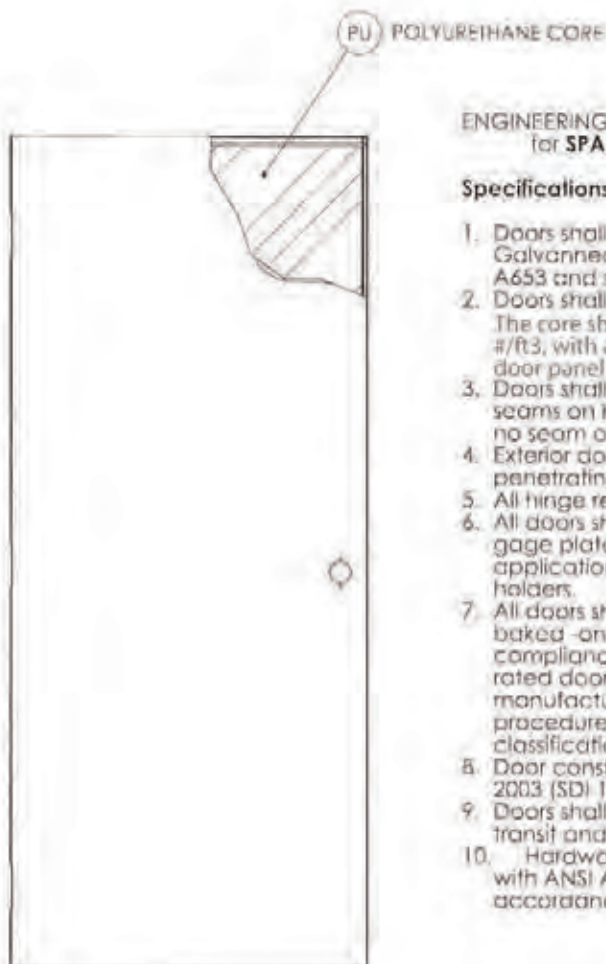

ENGINEERING DETAILS for SPARTAN, TELSTAR & TIOGA Series Doors

Specifications:

1. Doors shall be formed from two 20 or 18 gage Galvannealed Steel per ASTM A924 and A653 and shall be 1-3/4" thick.
2. Doors shall have a core of rigid Polyurethane. The core shall have a nominal density of 2.0 #/ft³, with a calculated "R" factor of 11.01. The door panel has a calculated "U" factor of 0.091.
3. Doors shall have vertical mechanical interlocking seams on hinge and lock edges. There shall be no seam on the faces of door.
4. Exterior doors shall be capped to retard moisture penetrating the door.
5. All hinge reinforcements shall be 3/16" thick.
6. All doors shall be internally reinforced with a 12 gage plate both sides of the door for application of surface applied door closures and holders.
7. All doors shall be cleaned and given one coat of baked-on rust-inhibitive metal primer in compliance with ANSI A250.10-2004 12. All fire rated doors, where indicated, shall be manufactured in accordance with UL procedures and bear the appropriate classification mark (label).
8. Door construction complies with ANSI A250.8-2003 (SDI 100).
9. Doors shall be packaged to minimize damage in transit and handling.
10. Hardware reinforcements are in accordance with ANSI A250.6-2003. Locations are in accordance with ANSI/BHMA A156.115.

How To Order TELSTAR DOOR

DOOR
HOLLOW METAL

DR

STANDARD
SERIES

STANDARD
SERIES

PRO SERIES

PRO SERIES

PRO SERIES

PRO SERIES

DEADBOLT

IDB

DB

DB

DB

DB

DB

DB

WINDOW SIZE

W/10X10

W/10X10

W/10X10

W/10X10

W/10X10

W/10X10

W/10X10

STEEL

OW

GR

BW

WH

BZ

OW

GR

BW

WH

BZ

OW

GR

BW

WH

BZ

SIZE

3068

3068

3068

3070

3068

6070

3068

3068

3068

3070

3068

6070

ROUGH OPENING SIZE

35.5" X 79.75"

71.5" X 79.75"

38" X 81"

38" X 85"

74" X 81"

74" X 85"

ALL DOORS & FRAMES ARE
A40 GALVALUME STEEL

10" X 10",
BLANK /
NO WINDOW

3068
TELSTAR STANDARD

6068
TELSTAR STANDARD

3068
TELSTAR PRO STANDARD

3070
TELSTAR PRO STANDARD

6068
TELSTAR PRO STANDARD

6070
TELSTAR PRO STANDARD

*DOOR HANDING CHART

OUT-SWING DOORS
SINGLE SWING DOORS

Inside

Outside

RHR

LHR

(Right Hand Reverse)

(Left Hand Reverse)

DOUBLE SWING DOORS

Inside

Outside

RHRA

LHRA

(Right Hand Reverse Active)

(Left Hand Reverse Active)



TIOGA DOORS

PRE-ASSEMBLED

COMMERCIAL DOORS

**WIND RATED /
FLORIDA APPROVED**

Standard Features:

- **Door Leaf** 20 gauge insulated door, galvanized, heavy duty hinge reinforcements, non-handed (reversible)
- **Frame** 16 gauge, galvanized, heavy duty hinge reinforcement, non-handed (reversible), standard profile
- **Sub Frame** 16 gauge, galvanized, paintable
- **Hardware** Extra heavy duty lever lock (LC2481 CTL 26D), latchguard, 4.5" x 4.5" BB NRP hinges 26D, threshold ADA compliant, door bottom sweep, adjustable weather seal, adjustable "L" mounting clips
- **SDI Standards** TELL MFG follows the same set of performance specifications as other door manufacturers, as set forth in the Steel Door Institute (SDI) requirements.

Common Features:


- Complete preassembly in factory
- White or Bronze finish
- Heavy duty crating, per job

Optional Features:

- Door(s) may be upgraded to 18 gauge.
- All hardware sold by Tell Manufacturing, Inc. can be added or substituted as an option.
- Masonry system available
- Fire rated system available

TIOGA METAL BUILDING HANDING CHART

Handing of doors and frames present a problem for many, even within the door industry. The below chart is designed to make your choice easy, reducing the chances of error.

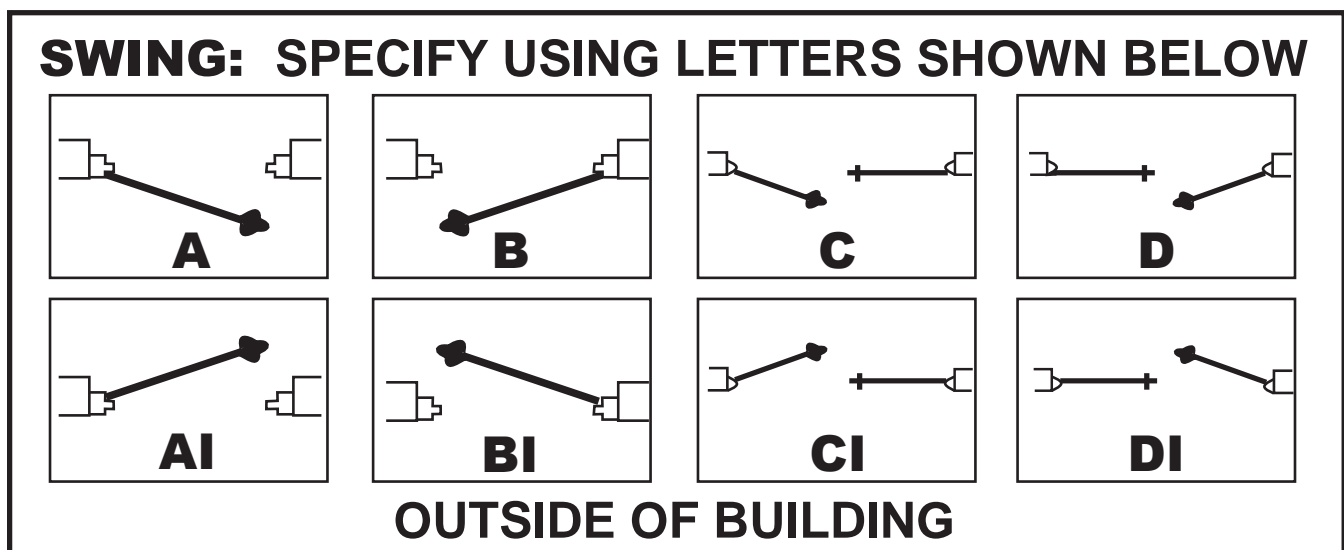

At TELL MANUFACTURING, INC., our goal is to reduce problems that often arise for the builders / erectors. The TIOGA preassembled door system is a result of this effort. With complete factory assembly of all components — door, frame, sub frame and hardware — problems found during field installation are held to a minimum. Typical field installation is usually completed in under 30 minutes. Time normally added for the field installation of numerous options are now a thing in the past. We invite you to "experience the difference" of how the TIOGA door system can benefit your company.

R-U VALUE INSULATION SPECS FOR TIOGA DOORS, PAGE 1 OF 2

Technical Data Series

Rev. 0 - May 27, 2010




Doors & Frames

+ Hollow Metal

+ Doors

1.1

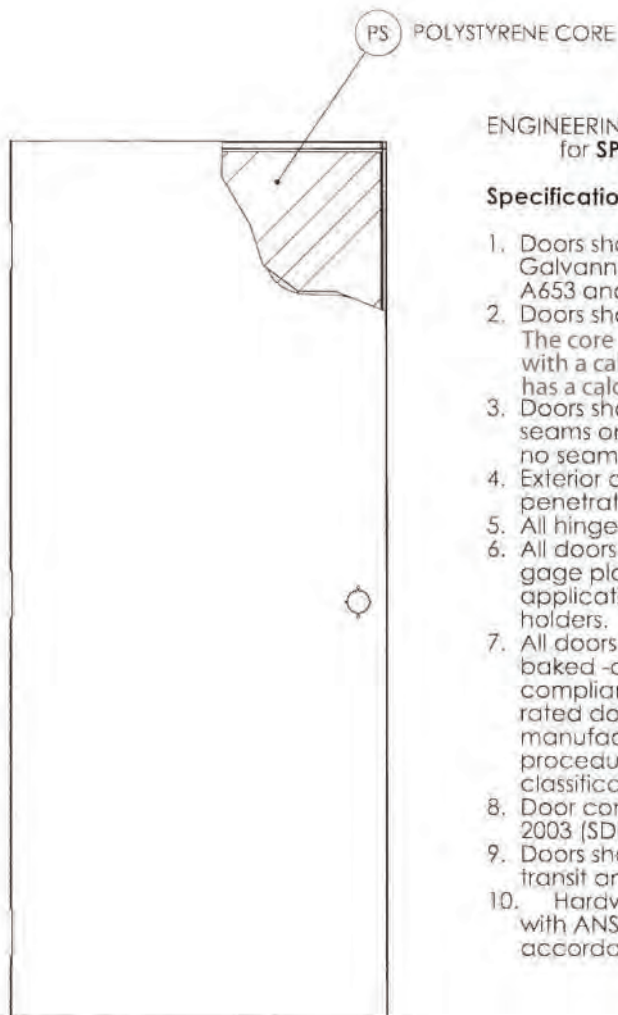

ENGINEERING DETAILS for SPARTAN, TELSTAR, TIOGA Series Doors

Specifications:

1. Doors shall be formed from two 20 or 18 gage Galvannealed Steel per ASTM A924 and A653 and shall be 1-3/4" thick.
2. Doors shall have a core of rigid Polystyrene. The core shall have a nominal density of 1.0 #ft³, with a calculated "R" factor of 7.12. The door panel has a calculated "U" factor of 0.14.
3. Doors shall have vertical mechanical interlocking seams on hinge and lock edges. There shall be no seam on the faces of door.
4. Exterior doors shall be capped to retard moisture penetrating the door.
5. All hinge reinforcements shall be 3/16" thick.
6. All doors shall be internally reinforced with a 12 gage plate both sides of the door for application of surface applied door closures and holders.
7. All doors shall be cleaned and given one coat of baked -on rust- inhibitive metal primer in compliance with ANSI A250.10-2004 12. All fire rated doors, where indicated, shall be manufactured in accordance with UL procedures and bear the appropriate classification mark (label).
8. Door construction complies with ANSI A250.8-2003 (SDI 100)
9. Doors shall be packaged to minimize damage in transit and handling.
10. Hardware reinforcements are in accordance with ANSI A250.6-2003. Locations are in accordance with ANSI/BHMA A156.1 15

R-U VALUE INSULATION SPECS FOR TIOGA DOORS, PAGE 2 OF 2

Technical Data Series

Rev. D - May 27, 2010



Doors & Frames

+ Hollow Metal

+ Doors

1.1




ENGINEERING DETAILS for SPARTAN, TELSTAR & TIOGA Series Doors


Specifications:

1. Doors shall be formed from two 20 or 18 gage Galvanneated Steel per ASTM A924 and A653 and shall be 1-3/4" thick.
2. Doors shall have a core of rigid Polyurethane. The core shall have a nominal density of 2.0 #/ft³, with a calculated "R" factor of 11.01. The door panel has a calculated "U" factor of 0.091.
3. Doors shall have vertical mechanical interlocking seams on hinge and lock edges. There shall be no seam on the faces of door.
4. Exterior doors shall be capped to retard moisture penetrating the door.
5. All hinge reinforcements shall be 3/16" thick.
6. All doors shall be internally reinforced with a 12 gage plate both sides of the door for application of surface applied door closures and holders.
7. All doors shall be cleaned and given one coat of baked-on rust-inhibitive metal primer in compliance with ANSI A250.10-2004 12. All fire rated doors, where indicated, shall be manufactured in accordance with UL procedures and bear the appropriate classification mark (label).
8. Door construction complies with ANSI A250.8-2003 (SDI 100)
9. Doors shall be packaged to minimize damage in transit and handling.
10. Hardware reinforcements are in accordance with ANSI A250.6-2003. Locations are in accordance with ANSI/BHMA A156.115

TIOGA PRE-ASSEMBLED DOOR HOW TO ORDER CHART

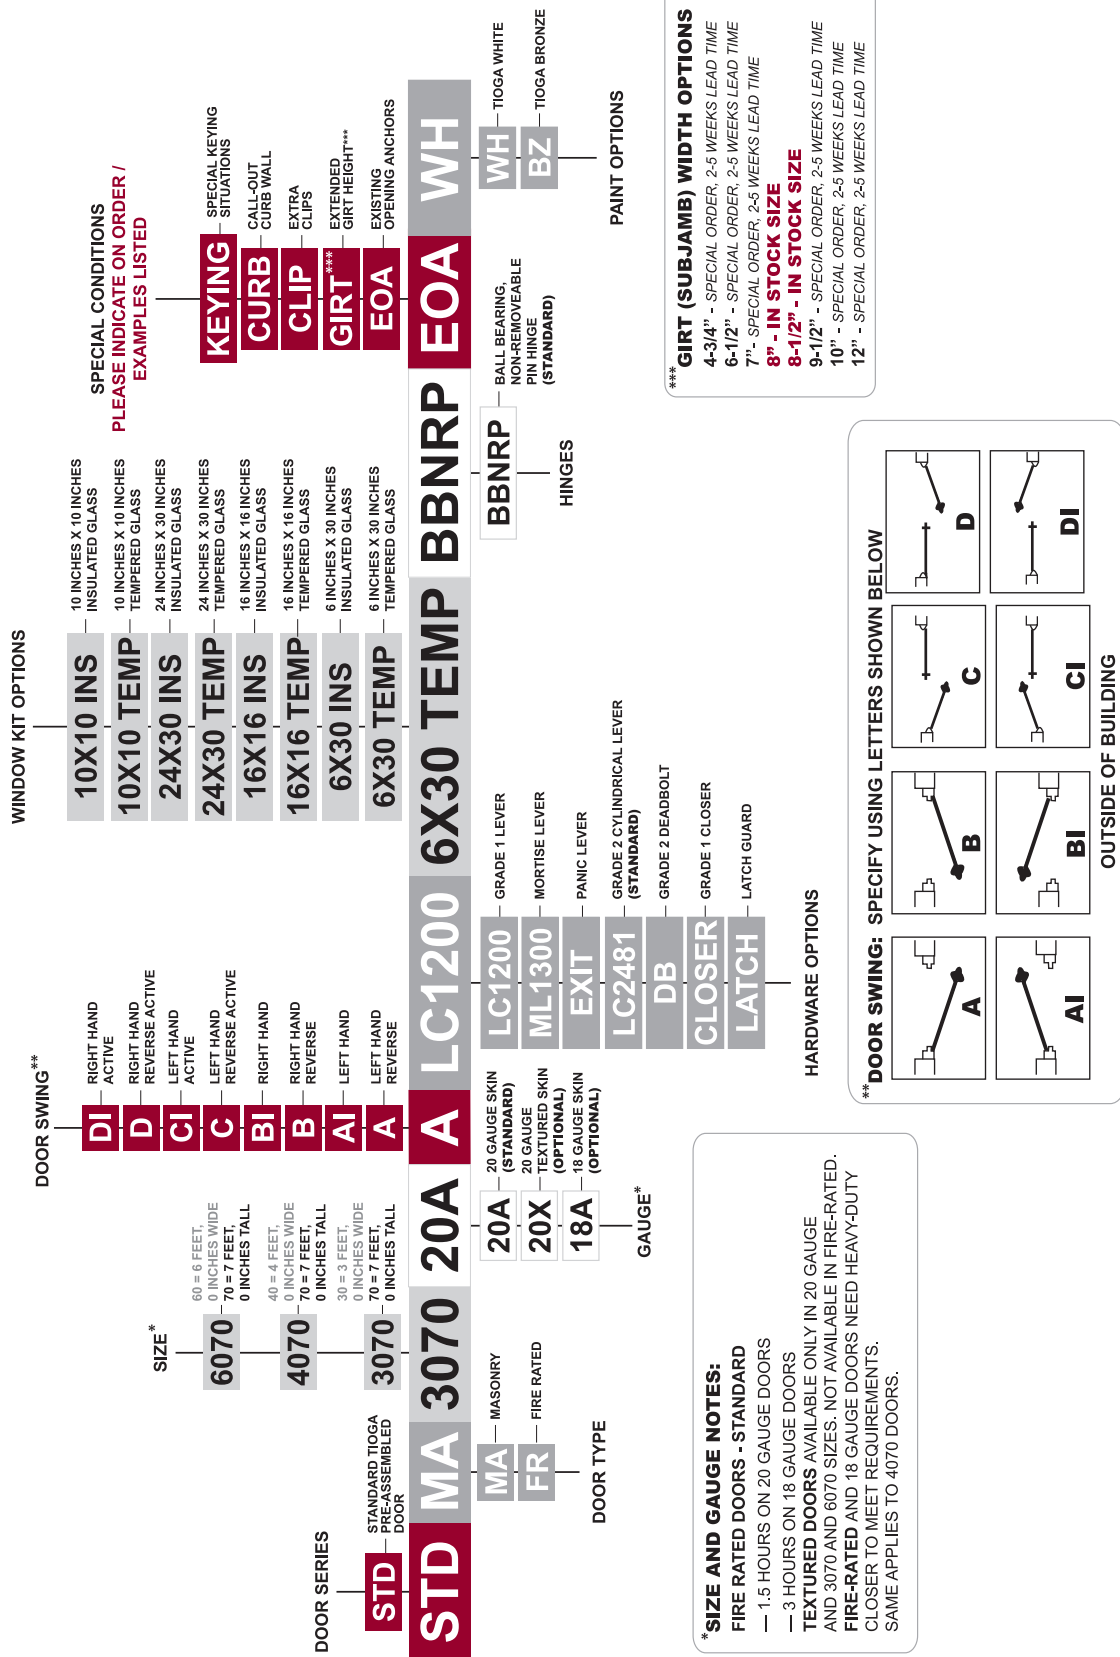

TIOGA KNOCK DOWN DOOR AND FRAME How To Order Chart

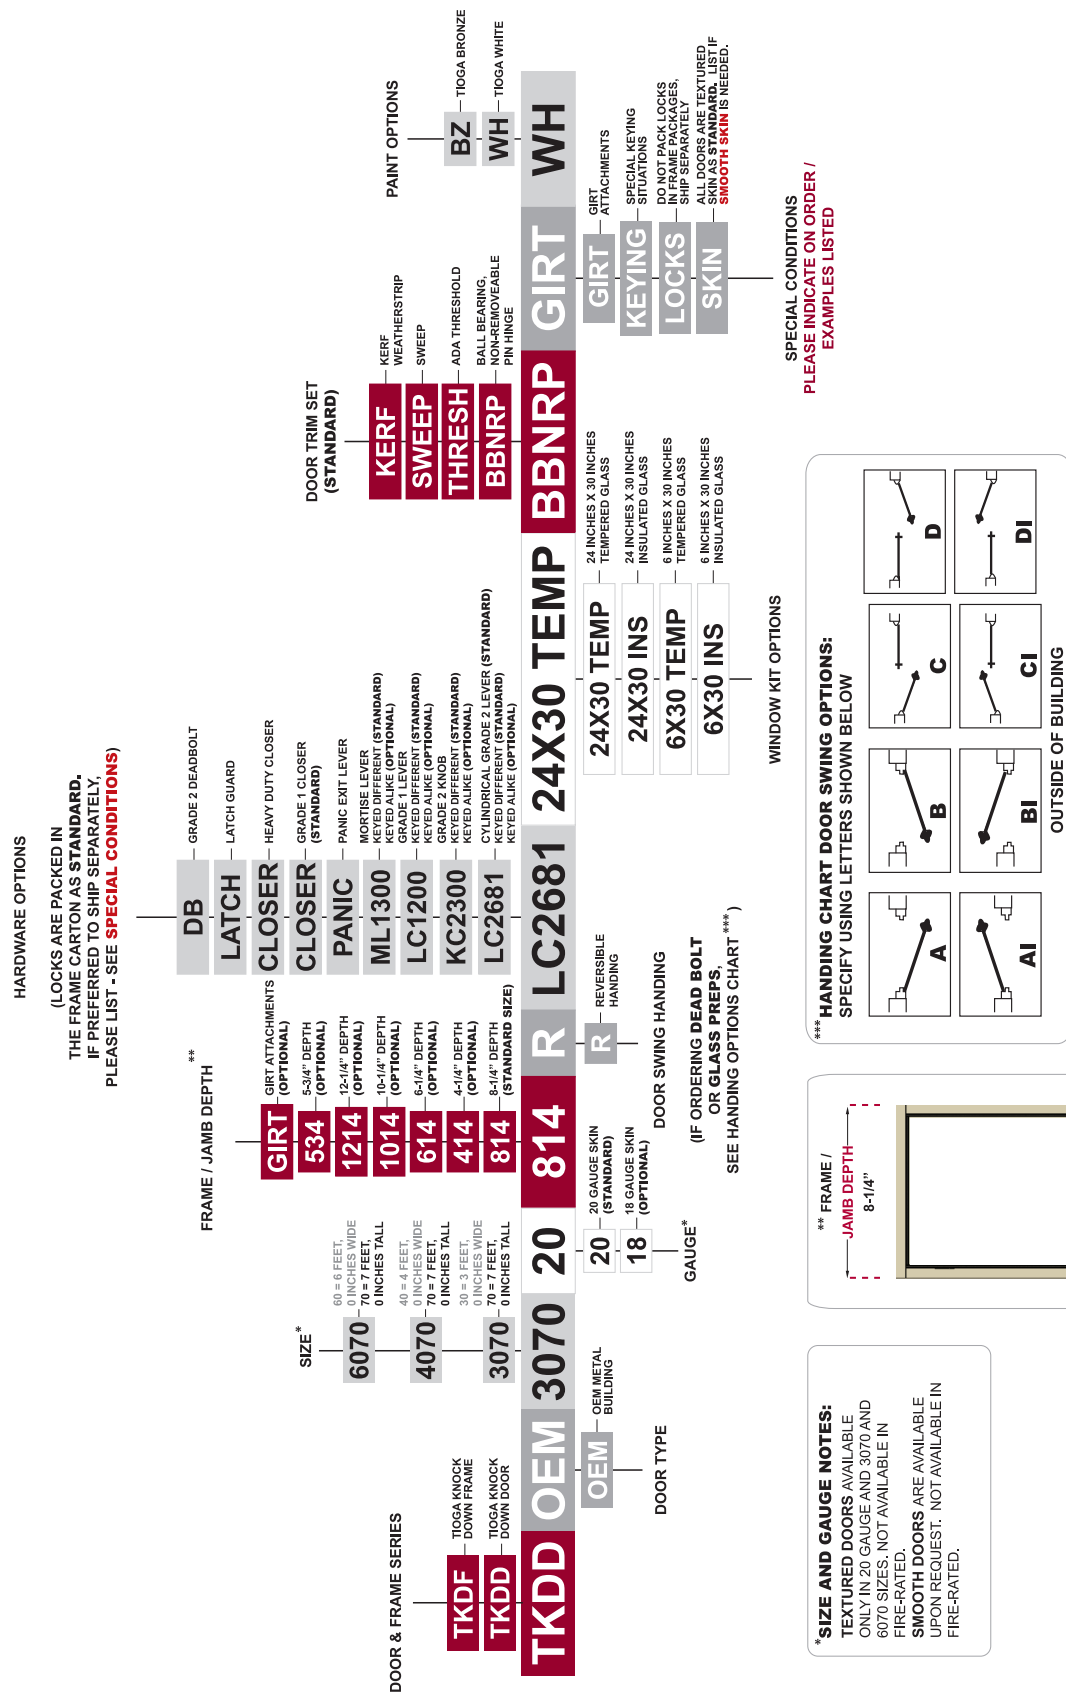

SIZE AND GAUGE NOTES:
TEXTURED DOORS AVAILABLE
ONLY IN 20 GAUGE AND 3070 AND
6070 SIZES. NOT AVAILABLE IN
FIRE-RATED.
SMOOTH DOORS ARE AVAILABLE
UPON REQUEST. NOT AVAILABLE IN
FIRE-RATED.

**HANGING CHART DOOR SWING OPTIONS:
SPECIFY USING LETTERS SHOWN BELOW**

**SPECIAL CONDITIONS
PLEASE INDICATE ON ORDER /
EXAMPLES LISTED**

WINDOW KIT OPTIONS

OUTSIDE OF BUILDING

**** FRAME /**
- JAMB DEPTH - **8'-1/4"**

Wood Doors



Birch Door

- 1-3/4" solid core unfinished hardwood door with a birch veneer
- Standard size 3'0" x 6'8" x 1-3/4"
- Handed
- 20 minute fire rated
- Beveled lock edge
- Standard lock prep for 2-3/4" backset cylindrical lock
- Standard hinge prep for 3 each 4-1/2" x 4-1/2" standard weight hinges
- TELL MFG follows the same set of performance specifications as other door manufacturers, as set forth in the Steel Door Institute (SDI) requirements.



Oak Door

- 1-3/4" solid core prefinished door with an embossed imperial oak veneer
- Standard size 3'0" x 6'8" x 1-3/4"
- Handed
- 20 minute fire rated
- Beveled lock edge
- Standard lock prep for 2-3/4" backset cylindrical lock
- Standard hinge prep for 3 each 4-1/2" x 4-1/2" standard weight hinges

Wood Door How To Order Chart

DOOR SERIES

WD

THICKNESS

138

134

DOOR DESIGNS / WINDOW OPTIONS
(ALL OPTIONS NOT LISTED, PLEASE CONTACT
CUSTOMER SERVICE FOR MORE OPTIONS)

FLUSH

FULL GLASS

NARROW LITE

VISION PANEL

BIFOLD

DOOR SIZES AVAILABLE

3068

3070

DOOR PREP

AMWELD

TM

CE

FINISH
(OTHER FINISHES AVAILABLE)

UNF

CLR

VENEER
(OTHER VENEERS AVAILABLE)

WALNT

PSROK

IMPOK

BIR

CORE

90

60

45

20

PC

HC

HANDING
(OPTIONAL)
SEE HANDING
CHART**

LHR

RHR

RH

LH

WOOD DOOR

WD

3068

134

F

BIR

UNF

HC

A

LH

30 = 3 FEET,
0 INCHES WIDE,
68 = 6 FEET,
8 INCHES TALL

30 = 3 FEET,
0 INCHES WIDE,
70 = 7 FEET,
0 INCHES TALL

FLUSH

FULL GLASS

HALF GLASS

NARROW LITE

VISION PANEL

BIFOLD

WALNUT EMBOSSED

PLAIN SLICED RED OAK

IMPERIAL OAK EMBOSSED

BIRCH

90 MINUTE MINERAL CORE (FIRE RATED)

60 MINUTE MINERAL CORE (FIRE RATED)

45 MINUTE MINERAL CORE (FIRE RATED)

20 MINUTE PARTICLE CORE (FIRE RATED)

PARTICLE CORE


HOLLOW CORE

LEFT HAND REVERSE (OUT-SWING)

RIGHT HAND REVERSE (OUT-SWING)

RIGHT HAND (IN-SWING)

LEFT HAND (IN-SWING)

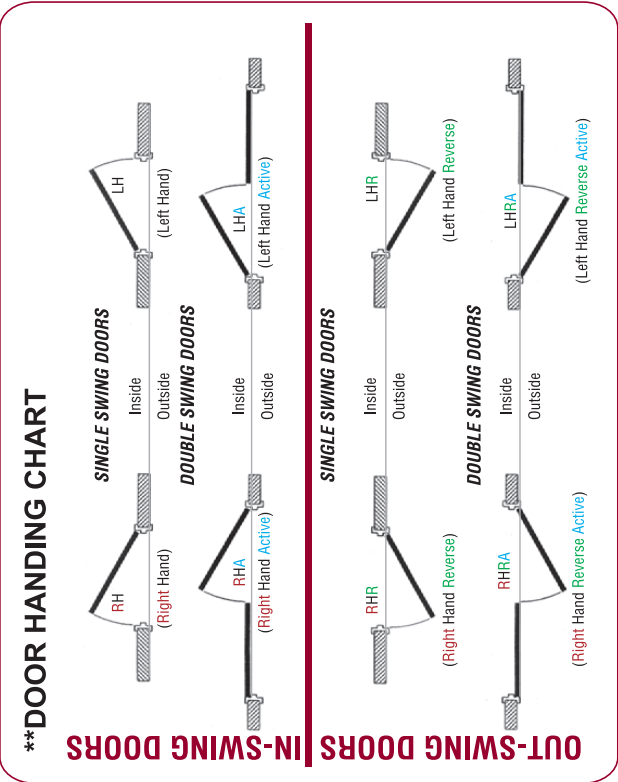

PREFINISHED DOOR FRAMES

STEEL



INCOMPARABLE STEEL DOOR FRAME SYSTEMS FROM THE LEADER

- **Quality.** Assured by Timely's 30 plus trendsetting years in the field.
- **Versatility.** 5 casing design options, 6 stocking and 29 custom colors.
- **Safety.** Full 90-minute fire rating available.
- **Strength & Beauty.** Sturdy full perimeter anchoring, plus matching borrowed lites and sidelites.



TIMELY
PREFINISHED STEEL DOOR FRAMES
A DIVISION OF S.D.S. INDUSTRIES, INC.

- TELL MFG follows the same set of performance specifications as other door manufacturers, as set forth in the Steel Door Institute (SDI) requirements.


FOR ADJUSTABLE AND STANDARD TIMELY FRAME INSTALLATION VIDEOS, PLEASE GO TO OUR WEBSITE =
http://www.tellmfg.com/Timely_Doors_ADJ_FRAME_INSTALL_VIDEO.html

Proof By Comparison: Timely Is Number 1

Start with Timely's fastening system. It gives these prefinished steel frames a door holding capability that equals or surpasses a 16 gauge one-piece hollow metal frame. This super strong full-perimeter fastening system, complete with accessories, is available in 18 or 20 gauge cold rolled steel. Installation is easy, due to a patented casing clip system.

Timely prefinished door frames with applied-after casings are also considerably more versatile than hollow metal frames. With Timely, the most specialized design criteria are met by a wide selection of "snap-lock" trims in aluminum, PVC, stainless steel, steel and wood (wood trims supplied by others) which can be easily fastened to the basic steel frame. Timely also fulfills requirements for lead-lined, fire-resistant aluminum, steel adjustable or pocket door frames.

When it comes to economy, Timely surpasses hollow metal frames too. Because Timely frames are prefinished, they can be installed after the walls are painted eliminating the hazards associated with job-site painting, which can result in costly spills, poor touch-ups and disruption of work schedules.



The Timely touch enhances major office buildings across the country.



Timely frames are frequently specified for apartment communities.




Timely is the architect's choice for Class A projects.

Timely offers maximum savings in both labor and materials. The frames are adaptable to many different wall sizes and conditions and sleeve over the wall after the wall is finished. Installation can be accomplished in under 15 minutes.

Timely prefinished steel door frames have the flexibility to go wherever your imagination takes you in color coordination and interior design.

For unmatched quality and performance, look to the proven leader—Timely.

High Performance Features



The total opening concept from Timely incorporates unique features, adding up to economical, attractive and stronger door installations.

1. Casing Corner Connector holds mitered corners tight. MiterGard™ featured on TA-8 casings.

2. Adjustable Strike permits full 1/4" adjustment, assures positive, rattle-free fit.

3. Full Width Aligning Tabs correctly align uprights and header.

4. Pre-punched Fastener Holes mean easier fastening.

5. Individually Attached Casing Clips assure a snug casing fit that follows the irregularity of walls.

6. Alignment Slot oval punch-outs allow visual check of frame spacing and adjustment during installation.

7. 14 Ga. Hinge Reinforcement Plates are factory attached to give hinge strength of a 12 ga. frame.

8. TA-10, TA-12, TA-25 Reinforcement Brackets are one of many reinforcements for door guards, closers and other hardware applications. Reversible Hardware Locations mean no handing in 6'8" heights.

A Wider-Than-Ever Choice of Colors

Timely finishes make ordinary painting obsolete. That's because it's a baked-on polyester base paint, applied in coil form, assures superior durability, performance and appearance.

Also, Timely's optional chromatic electro-galvanized base under the finished paint gives added protection to exterior and high-humidity installations.

Quoted pricing is based on Western White and Browntone, unless other colors are specified. Orders for special finishes must be accompanied by a color sample for approval, pricing and lead time. For bright polished stainless steel or brass frames, specify the Elite Series.

Timely Finishes

— Standard Price —




BROWNTONE (SC101)*



WESTERN WHITE (SC107)*




AUTUMN BROWN (SC102)



BLACK (SC103)*



STONE GRAY (SC106)



ALUMATONE (SC108)

*Available for Adjustable Frames in powder coat

Pre-Matched Custom Finishes

(Custom color matching also available.)

Submit color chip. Consult factory for pricing.

WHITE WHITE (CC301)	WHITE SMOKE (CC302)	BONE CHINA (CC303)	DESIGNER WHITE (CC304)
CHARCOAL (CC401)	CAPE COD GRAY (CC402)	NEUTRAL GRAY (CC403)	NICKEL (CC404)
DRIFTWOOD (CC501)	SANDY BEACH (CC502)	CAMEO BEIGE (CC503)	COZY PEACH (CC504)
BROWN SUGAR (CC601)	COCO (CC602)	DOESKIN (CC603)	HARVEST MOON (CC604)
CORDOVAN (CC701)	RUBY RED (CC702)	ROSE DUST (CC703)	MAUVE MIST (CC704)
PACIFIC BLUE (CC801)	TWILIGHT (CC802)	COUNTRY BLUE (CC803)	JADE (CC901)
KENTUCKY GRASS (CC902)	MIAMI WATERS (CC903)	MALIBU GREEN (CC904)	

Elite Series

BRIGHT SOLID BRASS (ES201)	STAINLESS STEEL 430 BRIGHT (ES204)	304 #4 BRUSHED STAINLESS STEEL (ES206)
BRIGHT PLATED BRASS (ES202)		

Colors shown may vary slightly

New Worlds Of Door Frame Design Options

The Timely frame system offers the advantages of a patented, sustained-tension clip which holds the casing securely to the wall creating tight miters. This system permits the use of the following 5 versatile casing profiles and a choice of wood trims supplied by others:

TA-8 Standard Steel Casing, widely admired for its classic profile, enhances any home or office setting.

TA-30 Colonial Steel Casing adds that special warmth which distinguishes quality-built assisted living, hotels and motels, offices, apartments and homes. New TA-31N corner piece also featured.

TA-35 PVC Colonial Casing, a delicately defined extruded PVC molding, is quickly applied to Timely's clip system. Painted or in wood grain finishes.

TA-28 Aluminum Casing is a full width aluminum casing without a reveal offering the advantages of a steel door frame.


TA-23 Aluminum Casing displays the crisp lines of an aluminum trim, while providing the economy and strength of steel.



Adjustable Frame

Timely Delivers Unsurpassed Quality Wherever It's Needed

The Timely frame is designed for fast positioning and accurate fit which results in dependable operation. Using these unique features, the door frame can be installed in less than 15 minutes in most common walls. It is simply a matter of sleeving the frame over the wall, hanging the premachined door, fastening the frame and snapping on the casing to conceal fasteners. Timely prefinished steel door frames can be attached to just about any type of construction material including wood stud and drywall (as illustrated here) plus:



- Wood Stud/Stucco/Drywall
- Wood Stud/Brick/Drywall
- Steel Stud/Drywall
- Masonry/Subbuck
- Pocket Door Trim
- (Adjustable Frame) Wood Stud/Drywall/Sound Board

Adjustable Frame

For walls with varying thicknesses, the Timely Adjustable Frame utilizes a slide guide system that allows the frame to adjust from 3 3/4" to 9 1/8" with only 3 closure strips to fit any wall within this range.

Code Acceptability, Certification

SINGLE SWING FRAMES

	MAXIMUM OPENING SIZE		WALL SIZE		FRAME SERIES
	WIDTH	HEIGHT	MIN	MAX	
20 MIN. *	4/0	10/0	3 1/4"	13"	C
45 MIN. "C" LABEL	4/0	9/0	3 1/4"	13"	S,C,M,A,**E
90 MIN. "B" LABEL	4/0	9/0	3 1/4"	13"	S,C,M,A,**E

*Negative pressure only

**Maximum openings over 4/0 x 8/0.

FULL BOUND WITH DOOR

	MAXIMUM OPENING SIZE		WALL SIZE		FRAME SERIES
	WIDTH	HEIGHT	MIN	MAX	
45 MIN. "C" LABEL	4/0	5/0	3 1/4"	13"	S,C,E
90 MIN. "B" LABEL	4/0	5/0	3 1/4"	13"	C

PAIR FRAMES

	MAXIMUM OPENING SIZE		WALL SIZE		FRAME SERIES
	WIDTH	HEIGHT	MIN	MAX	
20 MIN.	For 20 Min. Pair, use C Label Requirements				
45 MIN. "C" LABEL	8/0	9/0	3 1/4"	13"	S,M,C,E
90 MIN. "B" LABEL	8/0	9/0	3 1/4"	13"	S,M,C,E

ADJUSTABLE FRAMES

	MAXIMUM OPENING SIZE		WALL SIZE		FRAME SERIES
	WIDTH	HEIGHT	MIN	MAX	
45 MIN. "C" LABEL	6/0	8/0	3 1/4"	9 1/8"	A
90 MIN. "B" LABEL	6/0	8/0	3 1/4"	9 1/8"	A

GENERAL INFORMATION

All ratings are usable for steel stud, wood stud, or masonry construction (steel subbuck).

Wood or aluminum casing does not affect ratings.

Single frames not prepared for strikes must use TA-12 rim panic strike reinforcement.

Fire ratings not approved for deadbolt strike only.

Reinforcements are required when using door closers to maintain fire ratings.

Fire ratings not approved for 1 3/8" frames.

All ratings approved for category "A" and "B" doors with category "G" edge sealing.

Solid brass not rated.

SIDELITE, BORROWED LITE AND GLAZED TRANSOMS "S" or "C" GAUGE.

Wood Casing permitted on sidelites or borrowed lites for 20 Min. without vertical or horizontal mullions in glass area.

GLASS STOP SIZE	RATING	MAX ASSEMBLY SIZE 10'-1"W X 10'-1" H		WALL SIZE		MAX GLASS AREA
		WIDTH	HEIGHT	MIN	MAX	
1/2	45 MIN	24"	107"	3 3/8"	13"	*2568 SQ IN
**1/2	45 MIN	36"	54"	3 3/8"	13"	1296 SQ IN
NO STOP						
3/4	45 MIN	36"	54"	3 3/8"	13"	1296 SQ IN
GLASS STOP SIZE	RATING	MAX ASSEMBLY SIZE		MULLIONS NOT PERMITTED WALL SIZE		MAX GLASS AREA
		WIDTH	HEIGHT	MIN	MAX	
1/2	20 MIN	36"	36"	3 3/8"	13"	1296 SQ IN
**1/2	60 MIN	36"	36"	3 3/8"	13"	1296 SQ IN

Do not exceed maximum assembly size.

*Most building codes limit glass area to 1,296 sq. in.

Do not exceed 1,296 sq. in. without verifying with local code authorities prior to specifying or ordering

**Must be caulked using 100% Pure Silicone Sealant.

***Must use Firelite® glazing and install in a 5/8" wide glazing recess with 100% Pure Silicone Sealant.



Timely Sidelites and Borrowed Lites

The beauty and economy of the Timely frame sidelite and borrowed lite system are available to meet most glazed opening requirements. And because they're prefinished, they can be applied over finished walls. As a result, costly time delays and special fabrication are avoided.

Positive pressure testing available.

CONDENSED ARCHITECTURAL SPECIFICATIONS (Detailed specification available.)

PART 1 GENERAL

1.1 Section Includes

- A. Fire-rated, prefinished steel door frames and sidelights.

1.2 Related Sections

- A. See Division 8 for related doors and hardware.

1.3 References

- A. Intertek Testing Services (WHI).
- B. Underwriter's Laboratory (UL).

1.4 Submittals

- A. Product Data: Indicate frame configuration and finishes.
- B. Shop Drawings: Indicate frame elevations, reinforcements, anchor types and spacings, location of cut-outs for hardware and finish.
- C. Provide copies of manufacturer's standard warranty.

1.5 Quality Assurance

- A. Manufacturer: A firm with no less than 10 years experience in the manufacturing of the principal materials for the required work.
- B. Installer: A firm with no less than 5 years experience in the installation of pre-finished frames as demonstrated by previous successful installation.

1.6 Regulatory Requirements

- A. Fire rated frame construction: Conform to UL 10C standards

1.7 Delivery, Storage and Protection

- A. Store frames in dry protected area off the ground. Do not cover with tarp. (Will cause moisture chamber).
- B. Package pre-finished frames individually with all surfaces protected against shipping and handling damage until time of installation.

PART 2 PRODUCTS

2.1 Manufacturers

- A. Timely Industries, 10241 Norris Ave., Pacoima, CA 818 492 -3500.

2.2 Frames

- A. (18), (20), gage, (Steel), (Brass), (Stainless Steel).

2.3 Casings

- A. Provide (Steel), (Aluminum), (Brass), (Steel), (PVC), (Wood), (___) casings with corner alignment clips as shown on drawings.

2.4 Fabrication

- A. All frames formed from cold rolled sheet steel conforming to ASTM-A366.
- B. Roll form or break frames to standard shapes as shown on drawings.
- C. Prepare frames for heat-treated, zinc-plated casing retainer clips. Clips mechanically fastened for secure, properly aligned installation of casing.
- D. Provide holes on perimeter of frame for insertion of fasteners.
- E. Provide oval alignment slots to allow for insertion of screwdriver to adjust frame.

- F. All frames to have 14 gage hinge-reinforcement with extruded tapped holes, for a minimum of 3/16" thread penetration depth.
- G. Strikes: (Provide for 2 3/4" adjustable "T") (Prepare for field applied ASA 4 7/8" as required).
- H. Provide standard field applied reinforcement for surface mounted hardware.
- J. Provide (WHI), (___) fire rated frames as shown on drawings.

2.5 Finishes

- A. Factory Finish: Impact resistant polyester baked enamel.
- B. Steel: Chemically cleaned, bonderized, primed and painted in coils. Galvanized steel prior to painting in any exterior, high humidity, or corrosive area.
- C. Provided aerosol touch-up paint for after installation, on-sight repair as recommended by manufacturer.

PART 3 EXECUTION

3.1 Examination

- A. Verify existing conditions before starting work.
- B. Verify that rough opening sizes and wall thicknesses are acceptable.
- C. Verify finish hardware requirements for each opening to provide proper reinforcement, preparation, and anchorage.

3.2 Installation

- A. Coordinate installation with other trades to avoid conflict.
- B. Use(pre-fit template door) (actual door) in opening to assure proper alignment and clearances.
- C. Anchor frame with one drywall screw adjacent to each casing clip.
- D. Align all parts with proper clearance to assure proper fit, tight miters, and desired performance.
- E. Provide instruction sheets for all frames, sidelites, and borrowed lights for field use.

3.3 Cleaning

- A. Remove all boxes, wrappers, papers and debris from each opening.
- B. Wipe frames with moist cloth and mild glass cleaner to remove grease, dust, or other debris.

3.4 Final inspection

- A. Inspect each opening for proper operation, correct hardware, general appearance and proper installation.
- B. Make any necessary adjustments.
- C. Provide product information, instruction manuals and standard warranty.
- D. Replace any frames shown to be defective under the terms of the manufacturer's warranty.



(Detailed specification available through Spec Data
MANU-SPEC Program or Timely Industries)

TIMELY INDUSTRIES LIMITED WARRANTY

S.D.S. Industries, Inc., a California Corporation D.B.A. Timely Industries (hereafter called Timely), warrants to the original consumer purchaser that its Timely Prefinished Steel Door Frame when utilized for interior frame use, will be free from defects in material and workmanship for a period of one year from the date of purchase.

This warranty is applicable only when the products covered by it:

- 1) have been installed in accordance with the recommended written installation instructions of Timely Industries and with established building practices.
- 2) have been accorded treatment which is considered good practice in the Building Industry regarding storage and maintenance.
- 3) have been subjected only to normal use because Timely Industries cannot control the manner in which its products are handled after leaving its premises. This warranty does not apply to the finish or accessories of any product and shall not apply to any frame exposed to a corrosive or humid environment.

ANY AND ALL IMPLIED WARRANTIES APPLICABLE HERETO ARE LIMITED TO ONE

YEAR FROM THE DATE OF PURCHASE. Some states do not allow limitations on how long an implied warranty lasts, so the above time limitation may not apply to you. In the event the original consumer purchaser of any Timely Industries Prefinished Steel Door Frame believes that the frame or any parts thereof covered by this warranty is defective, a letter outlining the alleged defect should be sent postage prepaid to the following address:

TIMELY INDUSTRIES, 10241 NORRIS AVENUE, PACOIMA, CA 91331

Any Timely Prefinished Steel Door Frame or any parts thereof covered by this warranty which, upon inspection by an authorized Representative of Timely Industries are found by said Representative to be defective, will at the option of Timely Industries either repair, replace, or refund the purchase price of the frame or component part. Liability is limited to repair, replacement, or refund and does not include labor, installation cost, or indirect or consequential damages of any nature. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion set forth in this paragraph may not apply to you.

TECHNICAL SUPPORT

Timely is not only recognized as the originator of the prefinished drywall frame concept, but the firm is well known for its innovative ideas, products and applications. Timely provides the services of a tool and die shop, a knowledgeable sales force and stocking distributors to satisfy your needs on time and at competitive prices. We are committed to providing nothing less than the best.

See us on the Internet at <http://www.TimelyFrames.com>



10241 NORRIS AVE. • PACOIMA, CALIFORNIA 91331-2292
(818) 492-3500 • (800) 247-6242 • FAX (818) 492-3530
9782 INTEROCEAN DRIVE, CINCINNATI, OHIO 45246
(513) 682-9600 • (800) 346-4395 • FAX (513) 682-4102

©Copyright 2002 Timely
Form No.35033A-Rev.2008 Printed in U.S.A.



LIMITED WARRANTY

TELL MANUFACTURING, INC. and **TELL DOOR AND WINDOWS, LLC**, (henceforth referred to as "TELL" or "Manufacturer") manufacturers of commercial grade door and frames, hereby offers the following described warranty.

ALL doors and door frames manufactured by the above company(s) carry a full one year warranty. Said product will be free from defects in workmanship and material for a period of one year from date of purchase. This warranty further extends to defects of splitting, cracking or deterioration due to rusting through of the product, from the date of purchase. If during this period a door or frame is found defective in workmanship or material, such claim must be submitted to Tell Manufacturing, 18 Richard Drive, Lititz, PA 17543; Attention: Claims Department. TELL reserves the right to send an approved representative to inspect on site or may require photographs be sent showing the item(s) in question. Upon inspection if the item(s) is deemed defective or faulty, Authorization for repair or replacement will be made at TELL'S option. The item(s) will be provided at no charge to the customer. No warranty is extended by the manufacturer for any field labor, travel time, or freight involving said item(s).

All products must be stored on site, installed properly and maintained in accordance with Manufacturer's instructions. This warranty shall be null and void if the product is not stored, installed properly and maintained pursuant to the Manufacturer's specifications and/or instructions. This warranty does not extend to normal wear or to damage by circumstances beyond the Manufacturer's control and is VOID when any component part or the complete door unit fails, due to the following: alteration, misuse, negligence, accident, improper installation, lightning, water damage, exposure to corrosive fumes or chemicals, condensation, fire, riots, war or any acts of God, or when performance coatings used to finish the door are not suitable. NO WARRANTY is extended by the Manufacturer for broken windows or light frames or for the indirect cost (ie. shipping, field labor) which may be required to repair or replace defective part(s). NO WARRANTY is extended by the Manufacturer for minor scratches, rubs or slight variations in color of doors and frames, as these are not considered defects.

Claims must be made within fifteen (15) calendar days of the discovery of the suspected defect and such notice shall indicate the nature of the defect. The full and proper address, contact name, and telephone number for a return reply must be included. Photographs of the problem should accompany a claim if at all possible. After receiving notification of a claim, a TELL field representative shall be permitted to inspect if needed. Inspection will be performed within a reasonable period of time, and if upon verification a defect due to defective materials or faulty workmanship on the part of the manufacturer is found, and not caused by the aforementioned exclusions, the repair(s) or replacement(s) (Manufacturer's option), exclusive of labor or freight will be made at no cost to the owner.

TELL provides product pre-painted. Each door and frame is carefully constructed of corrosion resistant galvanized/galvalume steel. All door and frame products are factory prefinished with a low gloss industrial quality paint which is designed to meet or exceed the paint requirements for steel doors and frames, as set by the Steel Door Institute. This allows a customer the option of applying a final coat of paint, or no additional painting is required to honor the 1 year warranty. No claim is made that this is to be considered a long term finish/final coat. Manufacturer does not consider minor scratches or rubs to be defects. Variations in color may occur.

Products stored "on site" awaiting building construction, must be uncrated and stored at a minimum incline of thirty degrees to allow for proper drainage and drying. Failure to do so may result in paint adhesion failure. NO WARRANTY is extended by the manufacturer for paint adhesion failure due to improper storage of the product.

THIS WARRANTY IS MADE IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED AND ALL OTHER OBLIGATIONS OR LIABILITIES OF TELL MANUFACTURING, INC. AND TELL DOOR AND WINDOW, LLC. THIS WARRANTY NEITHER ASSUMES NOR AUTHORIZES ANY PERSON TO ASSUME FOR TELL ANY OTHER OBLIGATION OR LIABILITIES IN CONNECTION WITH SAID DOORS AND FRAMES. TELL'S LIABILITY SHALL BE LIMITED TO REPLACING OR REPAIRING THE MATERIAL FOUND TO BE DEFECTIVE AND TELL SHALL NOT BE RESPONSIBLE FOR ANY INCIDENTAL OR CONSEQUENTIAL LOSS OR DAMAGES ARISING OUT OF ANY BREACH OF THIS EXPRESS LIMITED WARRANTY, including but not limited to, (1) cost of parts, labor and service charges which are performed by others at any time or place, (2) damage to buildings or other property, (3) injuries or damages sustained by any persons whomever, (4) recovery of any direct or indirect costs such as shipping, installation labor charges, paint or painting, (5) other building materials. **ALL CLAIMS UNDER THIS WARRANTY SHALL REQUIRE PROOF OF PURCHASE.**

FINISHES

Tell Manufacturing, Inc.


800-433-4047
www.tellmfg.com



US3
Bright Brass (polished finish)
US4
Satin Brass



US15
Satin Nickel

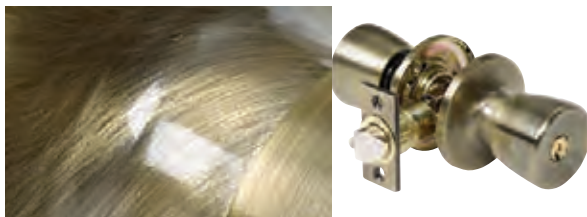

US5
Antique Brass



USP
Prime Coat



US10B
Oil Rubbed Bronze



US32D
Satin Stainless Steel
US32
Bright Stainless Steel (polished finish)



US26D
Satin Chrome
US26
Bright Chrome (polished finish)



US10
Satin Bronze

NOTE:

ACTUAL COLORS MAY VARY FROM THOSE SHOWN DUE TO LIMITATIONS OF THE PRINTING PRODUCTION PROCESS.

TELL MANUFACTURING IS FOCUSED ON SELLING COMMERCIAL DOORS AND DOOR HARDWARE.

Tell is founded and operated upon a philosophy of providing quality products at competitive prices and supported by a wealth of industry expertise and exceptional service...the incomparable definition of VALUE, unmatched by our competitors.

PRODUCTS – Our product lines consist of commercial and residential grade locksets, door closers, exit devices, door trim and commercial steel doors and frames with complete U.L. listed preparation capabilities.



CORPORATE

Tell Manufacturing
18 Richard Drive
Lititz, PA 17543

p: 717.625.2990
fx: 888.370.3253

OTHER LOCATIONS

Alabama: *Homewood*
202 Distribution Drive
Homewood, AL 35209

California: *Mira Loma*
12481 Riverside Drive
Building D #A
Mira Loma, CA 91752

Indiana: *Elkhart*
2936 Lillian Street
Elkhart, IN 46514

Texas: *Grand Prairie*
1018 Avenue M
Grand Prairie, TX 75050

Texas: *Houston*
2505 West 11th Street
Houston, TX 77008

800-433-4047 | tellmfg.com

