


Grade 1 Vertical Rod

EX7400 SERIES

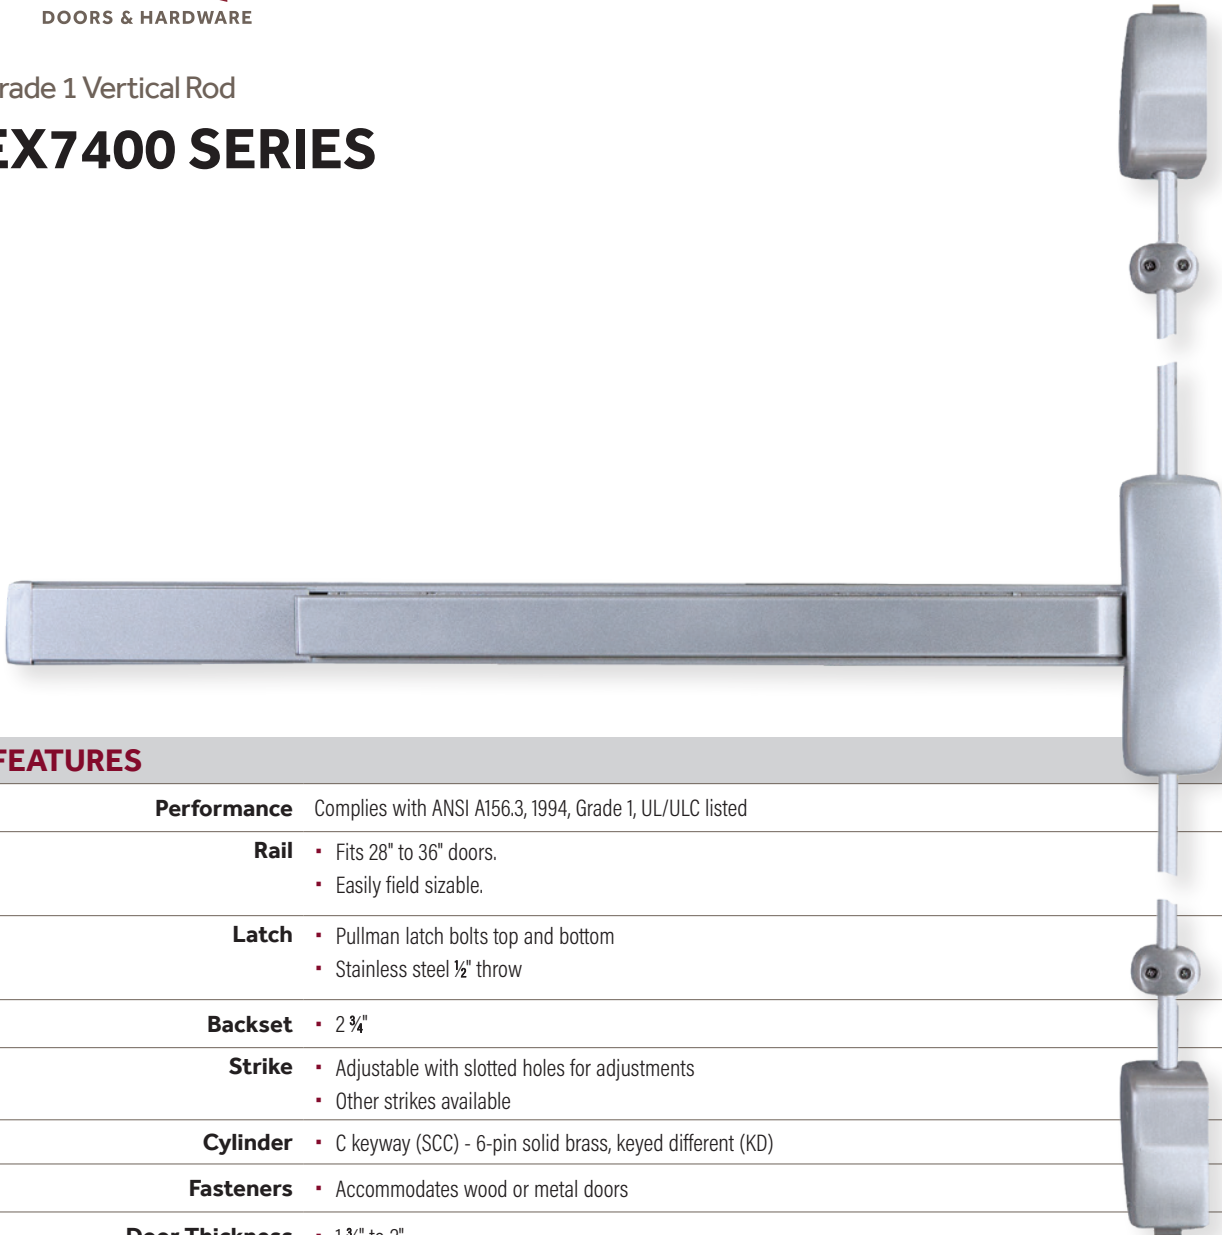

FEATURES

Performance Complies with ANSI A156.3, 1994, Grade 1, UL/ULC listed

- Rail**
- Fits 28" to 36" doors.
 - Easily field sizeable.

- Latch**
- Pullman latch bolts top and bottom
 - Stainless steel ½" throw

Backset ▪ 2 ¾"

- Strike**
- Adjustable with slotted holes for adjustments
 - Other strikes available

Cylinder ▪ C keyway (SCC) - 6-pin solid brass, keyed different (KD)

Fasteners ▪ Accommodates wood or metal doors

Door Thickness ▪ 1 ¾" to 2"

Door Preparation ▪ Surface mounted

Finishes ▪ Aluminum (AL), Satin Stainless Steel (US32D)

Warranty ▪ Lifetime limited

EX7400 SERIES

OPTIONS

KEYING 6-pin cylinders, can be pinned to 5-pin.

Cylinders Arrow A (ARA), Corbin 59A1 (C059A1), Corbin 60 (C06), Corbin Russwin L4 (CL4), Options Kwikset (KW1), Russwin D1 (RD1), Sargent LA (SAL), Schlage E (SCE), Schlage F (SCF), Weiser E (WRE), Yale 8 (YA8), Yale GA (YGA)

Tell Cylinder Restricted Tell keyway cylinder can key both the cylinder and interchangeable core in one lock. The cylinders and IC cores are interchangeable. Tell keyway cylinder is available only keyed to 6-pin. Tell IC cylinder can be keyed to 6-pin or 7-pin interchangeable core (IC)

IC Keyway Cylinders (Available 6- or 7-Pin) Best A (BA), Best B (BB), Best C (BC), Best D (BD), Best E (BE), Best F (BF), Best G (BG), Best H (BH), Best J (BJ), Best K (BK), Best L (BL), Best M (BM), Best Q (BQ), Best U (BU), Black construction core (BLK), Less core (00), Not specified (XX)

Keying Options Grand Master Key (GMK), Construction Master Key (CMK), Master Key (MK), Keyed Different (KD), Keyed Alike (KA), Interchangeable Core uncombined (IC), 0-bitted (0BIT)

RAIL Models fit 36" or 48" wide doors

EXTERIOR TRIM Exterior Blank Pull (8PDT), Exterior Pull With Cylinder Cut Out (8P03), Entry Ball Knob Trim (EMP808), Passage Ball Knob Trim (EMP875), Storeroom Ball Knob Trim (EMP886), Entry Lever Trim Without Clutch (CTL), Exterior Thumbpiece Trim (TP81), Pull Trim With Rim Cylinder (PT881), Exterior Escutcheon Lever Trim (ESCH), Heavy-Duty Escutcheon Entry Lever Trim (ESCHHD)

UL LISTED 3 hour fire rated device available

FIRE RATED UL labeled fire rated device available. Fire rated device also available for larger doors up to a maximum of 4' x 8'. Specify when ordering.

TELL FINISHES



AL
Aluminum



US32D
Satin Stainless Steel